RSX–11M/RSX–11S
Information Directory and Master Index

Order No. AA-2593G-TC

READ THIS FIRST

RSX-11M Version 4.1
RSX-11S Version 4.1

digital equipment corporation · maynard, massachusetts

First Printing, December 1977
Revised, May 1979
Revised, January 1982
Revised, April 1983

The information in this document is subject to change without notice and should not be construed as a commitment by Digital Equipment Corporation. Digital Equipment Corporation assumes no responsibility for any errors that may appear in this document.

The software described in this document is furnished under a license and may be used or copied only in accordance with the terms of such license.

No responsibility is assumed for the use or reliability of software on equipment that is not supplied by Digital Equipment Corporation or its affiliated companies.

Copyright © 1977, 1979, 1982, 1983 by Digital Equipment Corporation
All Rights Reserved.

Printed in U.S.A.

The postpaid READER'S COMMENTS form on the last page of this document requests the user's critical evaluation to assist in preparing future documentation.

The following are trademarks of Digital Equipment Corporation:

DEC	DIBOL	RSX
DEC/CMS	EduSystem	UNIBUS
DEC/MMS	IAS	VAX
DECnet	MASSBUS	VMS
DECsystem-10	PDP	VT
DECSYSTEM-20	PDT	digital
DECUS	RSTS	
DECwriter		

ZK2252

HOW TO ORDER ADDITIONAL DOCUMENTATION

In Continental USA and Puerto Rico call 800-258-1710

In New Hampshire, Alaska, and Hawaii call 603-884-6660

In Canada call 613-234-7726 (Ottawa-Hull)
800-267-6146 (all other Canadian)

DIRECT MAIL ORDERS (USA & PUERTO RICO)*

Digital Equipment Corporation
P.O. Box CS2008
Nashua, New Hampshire 03061

*Any prepaid order from Puerto Rico must be placed with the local Digital subsidiary (809-754-7575)

DIRECT MAIL ORDERS (CANADA)

Digital Equipment of Canada Ltd.
940 Belfast Road
Ottawa, Ontario K1G 4C2
Attn: A&SG Business Manager

DIRECT MAIL ORDERS (INTERNATIONAL)

Digital Equipment Corporation
A&SG Business Manager
c/o Digital's local subsidiary or approved distributor

Internal orders should be placed through the Software Distribution Center (SDC), Digital Equipment Corporation, Northboro, Massachusetts 01532

CONTENTS

		Page
PREFACE		v
1.0	GETTING STARTED	1
2.0	HOW THE MANUALS ARE ORGANIZED	1
3.0	INTENDED READING AUDIENCES FOR RSX-11M/RSX-11S MANUALS	3
4.0	RSX-11M DOCUMENTATION DESCRIPTIONS	6
4.1	Volume 1: Introduction	6
4.1.1	RSX-11M Software Product Description	6
4.1.2	RSX-11M/RSX-11S Information Directory and Master Index	6
4.1.3	RSX-11M/RMS-11/RSX-11S Release Notes	7
4.1.4	Introduction to RSX-11M and RSX-11M-PLUS	7
4.2	Volume 2: Operation	7
4.2.1	RSX-11M System Generation and Installation Guide	7
4.2.2	RSX-11M/M-PLUS MCR Operations Manual	7
4.2.3	RSX-11M/M-PLUS MCR Operations Manual Update Notice No. 1	7
4.2.4	RSX-11M/M-PLUS Command Language Manual	8
4.2.5	RSX-11M/M-PLUS Batch and Queue Operations Manual	8
4.3	Volume 3: Utilities	8
4.3.1	RSX-11M/M-PLUS Utilities Manual	8
4.3.2	RSX-11M/M-PLUS Utilities Manual Update Notice No. 1	9
4.3.3	EDT Editor Manual	9
4.4	Volume 4: Program Development	9
4.4.1	RSX-11M/M-PLUS Guide to Program Development	9
4.4.2	PDP-11 MACRO-11 Language Reference Manual	10
4.4.3	IAS/RSX-11 I/O Operations Reference Manual	10
4.4.4	IAS/RSX-11 System Library Routines Reference Manual	10
4.4.5	IAS/RSX-11 ODT Reference Manual	10
4.4.6	RSX-11M/M-PLUS Task Builder Manual	10
4.4.7	RSX-11M/M-PLUS Executive Reference Manual	11
4.5	Volume 5: I/O Drivers Development and Reference	11
4.5.1	RSX-11M Guide to Writing an I/O Driver	11
4.5.2	RSX-11M/M-PLUS I/O Drivers Reference Manual	11
4.5.3	RSX-11M/M-PLUS I/O Drivers Reference Manual Update Notice No. 1	11
4.6	Volume 6: System Management and Maintenance	12
4.6.1	RSX-11M/M-PLUS System Management Guide	12
4.6.2	RSX-11M/M-PLUS System Management Guide Update Notice No. 1	12
4.6.3	RSX-11M/M-PLUS Error Logging Manual	13
4.6.4	RSX-11M/M-PLUS Crash Dump Analyzer Reference Manual	13

Page

4.7 Volume 7: PDP-11 Record Management Services . . 13
4.7.1 RSX-11M/M-PLUS RMS-11: An Introduction 13
4.7.2 RSX-11M/M-PLUS RMS-11 User's Guide 13
4.7.3 RSX-11M/M-PLUS RMS-11 Utilities 14
4.7.4 RSX-11M/M-PLUS RMS-11 Macro Programmmer's Guide 14
4.8 RSX-11M Mini-Reference 15
4.9 EDT Editor Reference Card 15
4.10 PDP-11 Programming Card 15
5.0 RSX-11S DOCUMENTATION 15
5.1 How the RSX-11S Manuals Are Organized 16
5.2 RSX-11S-Specific Manuals 16
5.2.1 RSX-11S Software Product Description (Order No. AE-3427N-TC) 16
5.2.2 RSX-11S System Generation and Installation Guide (Order No. AA-2874E-TC) 16
5.2.3 RSX-11S System Generation and Installation Guide Update Notice No. 1 (Order No. AD-2874E-51) 17
5.3 Host System Manuals 17
6.0 INTRODUCTION TO THE MASTER INDEX 18
6.1 Format of the Master Index 18
6.2 Manuals Included in the Master Index 19

MASTER INDEX

FIGURES

FIGURE 1 Suggested Sequence for Reading RSX-11M/RSX-11S Manuals 2

TABLES

TABLE 1 RSX-11M Documentation Set 3

PREFACE

MANUAL OBJECTIVES

The RSX-11M/RSX-11S Information Directory and Master Index introduces the RSX-11M and RSX-11S documentation sets. It includes an overview of all the manuals and a Master Index that will be useful for referring to topics throughout the documentation. The descriptions of the manuals are intentionally brief; refer to the prefaces of individual manuals for additional information. Read the Information Directory before you read other manuals in the documentation set or use the system.

INTENDED AUDIENCE

The RSX-11M/RSX-11S Information Directory and Master Index is intended for all users of the RSX-11M and RSX-11S operating systems. No previous knowledge of the systems is required.

STRUCTURE OF THIS DOCUMENT

The first part of the manual briefly describes the documents in the set. It tells which kinds of users are likely to be interested in which documents, and suggests a sequence for reading them. The second part of the manual is a Master Index to all the documents.

ASSOCIATED DOCUMENTS

The next manual you should read in this documentation set is the RSX-11M/RMS-11/RSX-11S Release Notes, which will give you important information on the RSX-11M and RSX-11S software and documentation.

1.0 GETTING STARTED

Your kit contains an RSX-11M/RSX-11S baseline system that is ready to run on your PDP-11 processor. You will use this baseline system to generate an operating system tailored to your own particular hardware and software requirements.

Before beginning system generation, you should become familiar with your hardware configuration and with this documentation set; and you should thoroughly read the RSX-11M/RMS-11/RSX-11S Release Notes and the appropriate System Generation and Installation Guide (RSX-11M or RSX-11S). Then you will be prepared to choose among the options offered during system generation.

Figure 1 outlines a suggested sequence for reading the manuals in your documentation set. The sequence is from introductory and more general manuals to advanced manuals that assume a greater understanding of the system.

2.0 HOW THE MANUALS ARE ORGANIZED

The RSX-11M manuals are organized into seven volumes:

1. Introduction
2. Operation
3. Utilities
4. Program Development
5. I/O Drivers Development and Reference
6. System Management and Maintenance
7. PDP-11 Record Management Services

RSX-11S users should refer to Section 5.0 for the organization of the RSX-11S documentation set.

Each volume consists of one or more ring binders, and each binder contains two or more manuals. Refer to Table 1 for a complete list of the manuals.

The EDT Editor Reference Card and the PDP-11 Programming Card are packaged separately; the RSX-11M Mini-Reference is also separate, coming with its own small binder.

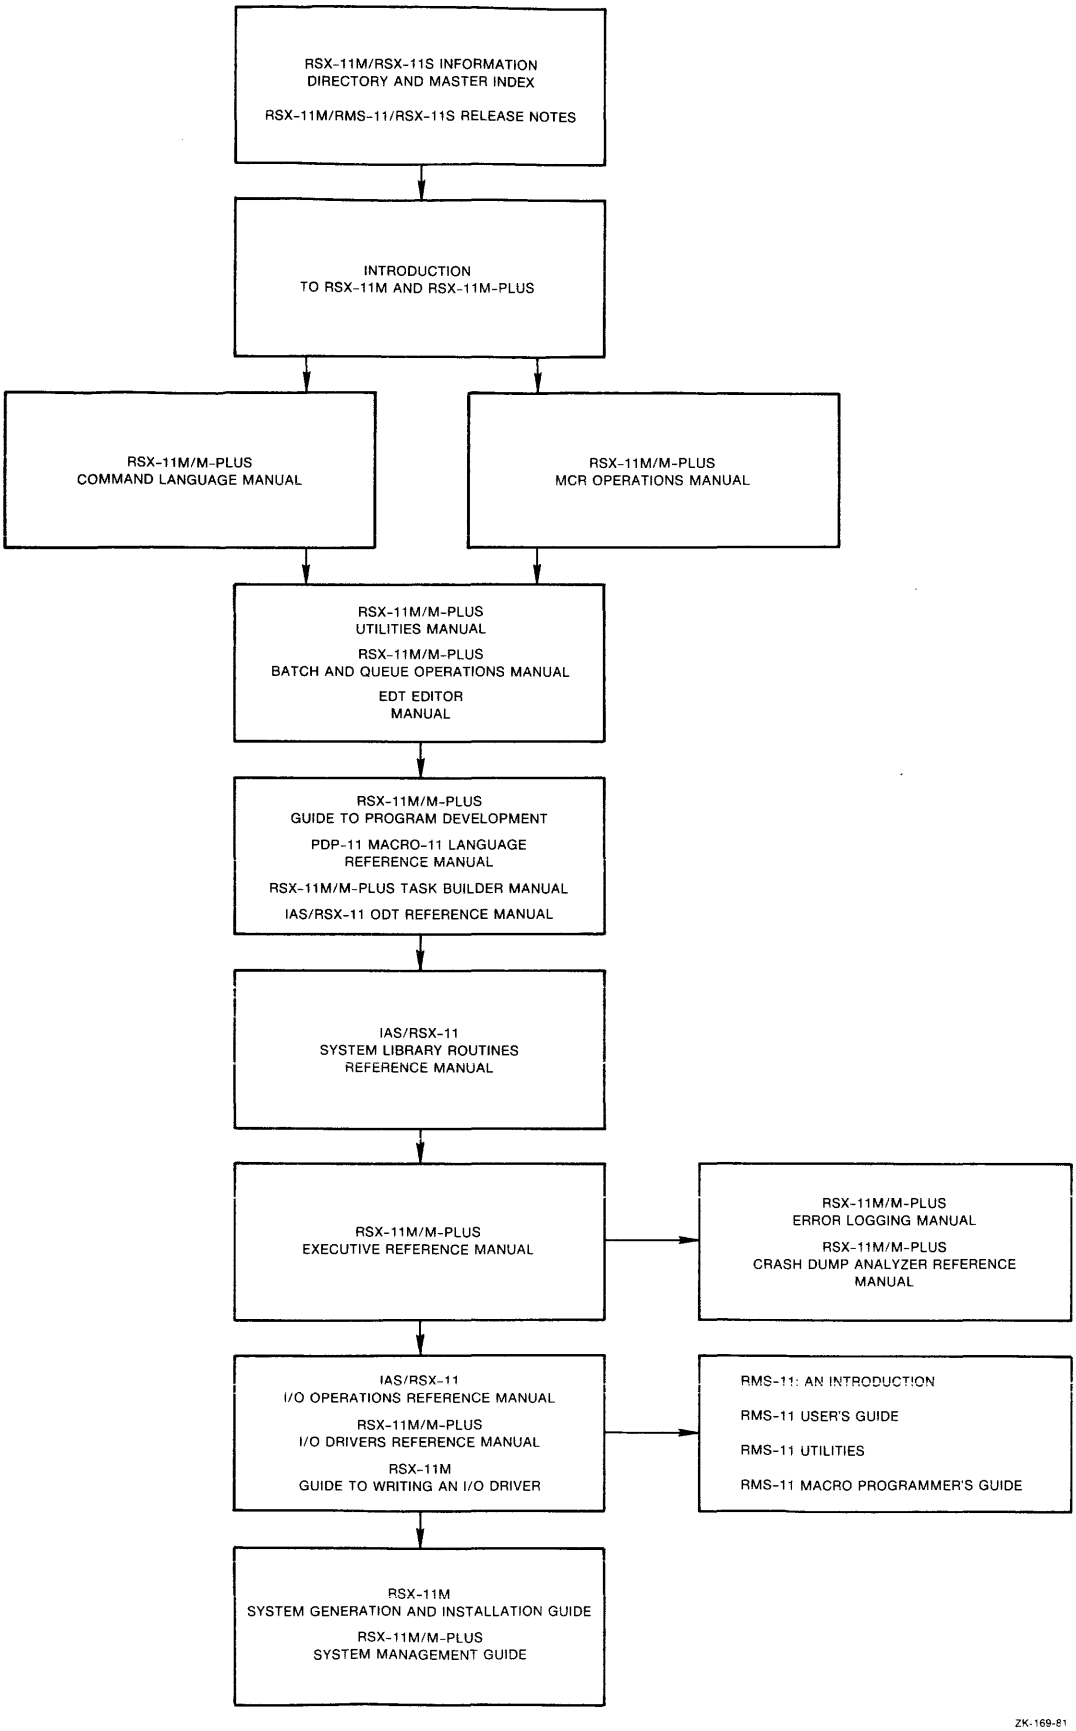

Figure 1 Suggested Sequence for Reading RSX-11M/RSX-11S Manuals

3.0 INTENDED READING AUDIENCES FOR RSX-11M/RSX-11S MANUALS

Table 1 lists the intended reading audience for each document in your set. The audience is divided into the loosely defined groups listed as follows (and indicated in Table 1 by an X in one or more of the columns):

US The user: anyone who types at a terminal on an RSX-11M or RSX-11S operating system.

AP The applications programmer: anyone who uses the MACRO-11 assembly language or a high-level language to develop programs for user applications.

SP The system programmer: anyone who uses MACRO-11 to maintain, modify, and develop software used by the applications programmer or the user.

SM The system manager: the person familiar with and responsible for overall operation of an RSX-11M or RSX-11S system and its associated hardware.

Table 1 lists the manuals that are RSX-11M-specific and also those that are common to RSX-11M and RSX-11S. RSX-11S users should refer to Section 5.0 for a descriptive list of the manuals included in the RSX-11S documentation set.

Table 1
RSX-11M Documentation Set
Kit Number QJ628-GZ

Volume	Title and Order Number	Suggested Audience US	AP	SP	SM
-	**Handy Reference Materials**				
	RSX-11M Mini-Reference AV-5570E-TC	X	X	X	X
	EDT Editor Reference Card AV-J756A-TC	X	X	X	X
	PDP-11 Programming Card EH-S1046-78		X	X	X
1	**Introduction**				
	RSX-11M Software Product Description AE-3407U-TC	X	X	X	X
	RSX-11M/RSX-11S Information Directory and Master Index AA-2593G-TC	X	X	X	X
	RSX-11M/RMS-11/RSX-11S Release Notes AA-2573H-TC	X	X	X	X
	Introduction to RSX-11M and RSX-11M-PLUS AA-L763A-TC	X	X	X	X

(continued on next page)

Table 1 (Cont.)
RSX-11M Documentation Set
Kit Number QJ628-GZ

Volume	Title and Order Number	Suggested Audience US	AP	SP	SM
2	**Operation**				
	RSX-11M System Generation and Installation Guide AA-H625C-TC			X	X
	RSX-11M/M-PLUS MCR Operations Manual AA-L678A-TC	X	X	X	X
	RSX-11M/M-PLUS MCR Operations Manual Update Notice Number 1 AD-L678A-T1				
	RSX-11M/M-PLUS Command Language Manual AA-L672B-TC	X	X	X	X
	RSX-11M/M-PLUS Batch and Queue Operations Manual AA-L671A-TC	X	X	X	X
3	**Utilities**				
	RSX-11M/M-PLUS Utilities Manual AA-L681A-TC	X	X	X	X
	RSX-11M/M-PLUS Utilities Manual Update Notice Number 1 AD-L681A-T1				
	EDT Editor Manual AA-J726A-TC	X	X	X	X
4	**Program Development**				
	RSX-11M/M-PLUS Guide to Program Development AA-L676A-TC		X	X	X
	PDP-11 MACRO-11 Language Reference Manual AA-V027A-TC		X	X	X
	IAS/RSX-11 I/O Operations Reference Manual AA-M176A-TC		X	X	
	IAS/RSX-11 System Library Routines Reference Manual AA-5580B-TC		X	X	

(continued on next page)

Table 1 (Cont.)
RSX-11M Documentation Set
Kit Number QJ628-GZ

Volume	Title and Order Number	Suggested Audience US	AP	SP	SM
	IAS/RSX-11 ODT Reference Manual AA-M507A-TC		X	X	X
	RSX-11M/M-PLUS Task Builder Manual AA-L680B-TC		X	X	X
	RSX-11M/M-PLUS Executive Reference Manual AA-L675A-TC		X	X	
5	**I/O Drivers Development and Reference**				
	RSX-11M Guide to Writing an I/O Driver AA-2600E-TC			X	
	RSX-11M/M-PLUS I/O Drivers Reference Manual AA-L677A-TC			X	
	RSX-11M/M-PLUS I/O Drivers Reference Manual Update Notice Number 1 AD-L677A-T1				
6	**System Management and Maintenance**				
	RSX-11M/M-PLUS System Management Guide AA-L679B-TC			X	X
	RSX-11M/M-PLUS System Management Guide Update Notice Number 1 AD-L679B-T1				
	RSX-11M/M-PLUS Error Logging Manual AA-L674B-TC			X	X
	RSX-11M/M-PLUS Crash Dump Analyzer Reference Manual AA-L673B-TC			X	X
7	**PDP-11 Record Management Services**				
	RSX-11M/M-PLUS RMS-11: An Introduction AA-L682A-TC	X	X	X	X

(continued on next page)

Table 1 (Cont.)
RSX-11M Documentation Set
Kit Number QJ628-GZ

Volume	Title and Order Number	Suggested Audience US	AP	SP	SM
	RSX-11M/M-PLUS RMS-11 User's Guide AA-L669A-TC		X		X
	RSX-11M/M-PLUS RMS-11 Utilities AA-L670A-TC	X	X	X	X
	RSX-11M/M-PLUS RMS-11 Macro Programmer's Guide AA-L668A-TC		X	X	

4.0 RSX-11M DOCUMENTATION DESCRIPTIONS

Following are brief descriptions of the volumes and the individual manuals in the RSX-11M documentation set. For a complete description of any manual, read its preface.

RSX-11S users should now refer to Section 5.0 for a list of the documents included in their RSX-11S set (most of which are common to RSX-11S and RSX-11M), and then return to Section 4.0 for descriptions. (The two RSX-11S-specific documents are described in Section 5.0 only.)

4.1 Volume 1: Introduction

This volume includes manuals that introduce the RSX-11M documentation set and operating system.

4.1.1 **RSX-11M Software Product Description** - The Software Product Description (SPD) concisely describes the functional characteristics and system environment of RSX-11M. It identifies the required and optional hardware and software along with the available training credits and additional services. It includes information on installation requirements and software product support, and gives ordering information.

4.1.2 **RSX-11M/RSX-11S Information Directory and Master Index** - This manual orients the reader to the RSX-11M/RSX-11S documentation set. It includes descriptions of the manuals, a suggested sequence for reading them, their intended audiences, and a Master Index to the documentation set. The Master Index should prove very useful: It comprises all the topics in the individual manuals' indexes, without abridgement, and will tell you which manual(s) and page number(s) have the information you need on a topic.

4.1.3 **RSX-11M/RMS-11/RSX-11S Release Notes** - This manual is crucial, as it summarizes the new software features for RSX-11M Version 4.1 and RSX-11S Version 4.1, as well as RMS-11 Version 2.0. It tells you which manuals to go to for complete information on these new features. Incompatibilities between the current and previous versions are discussed; and procedures are described for applying corrections to files on the source disk and reporting any problems of the new software. Be sure to read the Release Notes before generating and using your system.

4.1.4 **Introduction to RSX-11M and RSX-11M-PLUS** - This tutorial manual is a simple, step-by-step introduction for new users of the RSX-11M and RSX-11M-PLUS operating systems. In an interactive terminal session, using prepared demonstration files, new users can log in and learn by practicing. The DIGITAL Command Language, the interactive text editor EDT, and the program development facilities are demonstrated. After guiding the user through the practice session, the manual discusses some general system concepts and features. It has a useful glossary that defines system terms in some detail.

4.2 Volume 2: Operation

The operation volume explains how to generate and install your RSX-11M Version 4.1 system. It also documents the Monitor Console Routine (MCR), the DIGITAL Command Language (DCL), and batch and queue operations.

4.2.1 **RSX-11M System Generation and Installation Guide** - This manual is a step-by-step guide to the system generation procedure. It outlines procedures for bootstrap-loading a baseline system, and explains the SYSGEN questions and the results that occur from your responses. Annotated examples of system generations are given.

4.2.2 **RSX-11M/M-PLUS MCR Operations Manual** - This manual describes the Monitor Console Routine (MCR) and the Indirect Command Processor (Indirect).

MCR is a command line interpreter, an interface for communication between you and the RSX-11M system. This manual describes MCR commands and their formats and tells you how to use MCR. File ownership and file protection are explained. An alphabetical list of MCR and TKTN (Task Termination Notification program) messages is given in an appendix.

Indirect allows you to process files that contain Indirect, MCR, DCL, or utility commands. These commands are executed as though they had been entered from a terminal. The Indirect chapter describes the Indirect commands, symbols, and functions, and presents actual examples.

4.2.3 **RSX-11M/M-PLUS MCR Operations Manual Update Notice No. 1** - This update corrects errors in the manual and documents new features and devices.

4.2.4 **RSX-11M/M-PLUS Command Language Manual** - You may prefer to use the DIGITAL Command Language (DCL), rather than MCR, to communicate with the RSX-11M system. DCL provides direct, transparent access to most common MCR and utility functions. This manual is organized by system functions; it gives full descriptions of all DCL commands, with examples and notes on their usage.

4.2.5 **RSX-11M/M-PLUS Batch and Queue Operations Manual** - This manual explains the use of the Queue Manager (QMG) to control print queue functions, and describes in detail the QMG commands that control these functions. Error messages are explained in the appendix, and there is a glossary of terms.

4.3 Volume 3: Utilities

This volume contains two manuals, the RSX-11M/M-PLUS Utilities Manual and the EDT Editor Manual. The RSX-11M/M-PLUS Utilities Manual describes utilities that allow you to manipulate different kinds of files and their contents and perform operations on supported media. The EDT Editor Manual describes the function and operation of the interactive text editor EDT.

4.3.1 **RSX-11M/M-PLUS Utilities Manual** - This manual describes the functions and operations of the following RSX-11M/M-PLUS utility programs:

- EDI - Line Text Editor. EDI is a line-oriented, interactive editor used to create and maintain text and source files.
- PIP - Peripheral Interchange Program. PIP copies files and performs file control functions.
- FLX - File Transfer Utility Program. FLX is a file transfer and format conversion program that transfers files among DOS-11, RT-11, and Files-11 volumes.
- FMT - Disk Volume Formatter Utility. FMT formats and verifies several types of Files-11 disks.
- BAD - Bad Block Locator Utility. BAD determines the number and location of bad blocks on a volume.
- BRU - Backup and Restore Utility. Backing up files both compresses the files and safeguards them against loss. BRU backs up files from a Files-11 volume to one or more backup volumes, and retrieves them as needed.
- DSC - Disk Save and Compress Utility Program. DSC copies Files-11 disk files to tape or disk, and from DSC-created tape back to disk. (DSC's functions are largely similar to BRU's.)
- VFY - File Structure Verification Utility. VFY verifies the consistency and validity of the file structure on a Files-11 volume.
- LBR - Librarian Utility Program. LBR is a library maintenance program that creates and modifies library files.

- DMP - File Dump Utility Program. DMP is a file listing program that allows you to examine the contents of a single file or a volume of files.
- CMP - File Compare Utility. CMP compares two text files, record by record, and lists the differences between them.
- SLP - Source Language Input Program. SLP is a noninteractive editing program that is used to maintain and edit source files.
- PAT - Object Module Patch Utility. PAT updates, or patches, relocatable binary object modules.
- ZAP - Task/File Patch Program. ZAP is a patch utility that examines and directly modifies locations in a task image file or data file.

For each utility in turn, this manual explains the utility's use, describes its commands and switches, and gives detailed command formats and syntax rules.

4.3.2 **RSX-11M/M-PLUS Utilities Manual Update Notice No. 1** - This update concerns two utilities, BRU and ZAP. It documents BRU's new multivolume disk operations, lists new BRU error messages, and gives new examples. For ZAP, it adds a description of the /LI switch and I- and D-space tasks and gives new examples.

4.3.3 **EDT Editor Manual** - This manual explains how to use the interactive text editor EDT to create and update ASCII text files. It explains the command line, keypad editing, line editing, nokeypad editing, and the redefining of keys. It also presents sample editing sessions.

4.4 Volume 4: Program Development

The first manual in this volume gives an overview of the program development process. The remaining manuals further explain the process by describing the MACRO-11 assembly language, I/O operations, system library routines, the On-Line Debugging Tool, the Task Builder, and the Executive.

4.4.1 **RSX-11M/M-PLUS Guide to Program Development** - This manual is a step-by-step guide to program development for the beginning MACRO-11 programmer. The manual describes the hardware and software necessary for program development and explains how to create, assemble, task-build, debug, and maintain MACRO-11 programs. It also introduces the use of the Librarian Utility Program (LBR) for creating and maintaining user, macro, and object libraries. A brief description of FORTRAN program development is included, to orient the FORTRAN programmer. Examples are given for all steps in the program development process.

This guide is intended to be used together with other, more advanced manuals until you become familiar with the process; this manual can then serve as a refresher.

4.4.2 **PDP-11 MACRO-11 Language Reference Manual** - This manual describes how to use the MACRO-11 Assembler to code MACRO-11 programs. It includes descriptions of MACRO-11 features, directives for conditional assembly and program sectioning, and user-defined and system macro libraries. It also documents RSX-11M operating procedures and error messages. Before reading the MACRO-11 Language Reference Manual, you should be familiar with your PDP-11 processor and the related terminology, as presented in the PDP-11 Processor Handbook.

4.4.3 **IAS/RSX-11 I/O Operations Reference Manual** - This manual provides reference material on RSX-11M File Control Services (FCS). It explains how to use FCS to create, use, and delete files under program control. You should be familiar with MACRO-11 or FORTRAN program development procedures before using FCS.

The manual also describes the following:

- The Get Command Line subroutine (GCML) - GCML provides a device-independent interface for user programs retrieving command lines from either a terminal or a disk file.
- The Command String Interpreter (CSI) - CSI parses command lines containing file specifications and switches.
- The Table-Driven Parser (TPARS) - TPARS parses command lines at two levels, a syntactical level and a semantic level. It is generated by user-generated parse tables.

Descriptions of ANSI magtape support, unlabeled tape support, and the MAG SET command are included.

4.4.4 **IAS/RSX-11 System Library Routines Reference Manual** - This manual describes register handling and arithmetic routines, input and output data conversion routines, output formatting routines, and dynamic memory management and virtual memory management routines. For the more experienced programmer, a list of summary procedures is included.

4.4.5 **IAS/RSX-11 ODT Reference Manual** - This manual describes the use of the On-Line Debugging Tool (ODT) for debugging a task. Actual ODT command sequences are given, followed by explanatory text. Before reading this manual, you should be familiar with the MACRO-11 assembly language and the Task Builder.

4.4.6 **RSX-11M/M-PLUS Task Builder Manual** - This manual describes the concepts and capabilities of the RSX-11M/M-PLUS Task Builder (TKB), the linker that produces executable task images (programs that are ready to be installed and run). It contains both programmer reference and operating information, including Task Builder allocation of virtual address space, resolution of global symbols, overlaying capability, and the building of shared regions.

Before reading this manual, you should be familiar with the procedures described in the RSX-11M/M-PLUS MCR Operations Manual and the RSX-11M/M-PLUS Command Language Manual, as well as the programming concepts discussed in the RSX-11M/M-PLUS Guide to Program Development.

4.4.7 **RSX-11M/M-PLUS Executive Reference Manual** - This manual describes the RSX-11M/M-PLUS Executive services available for user tasks and the Executive (system) directives you need to obtain them. You must know how to develop user programs in MACRO-11 or FORTRAN to be able to use the Executive services.

4.5 Volume 5: I/O Drivers Development and Reference

This volume consists of manuals that describe the writing and the function of I/O drivers on an RSX-11M system.

4.5.1 **RSX-11M Guide to Writing an I/O Driver** - This guide is an aid in writing an I/O driver to service a peripheral device for which DIGITAL does not supply a driver. It includes information on incorporating a user-written driver in a system, and on debugging a driver with the Executive Debugging Tool (XDT). A summary of Executive routines that a driver can call is provided.

The manual assumes that you fully understand the operation of the device for which you require a driver. You must also be familiar with your PDP-11 processor, its peripheral devices, and the software supplied with the RSX-11M system.

4.5.2 **RSX-11M/M-PLUS I/O Drivers Reference Manual** - This manual describes the functions of all DIGITAL-supplied I/O drivers. It provides the data needed by the experienced programmer who wants the advantages in space and time of directly interfacing with I/O drivers.

This manual describes the Files-11 Ancillary Control Processor (F11ACP) and the Magtape Ancillary Control Processor (MTAACP) and documents the QIOs performed by these processors.

4.5.3 **RSX-11M/M-PLUS I/O Drivers Reference Manual Update Notice No. 1** - This update corrects errors in the manual and includes the following new device support:

- Terminal driver support has been added for the DHV11 terminal interface and the LQP02 and LA50 terminals.
- Disk driver support has been added for the following new disk devices:

  UDA50/RA81
  UDA50/RA60
  RC25
  RD51
  RX50

- Magnetic tape driver support has been added for the TU80 and TSV05.
- Line printer driver support has been added for the LN01 laser printer.

4.6 Volume 6: System Management and Maintenance

This volume consists of a set of manuals that tell you how to ensure that your system operates correctly and effectively. The manuals describe system management programs and the RSX-11M/M-PLUS Error Logging System, and explain how to use diagnostic software and how to retrieve information to determine the causes of system crashes.

4.6.1 **RSX-11M/M-PLUS System Management Guide** - This manual documents the following programs that the system manager can use to test, monitor, maintain, and customize an RSX-11M operating system:

- ACNT - Account File Maintenance Program: You use this program to create and maintain accounts on multiuser protection systems.
- CODRV and COT - Console Logger: This program handles I/O to the console output device and records system messages at a terminal and/or in a log file.
- IOX - I/O Exerciser: This program detects and diagnoses I/O problems on tape and disk units.
- RCT - Bad Block Replacement Control Task: This task performs bad block handling and recovery on Mass Storage Control Protocol devices.
- RMD - Resource Monitoring Display: This program displays information about your system's active tasks and available resources.
- SHUTUP - System shutdown task: This task shuts down the system in an orderly fashion.
- UETP - User Environment Test Package: You can run this program after system generation, to verify that you have generated a working operating system, or at any other time, to validate the proper functioning of the operating system.
- VMR - Virtual Monitor Console Routine: VMR consists of a subset of MCR commands that you can use to alter a system image file.
- SHF - Shuffler: This task compresses space in system-controlled partitions when a memory allocation failure occurs.

The manual includes information on pool monitoring support and the PMT program; how to set up and run the Queue Manager; how to extend and alter DCL; and how to write command line interpreters (CLIs). The serial despooler is described in an appendix.

4.6.2 **RSX-11M/M-PLUS System Management Guide Update Notice No. 1** - This update primarily concerns VMR. It corrects errors in the manual and documents new features and devices.

4.6.3 **RSX-11M/M-PLUS Error Logging Manual** - This manual explains the RSX-11M/M-PLUS Error Logging System, a combination of tasks that collect and report information about hardware-related events on an RSX-11M system. The Error Logging System allows you to generate event reports in brief or full format, including information on the state of the system or hardware at the time the event occurred.

The manual includes chapters on:

- Using the Error Log Task (ERRLOG) and the Error Log Interface (ELI). ERRLOG gets error information from the Executive and drivers and writes the information into the Error Log File, and ELI sends user commands to ERRLOG.
- Using the Report Generator (RPT) to generate Error Log Reports from the Error Log File.
- Using the Control File Language compiler (CFL) procedures to update and modify DIGITAL-supplied control file modules, or to add error-logging support for non-DIGITAL devices.

4.6.4 **RSX-11M/M-PLUS Crash Dump Analyzer Reference Manual** - This manual explains how to use the Crash Dump Analyzer (CDA) to determine the causes of system crashes. It contains operating instructions, descriptions of CDA switches and error messages, examples of CDA output listings, and an explanation of how to interpret the output listings. The manual also includes system symbolic and data structure macro definitions.

4.7 Volume 7: PDP-11 Record Management Services

This volume is composed of a set of manuals that describe the Record Management Services (RMS-11). For information on where the RMS-11 files and utilities can be found on the RSX-11M distribution kit, see the RSX-11M System Generation and Installation Guide.

4.7.1 **RSX-11M/M-PLUS RMS-11: An Introduction** - This manual introduces the major concepts of RMS-11: record formats, file organizations, and record access modes. It introduces the RMS-11 operations and utility programs, and defines the key terms necessary to understand RMS-11 capabilities and functions.

The manual is intended for all users of RMS-11, including both MACRO-11 and high-level language programmers. Nonprogramming users, programming users who are new to RSX-11M/M-PLUS, and RSX-11M/M-PLUS programmers who are new to RMS-11 should find this document especially useful.

The manual does not provide reference or usage information, but should be read before the other RMS-11 documents.

4.7.2 **RSX-11M/M-PLUS RMS-11 User's Guide** - This manual is a guide to using RMS-11 in file and task design for application programs written in either MACRO-11 or high-level languages. It is intended for application programmers who want to achieve optimal performance either with a new application they are writing or with an existing application that no longer performs satisfactorily.

The manual first presents general design considerations to help users select the appropriate file organization for their applications. Then the details of file structure, design, and processing are discussed for each of the three RMS-11 file organizations: sequential, relative, and indexed. Finally, the manual describes techniques that can be used to optimize application program performance, regardless of file organization.

Note that only MACRO-11 programmers can use the full set of RMS-11 capabilities. Subsets of those capabilities are available to high-level language programmers. Programmers who are writing applications in high-level languages should consult their language documentation for details on RMS-11 support.

4.7.3 **RSX-11M/M-PLUS RMS-11 Utilities** - This reference manual describes the utility programs supported by RMS-11. It is intended for users such as high-level language programmers and nonprogramming users (system managers and operators, for example) who either do not require or do not have access to the full set of RMS-11 capabilities.

The RMS-11 utility programs are the following:

- RMS-11 File Design Utility (RMSDES) - An interactive utility for designing and creating sequential, relative, and indexed files.
- RMS-11 Indexed File Load Utility (RMSIFL) - Reads records from an RMS-11 file of any kind of organization and loads them into an indexed file, optimizing all indexes, both primary and alternates (if any).
- RMS-11 File Conversion Utility (RMSCNV) - Reads records from an RMS-11 file of any organization and loads them into another RMS-11 file of any organization. Note that RMSCNV, unlike RMSIFL, optimizes only the primary index when it loads an indexed file.
- RMS-11 File Display Utility (RMSDSP) - Produces a concise description of any RMS-11 file, including backup files.
- RMS-11 File Back-Up Utility (RMSBCK) - Transfers the contents of an RMS-11 file to another file, on another device, to preserve it should the original file be lost or damaged.
- RMS-11 File Restoration Utility (RMSRST) - Restores files that were backed up by RMSBCK, so that they can be accessed by user programs.

The manual also documents RMSDEF, which has been superseded by RMSDES.

4.7.4 **RSX-11M/M-PLUS RMS-11 Macro Programmmer's Guide** - This document is a reference manual describing the macros and symbols that make up the interface between a MACRO-11 program and the RMS-11 operation routines. It is intended for both MACRO-11 programmers and for high-level language programmers who want to use the full set of RMS-11 capabilities in a MACRO-11 subprogram.

The manual presents such programming considerations as how to use RMS-11 macros and symbols in a MACRO-11 program, how to use the directory and file operations to process directories and files, and how to use the stream operations and record or block operations to process records or blocks.

Detailed reference information is provided on each RMS-11 operation macro, the control blocks it uses, the options that can be specified in each control block field, and the values returned in control block fields. A summary of each control block, field, value, and mask is also provided.

In addition, the manual documents the RMS-11 completion codes, fatal error codes, and assembly-time messages.

4.8 RSX-11M Mini-Reference

This small manual is a convenient reference for all system users. It includes sections on the Monitor Console Routine (MCR), the DIGITAL Command Language (DCL), the Task Builder (TKB), the RSX-11M/M-PLUS utilities, the On-Line Debugging Tool (ODT), the Error Logging System, the Queue Manager (QMG), the I/O error codes, the directive error codes, the Executive directive summary, the RMS-11 utilities, and the RMS-11 error codes. The manual also includes Radix-50 conversion tables and the ASCII character set.

4.9 EDT Editor Reference Card

This reference card describes keypad editing for the DIGITAL VT52 and VT100 video terminals. It presents common keyboard functions and gives instructions for beginning and ending an editing session. Keypad diagrams for the VT52 and VT100 terminals are included.

4.10 PDP-11 Programming Card

This card includes programming information on the following major topics:

- PDP-11 addressing modes
- Single operand instructions
- Double operand instructions
- Processor register addresses
- Device register addresses
- 7-bit ASCII code
- Bootstrap loader starting addresses and device vectors

5.0 RSX-11S DOCUMENTATION

Included with the RSX-11S software is the RSX-11S documentation set. This set of manuals describes the host operating system as well as the RSX-11S operating system. It is important that you read thoroughly the RSX-11M/RMS-11/RSX-11S Release Notes before reading other manuals in the documentation set and generating your system.

This section briefly describes the RSX-11S manuals. See Table 1 for the manuals' order numbers and intended audiences, and see Section 4 for fuller descriptions of their contents. (Two documents, however, are found exclusively in the RSX-11S set and hence are not included with the RSX-11M/RSX-11S documents in Table 1 and Section 4: the RSX-11S Software Product Description and the RSX-11S System Generation and Installation Guide. Information on these two documents is given in Section 5.2.)

The Kit Number for the RSX-11S documentation set is QJ642-GZ.

5.1 How the RSX-11S Manuals Are Organized

The RSX-11S manuals are organized into five volumes:

1. Introduction
2. Operation
3. Program Development
4. I/O Drivers Development and Reference
5. System Management and Maintenance

5.2 RSX-11S-Specific Manuals

The RSX-11S Software Product Description and the RSX-11S System Generation and Installation Guide are found exclusively in the RSX-11S documentation set and therefore have not been previously described in this manual.

5.2.1 **RSX-11S Software Product Description (Order No. AE-3427N-TC)** - The Software Product Description (SPD) concisely describes the functional characteristics and system environment of RSX-11S. It identifies the required and optional hardware and software, along with the available training credits and additional services. It includes information on installation requirements and software product support, and gives ordering information.

This document is intended for all RSX-11S users.

5.2.2 **RSX-11S System Generation and Installation Guide (Order No. AA-2874E-TC)** - This manual describes the RSX-11S operating system and explains how to use a host system for generating an RSX-11S operating system. It also describes RSX-11S supplied software and the distribution kit. Error messages are included in an appendix. Before reading this manual, you should be familiar with the introductory manuals in the documentation set and, in particular, with the system generation procedures for the host system.

This manual is intended for use by system programmers and system managers.

5.2.3 **RSX-11S System Generation and Installation Guide Update Notice No. 1 (Order No. AD-2874E-T1)** - This update reflects software changes and additions made in VAX/VMS Version 3.0.

5.3 Host System Manuals

The manuals and reference card included in the following list are shipped with your software. Although they are also shipped with other operating systems, they include important information applicable to RSX-11S. Refer to the preceding sections of this manual and to the prefaces of individual manuals for complete descriptions.

- RSX-11M Mini-Reference. This small manual is a convenient reference for all system users.
- PDP-11 Programming Card. This reference card gives important programming information.

Volume 1: Introduction

- RSX-11M/RSX-11S Information Directory and Master Index. This manual introduces the RSX-11S documentation set.
- RSX-11M/RMS-11/RSX-11S Release Notes. This manual summarizes new software features for RSX-11S Version 4.1 and should be read before the system is generated.

Volume 2: Operation

- RSX-11M System Generation and Installation Guide. RSX-11S SYSGEN Phase I is a subset of RSX-11M SYSGEN Phase I. This manual includes a description of the Phase I questions.
- RSX-11M/M-PLUS MCR Operations Manual. RSX-11S uses a subset of MCR called Basic MCR. This manual gives descriptions of the MCR commands; the RSX-11S System Generation and Installation Guide includes summary descriptions.
- RSX-11M/M-PLUS MCR Operations Manual Update Notice No. 1. This update corrects errors in the manual and documents new features and devices.

Volume 3: Program Development

- RSX-11M/M-PLUS Guide to Program Development. This manual is a step-by-step guide to program development.
- PDP-11 MACRO-11 Language Reference Manual. This manual describes how to use the MACRO-11 Assembler to code MACRO-11 programs.
- IAS/RSX-11 I/O Operations Reference Manual. RSX-11S uses a subset of FCS and its macro calls. This manual fully describes FCS.
- IAS/RSX-11 System Library Routines Reference Manual. This manual describes the system library routines available for inclusion in programs written in MACRO-11 assembly language.
- IAS/RSX-11 ODT Reference Manual. This manual describes how to use the On-Line Debugging Tool to debug programs.

- RSX-11M/M-PLUS Task Builder Manual. This manual describes the concepts and capabilities of the Task Builder.

- RSX-11M/M-PLUS Executive Reference Manual. This manual describes the Executive services available for user tasks.

Volume 4: I/O Drivers Development and Reference

- RSX-11M Guide to Writing an I/O Driver. This guide is an aid in writing an I/O driver.

- RSX-11M/M-PLUS I/O Drivers Reference Manual. This manual describes the functions of all DIGITAL-supplied I/O drivers.

- RSX-11M/M-PLUS I/O Drivers Reference Manual Update Notice No. 1. The update corrects errors in the manual and includes new device support.

Volume 5: System Management and Maintenance

- RSX-11M/M-PLUS System Management Guide. This manual includes a description of VMR, which is used during RSX-11S system generation and installation.

- RSX-11M/M-PLUS System Management Guide Update Notice No. 1. This update corrects errors in the manual and documents new features and devices.

- RSX-11M/M-PLUS Crash Dump Analyzer Reference Manual. This manual tells you how to use the Crash Dump Analyzer to determine the causes of system crashes.

6.0 INTRODUCTION TO THE MASTER INDEX

The Master Index is a large and comprehensive index to the entire documentation set. The indexes of the individual manuals have been compiled into the Master Index without abridgement.

The Master Index will be valuable to new users who are not sure which manual contains the information they need. It will continue to be valuable as an index to topics that are discussed (or might logically be discussed) in more than one manual.

6.1 Format of the Master Index

Each page of the Master Index has two columns. Look in the first column for your topic. When you find it, look across to the second column for the manual(s) and page number(s).

The titles of the manuals are shortened in the Master Index. For example, the long title RSX-11M/M-PLUS Batch and Queue Operations Manual is shortened to "Batch and Queue." See Section 6.2 for a list of the shortened titles.

Here is an example of the way a topic discussed in two or more manuals appears in the Master Index:

```
Despooler,
  definition,          Batch and Queue, Gloss-3
  error message,       System Management, A-2
```

This entry indicates that you will find the definition for "despooler" in the RSX-11M/M-PLUS Batch and Queue Operations Manual's Glossary on page 3. In the RSX-11M/M-PLUS System Management Guide, you can find a discussion of the despooler error messages on page 2 of Appendix A.

Most Master Index entries refer to a single manual only.

6.2 Manuals Included in the Master Index

Following is a list of all the manuals included in this index. The Index Title column gives the shortened titles that appear in the Master Index, with the full manual titles listed in the Manual Title column.

Index Title	Manual Title
Batch and Queue	RSX-11M/M-PLUS Batch and Queue Operations Manual
Command Language	RSX-11M/M-PLUS Command Language Manual
Crash Dump Analyzer	RSX-11M/M-PLUS Crash Dump Analyzer Reference Manual
EDT Editor	EDT Editor Manual
Error Logging	RSX-11M/M-PLUS Error Logging Manual
Executive	RSX-11M/M-PLUS Executive Reference Manual
Introduction	Introduction to RSX-11M and RSX-11M-PLUS
I/O Drivers	RSX-11M/M-PLUS I/O Drivers Reference Manual
I/O Operations	IAS/RSX-11 I/O Operations Reference Manual
MCR Operations	RSX-11M/M-PLUS MCR Operations Manual
ODT	IAS/RSX-11 ODT Reference Manual
PDP-11 MACRO-11	PDP-11 MACRO-11 Language Reference Manual
Program Development	RSX-11M/M-PLUS Guide to Program Development
Release Notes	RSX-11M/RMS-11/RSX-11S Release Notes
RMS-11 Introduction	RSX-11M/M-PLUS RMS-11: An Introduction
RMS-11 User's Guide	RSX-11M/M-PLUS RMS-11 User's Guide
RMS-11 Utilities	RSX-11M/M-PLUS RMS-11 Utilities

Index Title	Manual Title
RMS-11 Macros	RSX-11M/M-PLUS RMS-11 Macro Programmer's Guide
System Generation (11M)	RSX-11M System Generation and Installation Guide
System Generation (11S)	RSX-11S System Generation and Installation Guide
System Library	IAS/RSX-11 System Library Routines Reference Manual
System Management	RSX-11M/M-PLUS System Management Guide
Task Builder	RSX-11M/M-PLUS Task Builder Manual
Utilities	RSX-11M/M-PLUS Utilities Manual
Writing I/O Driver	RSX-11M Guide to Writing an I/O Driver

A

A error — PDP-11 MACRO-11 3-10, 3-13, 3-16, 5-10, 6-25 to 6-26, 6-28 to 6-29, 6-32 to 6-33, 6-38, 6-40, 6-42, 6-44, 6-47, 6-51, 6-56, 7-12 to 7-14, 7-19
  macro definition — PDP-11 MACRO-11 7-2
  summary — PDP-11 MACRO-11 D-1 to D-3
A register — ODT 2-6, 5-3
a symbol — ODT 2-1 to 2-2
A/D converter — I/O Drivers 14-1
  AD01-D — I/O Drivers 14-1
  AFC11 — I/O Drivers 14-1
  device-specific QIO — I/O Drivers 14-2 to 14-3
  FORTRAN interface — I/O Drivers 14-3 to 14-7
  standard QIO — I/O Drivers 14-2
  status return — I/O Drivers 14-8 to 14-9
AA11-K — I/O Drivers 22-2
AAV11-K — I/O Drivers 22-2
$AB
  predefined syntax element in MML — System Management 12-45
/AB switch
  ZAP utility — Utilities 15-2
/ABAUD keyword
  SET command — MCR Operations 3-171
    VMR — System Management 10-46
Abbreviating
  command — Introduction 1-12, 2-4
Abbreviation
  DCL — Command Language 1-7 to 1-8, 9-1
Abbreviations of line editing
    command — EDT Editor 7-1
ABO command — MCR Operations 3-3
ABODF$ — Crash Dump Analyzer B-3
Abort
  task execution — ODT 1-5
  TKB
    during input — Task Builder 11-4
ABORT command — ODT 1-5; Introduction 1-21, 4-15; Command Language 7-16 to 7-21, 9-2; MCR Operations 3-3
  Basic MCR — System Generation (11S) 2-2
  command line format — MCR Operations 3-3
  error message — MCR Operations 3-4
  example — MCR Operations 3-4
  IOX — System Management 4-23
  keyword
    /PMD — MCR Operations 3-4
ABORT option — Task Builder 11-4
Abort Task directive — Executive 5-8
Aborting
  command — Introduction 1-21
  task — Introduction 4-15
ABRT$ — Executive 5-8
ABS symbolic argument — PDP-11 MACRO-11 6-19, 6-42
Absolute
  address — ODT 2-2
  location — ODT 2-5, 4-4

Absolute address mode — PDP-11 MACRO-11 5-7
  assembled from relative — PDP-11 MACRO-11 6-19
ABSOLUTE argument — PDP-11 MACRO-11 8-8
Absolute binary output,
    controlling — PDP-11 MACRO-11 6-19
Absolute expression — PDP-11 MACRO-11 3-17
Absolute loader — System Generation (11S) 2-17
Absolute program section — PDP-11 MACRO-11 6-42, 6-44 to 6-45

  See also .ASECT directive
Absolute region
  See Region
ABSPAT option — Task Builder 11-5
/AC switch — Task Builder 10-5
Access — RMS-11 Introduction 1-1
  — RMS-11 User's Guide 1-7

  See also Access mode
  See also Shared access
  block — RMS-11 Introduction 4-7
  — RMS-11 User's Guide 1-20, 3-6
  direct — RMS-11 Introduction 2-4
  modes — RMS-11 Introduction 3-11
  random — RMS-11 Introduction 2-4
  — RMS-11 User's Guide 1-7, 1-9
    to indexed files — RMS-11 User's Guide 5-7, 5-9
  requested
    See FAC field in FAB
  sequential — RMS-11 Introduction 2-4 to 2-5
  — RMS-11 User's Guide 1-7 to 1-8
    to indexed files — RMS-11 User's Guide 5-16
  shared — RMS-11 Introduction 2-4, 4-3
    See also Access sharing
    See also SHR field in FAB
  stream — RMS-11 Introduction 4-3
Access code — MCR Operations 2-3
Access control — RMS-11 User's Guide 1-9
Access declaration — RMS-11 User's Guide 2-6
  indexed files — RMS-11 User's Guide 7-1
  read-only — RMS-11 User's Guide 2-6
  read/write — RMS-11 User's Guide 2-6
  relative files — RMS-11 User's Guide 4-6
  sequential files — RMS-11 User's Guide 3-6
/ACCESS keyword
  INI command — MCR Operations 3-77
Access mode — RMS-11 Introduction 3-1, 3-11
  See also Random access
  See also Sequential access
      and file organization — RMS-11 Introduction 3-13
  block — RMS-11 Introduction 3-11 to 3-12, 3-14, 4-7
  — RMS-11 User's Guide 1-20, 3-6
    See also BKT field in RAB
    sequential — RMS-11 Introduction 3-12
    VBN — RMS-11 Introduction 3-12
  FIND operation
    indexed files — RMS-11 User's Guide 7-3
    relative files — RMS-11 User's Guide 4-8
    sequential files — RMS-11 User's Guide 3-7
  GET operation
    indexed files — RMS-11 User's Guide 7-5
    relative files — RMS-11 User's Guide 4-10
    sequential files — RMS-11 User's Guide 3-9
  PUT operation
    indexed files — RMS-11 User's Guide 7-6
    relative files — RMS-11 User's Guide 4-11
    sequential files — RMS-11 User's Guide 3-10
  random

Access mode
  random (Cont.)
    by key — RMS-11 User's Guide 1-12
    by RFA — RMS-11 User's Guide 1-12
    by VBN — RMS-11 User's Guide 1-20
    to indexed files — RMS-11 Introduction 3-15
    to relative files — RMS-11 Introduction 3-15
    to sequential files — RMS-11 Introduction 3-14
  record — RMS-11 Introduction 3-11, 3-13, 4-5
    RMS-11 User's Guide 1-12
    See also RAC field in RAB
    FIND operations — RMS-11 Introduction 4-6
    GET operations — RMS-11 Introduction 4-6
    key — RMS-11 Introduction 3-12
    PUT operations — RMS-11 Introduction 4-6
    RFA — RMS-11 Introduction 3-11
    sequential — RMS-11 Introduction 3-11
  sequential
    blocks — RMS-11 User's Guide 1-20
    records — RMS-11 User's Guide 1-12
    to indexed files — RMS-11 Introduction 3-14
    to relative files — RMS-11 Introduction 3-14
    to sequential files — RMS-11 Introduction 3-14
  switching — RMS-11 Introduction 3-13
Access sharing — RMS-11 Introduction 2-4, 4-3
  See also Shared access
  read — RMS-11 Introduction 3-5 to 3-6
  write — RMS-11 Introduction 3-6
Access stream — RMS-11 User's Guide 1-15
  multiple — RMS-11 User's Guide 2-17
    and shared access — RMS-11 User's Guide 2-9 to 2-10
    indexed files — RMS-11 User's Guide 7-10
    relative files — RMS-11 User's Guide 4-15
    sequential files — RMS-11 User's Guide 3-15
Access-code — Task Builder 2-4 to 2-5
  grouping program section by — Task Builder 10-36
Account — Introduction 1-13, Gloss-1
Account entry
  adding to account file — System Management 2-3
  contents — System Management 2-1
  deleting — System Management 2-7
  entering information in — System Management 2-3
  examining — System Management 2-4
  listing — System Management 2-6
  modifying — System Management 2-5
Account file
  adding entry to — System Management 2-3
  copying — System Management 2-2
  creating — System Management 2-2
  extending — System Management 2-2
  maximum number of entries — System Management 2-2
  protection — System Management 2-2
  sorting — System Management 2-8
Account File Maintenance Program
  See ACNT
$ACHCK routine — Writing I/O Driver 5-2
$ACHKB routine — Writing I/O Driver 5-2
ACNT — Command Language 3-4, 4-2, 5-8, 5-72
  MCR Operations 2-24
  account file
    copying — System Management 2-2
    extending — System Management 2-2
  changing password — System Management 2-2
  copying account file — System Management 2-2
  ESCAPE key — System Management 2-3

ACNT (Cont.)
  example — MCR Operations 2-25
  invoking — System Management 2-1
  option
    Add — System Management 2-3
    create — System Management 2-2
    Delete — System Management 2-7
    Examine — System Management 2-4
    Exit — System Management 2-8
    List — System Management 2-6
    Modify — System Management 2-5
    Sort — System Management 2-8
  protection
    restoring — System Management 2-2
ACP — Writing I/O Driver D-1; Command Language 5-26, 5-28 to 5-42, 6-67
  ANSI magtape — System Generation (11M) 4-26
  as extension of Executive — Writing I/O Driver D-5
  as task — Writing I/O Driver D-4
  attributes — Writing I/O Driver D-4
  default — MCR Operations 3-114
  definition — System Generation (11M) 1-4
  enabling and disabling capacity — Writing I/O Driver D-5
  example — Writing I/O Driver D-11
  for class of devices — Writing I/O Driver D-4
  foreign
    passing parameter — MCR Operations 3-123
  I/O function mask — Writing I/O Driver 4-12
  I/O request flow — Writing I/O Driver D-5
  processing — Writing I/O Driver D-6
  QIO interface — I/O Drivers C-1
  role of
    in I/O processing — Writing I/O Driver 2-3
  shareability — Writing I/O Driver D-5
  specifying — MCR Operations 3-118
  specifying APR — Task Builder 10-5
  specifying task as — Task Builder 10-5
  type — Writing I/O Driver D-2 to D-3
/ACP keyword
  MOUNT command — MCR Operations 3-118
Acronym — Introduction Gloss-1
ACS command — MCR Operations 3-8
  command line format — MCR Operations 3-8
  error message — MCR Operations 3-9
  example — MCR Operations 3-9
  keyword
    /BLKS — MCR Operations 3-8
/ACT — Crash Dump Analyzer 2-1
ACT command — MCR Operations 3-11
  MCR — Command Language 3-2
ACTFIL command — I/O Operations 2-41
ACTFIL option — Task Builder 11-6
Action routine — I/O Operations 7-6
ACTION statement — Error Logging 5-30
ACTIVE command — MCR Operations 3-11
  command line format — MCR Operations 3-11
  example — MCR Operations 3-11
  keyword
    /ALL — MCR Operations 3-11
    /TERM — MCR Operations 3-11
Active job
  definition — Batch and Queue Gloss-1
Active Page Register
  See APR

Active task — Introduction 1-20 to 1-21, 4-13, 5-7, Gloss-2, Gloss-33; Command Language 7-1, 7-55 to 7-57
  AST queue — Crash Dump Analyzer 3-23
  attribute bits — Crash Dump Analyzer 3-22
  blocking bits — Crash Dump Analyzer 3-21
  MCR — Crash Dump Analyzer 3-26
  offspring control block — Crash Dump Analyzer 3-24
  receive by reference queue — Crash Dump Analyzer 3-24
  receive queue — Crash Dump Analyzer 3-23
  state bits — Crash Dump Analyzer 3-22
Active task dump — Crash Dump Analyzer 3-21
  AST queue — Crash Dump Analyzer 3-21
  offspring control block — Crash Dump Analyzer 3-21
  receive by reference queue — Crash Dump Analyzer 3-21
  receive queue — Crash Dump Analyzer 3-21
Active Task List
  See ATL
ACTIVE TASK LIST command — MCR Operations 3-19
Activity report
  IOX — System Management 4-19 to 4-21, 4-41
AD01-D — I/O Drivers 14-1
AD11-K — I/O Drivers 22-2
ADD & PRINT command
  EDI editor — Utilities 2-12, 2-28
ADD command
  EDI editor — Utilities 2-11, 2-27
Add option
  ACNT — System Management 2-3 to 2-4
Adding commands
  DCL — System Management 12-9 to 12-11
Addition operator — PDP-11 MACRO-11 3-2, 3-5
Address
  See also RFA
  assigning — Task Builder 2-1
  concepts — Task Builder 2-13
  logical — Task Builder 2-14
  mapped system — Task Builder 2-18
  physical — Task Builder 2-13
    mapped system — Task Builder 2-17
  record — RMS-11 User's Guide 1-9
  relocatable — Introduction 4-6, 4-9, Gloss-28
  space — Task Builder 2-14
    virtual — Task Builder 2-14
    virtual and logical coincidence — Task Builder 2-15
  space translation — Task Builder 2-23
  transfer — Task Builder A-5
  virtual — Task Builder 2-13
    mapped system — Task Builder 2-17 to 2-18
  virtual and logical relationship — Task Builder 2-17, 2-21
  virtual space
    co-tree and main tree — Task Builder 3-39
    disk-resident overlay — Task Builder 3-1 to 3-4
    division — Task Builder 2-18
    division by memory management — Task Builder 2-18
    in overlay tree — Task Builder 3-23
    memory-resident overlay — Task Builder 3-6
    overlaid task — Task Builder 3-10, 3-14
    overlay — Task Builder 3-5, 3-32 to 3-34
    reducing usage of — Task Builder 3-1
  virtual space allocation diagram
    creating ODL file — Task Builder 3-35

Address (Cont.)
  virtual space and memory
    overlaid task — Task Builder 3-11 to 3-14
Address boundary
  See ZAP utility
Address checking — System Generation (11M) 4-25
Address doubleword — Writing I/O Driver A-1
Address expression
  See Expression
Address mapping — Executive 3-2
Address mode — PDP-11 MACRO-11 5-1 to 5-10
  absolute — PDP-11 MACRO-11 5-7
  autodecrement — PDP-11 MACRO-11 5-5
  autodecrement deferred — PDP-11 MACRO-11 5-5
  autoincrement — PDP-11 MACRO-11 5-3
  autoincrement deferred — PDP-11 MACRO-11 5-4
  immediate — PDP-11 MACRO-11 5-6 to 5-7
  index — PDP-11 MACRO-11 5-5
  index deferred — PDP-11 MACRO-11 5-6
  register — PDP-11 MACRO-11 5-2
  register deferred — PDP-11 MACRO-11 5-3
  relative — PDP-11 MACRO-11 5-8
  relative deferred — PDP-11 MACRO-11 5-9
  summary — PDP-11 MACRO-11 B-2
Address space
  logical — Executive 3-2 to 3-3
  MSCP disks
    relevant to RCT — System Management 5-2
  physical — Executive 3-2
  virtual — Executive 3-2 to 3-3
Address window
  virtual — Executive 3-2
Addressing — Introduction 5-3, Gloss-3
  PDP-11 — Executive 3-1
/ADV — Crash Dump Analyzer 2-1
ADV command — EDT Editor 2-43, 8-5
ADV11-K — I/O Drivers 22-2
ADVANCE function — EDT Editor 2-8, 5-15
/AF job switch
  QUE /MOD command — Batch and Queue 2-20
/AF switch
  PRI command — Batch and Queue 2-6
AFC11 — I/O Drivers 14-1
/AFTER job qualifier
  SET QUEUE command — Batch and Queue 2-20
/AFTER qualifier
  PRINT command — Batch and Queue 2-6
AID field in ALL block — RMS-11 Macros 2-12
  CLOSE operation — RMS-11 Macros 5-3
  CREATE operation — RMS-11 Macros 5-9, 5-16
  DISPLAY operation — RMS-11 Macros 5-30
  ENTER operation — RMS-11 Macros 5-35
  ERASE operation — RMS-11 Macros 5-40
  EXTEND operation — RMS-11 Macros 5-46 to 5-47
  offset — RMS-11 Macros 6-2
  OPEN operation — RMS-11 Macros 5-73
  PARSE operation — RMS-11 Macros 5-86
  REMOVE operation — RMS-11 Macros 5-102
  RENAME operation — RMS-11 Macros 5-108
  SEARCH operation — RMS-11 Macros 5-116
  summary — RMS-11 Macros 6-3
/AL switch — Task Builder 10-6
$ALBLK (Allocate block) — System Library 8-9
$$ALER
  reserved PSECT name — Task Builder E-2
ALERR module — Task Builder 5-53

$ALF
  predefined syntax element in
    MML — System Management 12-40
$ALFN
  predefined syntax element in
    MML — System Management 12-40
Alignment
  See also ALN field in ALL block
  RMSDEF utility — RMS-11 Utilities A-14
$ALL
  predefined syntax element in
    MML — System Management 12-43
/ALL — Crash Dump Analyzer 2-1
ALL
  range specification — EDT Editor 6-11
ALL block — RMS-11 Introduction 4-8
  chaining to FAB — RMS-11 Macros 2-12
  declaring — RMS-11 Macros 2-8
  initializing — RMS-11 Macros 2-9
  summary — RMS-11 Macros 6-2
ALL command — MCR Operations 3-12
/ALL keyword
  ACTIVE command — MCR Operations 3-11
/ALLOC keyword
  UFD command — MCR Operations 3-219
ALLOCATE CHECKPOINT SPACE command — MCR Operations 3-8
ALLOCATE command — Introduction 3-12; Command Language 5-4, 5-9, 5-22 to 5-24, 9-2; MCR Operations 3-12
  command line format — MCR Operations 3-12
  error message — MCR Operations 3-13
  example — MCR Operations 3-13
  keyword
    /TERM — MCR Operations 3-12
    /TYPE — MCR Operations 3-12
/ALLOCATE switch
  BAD utility — Utilities 6-5
ALLOCATION
  RMSDES utility
    area section — RMS-11 Utilities 2-44
    file section — RMS-11 Utilities 2-31
Allocation — RMS-11 User's Guide 1-19
  See also ALQ field in ALL block
  See also ALQ field in FAB
  generic — MCR Operations 3-12
  indexed files — RMS-11 User's Guide 6-22
    DEQ — RMS-11 User's Guide 6-26
    initial — RMS-11 User's Guide 6-22
  relative files — RMS-11 User's Guide 4-3
    DEQ — RMS-11 User's Guide 4-4
    initial — RMS-11 User's Guide 4-3
  RMSDEF utility
    data — RMS-11 Utilities A-16
    file — RMS-11 Utilities A-14
  RMSDES utility
    areas — RMS-11 Utilities 2-10, 2-25
  RMSDSP utility
    displaying — RMS-11 Utilities 5-4
  sequential files — RMS-11 User's Guide 3-4
    DEQ — RMS-11 User's Guide 3-4
    initial — RMS-11 User's Guide 3-4
  XAB
    See also ALL block
Allocation failure
  pool — System Management 13-2
Allocation-code — Task Builder 2-4 to 2-5

ALN field in ALL block
  CREATE operation — RMS-11 Macros 5-17
  DISPLAY operation — RMS-11 Macros 5-30
  EXTEND operation — RMS-11 Macros 5-47
  offset — RMS-11 Macros 6-2
  OPEN operation — RMS-11 Macros 5-79
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-4
$ALOCB routine — Writing I/O Driver 5-3
<ALPHAN> symbol — MCR Operations 4-8
ALQ field in ALL block
  CREATE operation — RMS-11 Macros 5-16, 5-21
  DISPLAY operation — RMS-11 Macros 5-30
  EXTEND operation — RMS-11 Macros 5-47
  offset — RMS-11 Macros 6-2
  OPEN operation — RMS-11 Macros 5-79
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-5
ALQ field in FAB
  CREATE operation — RMS-11 Macros 5-16, 5-21
  EXTEND operation — RMS-11 Macros 5-46 to 5-47
  offset — RMS-11 Macros 6-22
  OPEN operation — RMS-11 Macros 5-78
  summary — RMS-11 Macros 6-25
ALQ0 field in ALL block
  offset — RMS-11 Macros 6-2
ALQ1 field in ALL block
  offset — RMS-11 Macros 6-2
ALSCT FORTRAN subroutine — Task Builder 5-56 to 5-58
$ALSVB (Allocate small virtual block) — System Library 8-18
ALT command — MCR Operations 3-15
ALT MODE key — Command Language 3-12
ALTER command — MCR Operations 3-15
  command line format — MCR Operations 3-15
  example — MCR Operations 3-15
  keyword
    /PRI — MCR Operations 3-15
    /RPRI — MCR Operations 3-15
  VMR — System Management 10-8
Alter Priority directive — Executive 5-10
Altering
  contents of location — ODT 4-1
Alternate CLI — System Management 12-2
Alternate CLI support
  UCB field — Writing I/O Driver 4-25
Alternate index
  See also Index
  RMSIFL utility — RMS-11 Utilities 3-11 to 3-12
Alternate key — RMS-11 Introduction 3-7; RMS-11 User's Guide 1-7, 1-11
  RMSDEF utility
    defining — RMS-11 Utilities A-11
  RMSIFL utility
    allocating file space — RMS-11 Utilities 3-13
    sorting — RMS-11 Utilities 3-11
Alternate key files (RMSIFL)
  device allocation — RMS-11 Utilities 3-7
<ALTMOD> symbol — MCR Operations 4-8
ALTP$ — Executive 5-10
ALUN$ — Executive 5-12
$$ALVC
  reserved PSECT name — Task Builder E-2
$$ALVD
  reserved PSECT name — Task Builder E-2
$$ALVI
  reserved PSECT name — Task Builder E-2

$ALVRT (Allocate virtual memory) — System Library 8-16
AM11-K — I/O Drivers 22-2
AMA symbolic argument — PDP-11 MACRO-11 6-19
American National Standards Institute
  See ANSI
Analog-to-digital converter
  See A/D converter
Analysis routines switch — Crash Dump Analyzer 2-3
Ancillary Control Processor
  See ACP
AND
  range specification — EDT Editor 6-11
AND macro
  MML — System Management 12-25 to 12-26
Angle bracket — Command Language 3-15
ANSI
  file specification
    quotation marks in — MCR Operations 1-2
ANSI file name
  DCL — Command Language 1-10
ANSI file name block format — I/O Operations B-5
ANSI magtape — I/O Operations 5-4, G-1, G-10; Command Language 5-12; RMS-11 Macros 3-2, 5-20, 5-37, 5-43, 5-77, 5-88, 5-104, 5-111, 5-118
  creating volume — I/O Operations G-11
  end-of-tape — I/O Operations G-9
  end-of-volume label — I/O Operations G-7
  file header block — I/O Operations G-9
  file header format — I/O Operations G-5 to G-6
  file header labels — I/O Operations G-3 to G-4
  file name conversion — I/O Operations G-6
  file structure — I/O Operations G-8
  file trailer labels — I/O Operations G-7
  FNB offset definitions — I/O Operations B-4
  opening file by file ID — I/O Operations 3-14
  override block size — I/O Operations 2-18
  rewinding file — I/O Operations 4-18
  RMSBCK utility — RMS-11 Utilities 6-1, 6-8
  RMSDSP utility — RMS-11 Utilities 5-3
  set default block size — I/O Operations G-10
  user file labels — I/O Operations G-8
  user volume labels — I/O Operations G-3
  volume label format — I/O Operations G-1 to G-4
ANSI magtape file name — I/O Operations 6-13
  conversion to RADIX-50 — I/O Operations 4-15
  dataset descriptor — I/O Operations 2-29
  .FIND operation on — I/O Operations 4-15
  .PARSE — I/O Operations 4-8
  restriction on NMBLK$ — I/O Operations 2-33
ANSLIB.OLB — System Generation (11M) 4-56
  linking tasks to — System Generation (11M) 7-4
  rebuilding user-written tasks — System Generation (11M) 6-7
ANSLIB.OLB (ANSI Magnetic Tape library) — Program Development 1-11
AOP field in ALL block
  CREATE operation — RMS-11 Macros 5-17 to 5-18
  DISPLAY operation — RMS-11 Macros 5-30
  EXTEND operation — RMS-11 Macros 5-47
  offset — RMS-11 Macros 6-2

AOP field in ALL block (Cont.)
  OPEN operation — RMS-11 Macros 5-79
  RSTS/E — RMS-11 Macros D-4
  summary
    XB$CTG mask — RMS-11 Macros 6-6
    XB$HRD mask — RMS-11 Macros 6-7
AP command
  EDI editor — Program Development 2-17
    Utilities 2-12, 2-28
/AP switch — Error Logging 2-3, 2-8
  PIP utility — Utilities 3-14
  RMSCNV utility — RMS-11 Utilities 4-5, 4-7, 4-13, 4-15
Apostrophe (') operator — ODT 2-7, 4-6
APPEND command — EDT Editor 8-5
    Command Language 4-61 to 4-63, 9-2
APPEND function — EDT Editor 5-38 to 5-40
/APPEND qualifier
  BRU utility — Utilities 7-12
/APPEND switch
  DSC utility — Utilities 8-9
Append switch — Error Logging 2-3, 2-8
  Delete subswitch — Error Logging 2-3, 2-8
Application — RMS-11 User's Guide 1-13
  See also Designing applications
  optimization — RMS-11 User's Guide 2-11
Application task — Introduction 5-2, Gloss-3
Applications Processor
  definition — Batch and Queue Gloss-1
  See also QMG
    special applications
APR — Task Builder 2-16
    RMS-11 User's Guide 8-3
  and memory-resident overlays — RMS-11 User's Guide 8-6
  relocatable region
    specifying for — Task Builder 5-6
  resident common
    system-owned — Task Builder 11-11
  resident library
    system-owned — Task Builder 11-11
  specifying for ACP — Task Builder 10-5
  supervisor mode — RMS-11 User's Guide 8-7
AR11 — I/O Drivers 16-1 to 16-2
Architecture
  control file module — Error Logging 4-1
  error log control file — Error Logging 4-1
Area — RMS-11 User's Guide 6-10, 8-13
  See also ALL block
  alignment
    See ALN field in ALL block
  allocation
    See ALQ field in ALL block
  bucket size
    See BKZ field in ALL block
  contiguity — RMS-11 User's Guide 6-13
    See also XB$CTG mask in AOP field
  count
    See NOA field in SUM block
  default extension size
    See DEQ field in ALL block
  definition — RMS-11 User's Guide 5-2
  description, obtaining
    See DISPLAY operation
  extending allocation
    See EXTEND operation
  identifier

Area
  identifier (Cont.)
    See AID field in ALL block
  location
    See LOC field in ALL block
  multiarea indexed files — RMS-11 User's Guide 6-12
  RMSDEF utility
    defining — RMS-11 Utilities A-13
  RMSDES utility — RMS-11 Utilities 2-10, 2-25
    defining — RMS-11 Utilities 2-1, 2-42
      and BUCKET_SIZE attribute — RMS-11 Utilities 2-32
      and DATA_AREA attribute — RMS-11 Utilities 2-40
      and INDEX_AREA attribute — RMS-11 Utilities 2-41
      and LEVEL1_INDEX_AREA — RMS-11 Utilities 2-41
      and SIZE attribute — RMS-11 Utilities 2-36
      by default — RMS-11 Utilities 2-43
      explicitly — RMS-11 Utilities 2-43
    defining by default — RMS-11 Utilities 2-17, 2-38
      CREATE command — RMS-11 Utilities 2-8, 2-28
      SET ALL command — RMS-11 Utilities 2-14
    defining explicitly — RMS-11 Utilities 2-17
    numbering — RMS-11 Utilities 2-8, 2-28, 2-43
  single-area indexed files — RMS-11 User's Guide 6-11
Area information (RMSDSP)
  displaying — RMS-11 Utilities 5-4
Area number (RMSDEF) — RMS-11 Utilities A-16
Argument
  macro call — PDP-11 MACRO-11 7-4 to 7-5
  macro definition — PDP-11 MACRO-11 7-4 to 7-6
    dummy — PDP-11 MACRO-11 7-2
  passing in macro definition — PDP-11 MACRO-11 7-7
  register — ODT 2-6, 5-3
  separator — ODT 2-5
Arithmetic element
  extended
    specifying — Task Builder 10-16
Arithmetic operator
  See Operator
Array declaration
  mapped — Task Builder A-10
Arrow key — EDT Editor 2-10, 5-13
  See Cursor-control key
/AS switch
  DMP utility — Utilities 11-3
ASC command — EDT Editor 8-5
ASCII — Introduction 4-4, 4-6, 4-8, Gloss-3
  displaying — ODT 4-6
  operator — ODT 2-7
ASCII character — EDT Editor 5-20, 8-5, B-1
ASCII character set — PDP-11 MACRO-11 A-1 to A-3
ASCII conversion
  See ASCII number conversion
ASCII conversion characters — PDP-11 MACRO-11 6-25 to 6-26
.ASCII directive — PDP-11 MACRO-11 6-26 to 6-28
ASCII number conversion
  ASCII to Radix-50 ($CAT5) — System Library 4-6
  ASCII with blanks to Radix-50 ($CAT5B) — System Library 4-8
  decimal to binary ($CDTB) — System Library 4-4
  decimal to binary double-word (.DD2CT) — System Library 4-1
  octal to binary ($COTB) — System Library 4-5
  octal to binary double-word (.OD2CT) — System Library 4-2
ASCII stream file
  RMSCNV utility — RMS-11 Utilities 4-3, 4-8

ASCII stream file (Cont.)
  RMSIFL utility RMS-11 Utilities 3-1
.ASCIZ directive PDP-11 MACRO-11 6-28
.ASCPP I/O Operations 4-7
.ASECT directive PDP-11 MACRO-11 3-11, 6-46
ASG directive
  task builder I/O Operations 6-13
ASG option Task Builder 11-7
.ASK directive MCR Operations 4-23
  example MCR Operations 4-24
  format MCR Operations 4-23
.ASKN directive MCR Operations 4-24
  example MCR Operations 4-26
  format MCR Operations 4-24
.ASKS directive MCR Operations 4-26
  example MCR Operations 4-27
  format MCR Operations 4-27
.ASLUN I/O Operations 4-12
ASN command MCR Operations 3-16
  VMR System Management 10-9
ASR-33 I/O Drivers 2-3, 3-2
ASR-35 I/O Drivers 2-3, 3-2
Assemble Command Language 6-1
Assembler
  See also MACRO-11 Assembly Language
  address mode summary PDP-11 MACRO-11 B-2
  character set PDP-11 MACRO-11 3-1 to 3-3
  coding standard PDP-11 MACRO-11 E-1 to E-16
  directive summary PDP-11 MACRO-11 B-3 to B-8
  directive, general PDP-11 MACRO-11 6-1 to 6-3
    summary table PDP-11 MACRO-11 6-1 to 6-3
  error
    See A error
  error code summary PDP-11 MACRO-11 D-1 to D-5
  error message PDP-11 MACRO-11 8-19 to 8-21
  file specification PDP-11 MACRO-11 8-3 to 8-5
    switch PDP-11 MACRO-11 8-6
  listing symbols PDP-11 MACRO-11 4-1
  MACRO-11 Command Language 6-2 to 6-11
  obsolete functions PDP-11 MACRO-11 I-1
  operating hints PDP-11 MACRO-11 F-1
  operating procedures PDP-11 MACRO-11 8-1
  pass 1 PDP-11 MACRO-11 1-1 to 1-2
  pass 2 PDP-11 MACRO-11 1-2
  position independent code PDP-11 MACRO-11 G-1
  special character summary PDP-11 MACRO-11 B-1
  statement format PDP-11 MACRO-11 2-1
  version number PDP-11 MACRO-11 6-4
  work file PDP-11 MACRO-11 F-1
Assembly RMS-11 Macros 2-20
  language Program Development 1-4 to 1-5
    See also MACRO-11
  listing
    examining at a terminal Program Development 3-6
    formatting Program Development 2-6
    generating Program Development 3-4 to 3-6
    page break Program Development 2-6
    printing Program Development 3-8 to 3-9
    spooling Program Development 3-8 to 3-9
    table of contents Program Development 2-6
    terminal format Program Development 2-6

ASSIGN command — Command Language 4-77 to 4-78, 5-7 to 5-8, 5-13 to 5-15, 5-72 to 5-73, 9-3; MCR Operations 3-16
  command line format
    nonprivileged — MCR Operations 3-17
    privileged — MCR Operations 3-17
  error message — MCR Operations 3-18
  example — MCR Operations 3-18
  keyword
    /GBL — MCR Operations 3-17
    /LOGIN — MCR Operations 3-17
    /TERM — MCR Operations 3-17
  VMR — System Management 10-9
    command line format — System Management 10-9
    example — System Management 10-10
    keyword
      /GBL — System Management 10-9
Assign Logical Unit Number — I/O Operations 4-12
Assign LUN
Assign LUN directive — Executive 5-12
Assign table dump — Crash Dump Analyzer 3-1, 3-17
ASSIGN/LOGIN command — Command Language 5-8
ASSIGN/QUEUE command — Command Language 9-3
  DCL — System Management 7-8, 7-12, 7-22
ASSIGN/REDIRECT command — Command Language 5-16 to 5-18, 9-3
ASSIGN/TASK command — Command Language 5-7, 5-18 to 5-19, 9-4

Assignment
  global — MCR Operations 2-12
  local — MCR Operations 2-12
  logical device — System Management 10-9
  logical unit number
    changing — MCR Operations 3-143; System Management 10-32
    displaying — MCR Operations 3-113; System Management 10-29
  logical-device
    deleting — MCR Operations 3-16
    displaying — MCR Operations 3-16
    global — MCR Operations 3-16
    local — MCR Operations 3-16
    login — MCR Operations 3-16
    specifying — MCR Operations 3-16
  login — MCR Operations 2-12
Assignment operator
  See Direct assignment operator
Assignment statement
  See Direct assignment statement
AST — System Generation (11M) 4-28
  block I/O completion — I/O Operations 2-44
  command arrival — Executive 5-145
  definition — Executive 2-4
  exit — Executive 5-184
  floating point processor exception — Executive 5-160
  general characteristics — Executive 2-7
  power recovery — Executive 5-170
  purpose — Executive 2-6
  receive data — Executive 5-182
  receive-by-reference — Executive 5-191
  service routine — Executive 2-7; I/O Drivers 1-11, 1-13
  task's stack format — Executive 2-8 to 2-11
  terminating service — I/O Drivers 1-24
  trap-dependent parameters — Executive 2-8

AST (Cont.)
  unsolicited-input-character — I/O Drivers 3-32 to 3-33
AST recognition — Executive 5-53 to 5-54
AST routine
  FORTRAN callable — Executive 1-8
AST Service Exit directive — Executive 5-14
AST service routine
  restrictions — I/O Operations 2-45
  specifying address — I/O Operations 2-44
Asterisk (*) — ODT 2-5
  Command Language 3-16, 4-6 to 4-8
  See also Autoload indicator
  See also Wildcard
  cross-reference
    of overlaid task — Task Builder 4-13
  cross-reference listing — Task Builder 10-12
  EDI editor — Program Development 2-10
  PIP — Program Development 3-10
  wildcard — MCR Operations 2-6
Asterisk prompt — EDT Editor 2-20, 7-1
ASTX$S — Executive 5-14
  I/O Drivers 1-24
$ASUMR routine — Writing I/O Driver 5-4, B-3
ASYN argument to RAB$B macro — RMS-11 Macros 2-8
  RSTS/E — RMS-11 Macros D-4
Asynchronous operation — RMS-11 Introduction 4-4
  RMS-11 User's Guide 8-2, 8-4, 8-7 to 8-8
  See also RB$ASY mask in ROP field
  I/O techniques — RMS-11 User's Guide 2-17
  indexed files — RMS-11 User's Guide 7-8
  RAB declaration — RMS-11 Macros 2-8
  relative files — RMS-11 User's Guide 4-14
  sequential files — RMS-11 User's Guide 3-14
  waiting for
    See WAIT operation
Asynchronous serial line interface
  DL11 — I/O Drivers 2-40, 3-30
  DL11-E — I/O Drivers 12-2
Asynchronous serial line multiplexer
  DH11 — I/O Drivers 2-40, 3-29
  DHV11 — I/O Drivers 2-40
  DJ11 — I/O Drivers 2-40, 3-30
  DZ11 — I/O Drivers 2-40, 3-30
Asynchronous System Trap
  See AST
Asynchronous transfer — I/O Operations 3-37
At sign (@) — Command Language 3-16
  MCR Operations 4-1
  cross-reference
    of overlaid task — Task Builder 4-13
  cross-reference listing — Task Builder 10-12 to 10-13
  indirect file — Task Builder 1-5
  ODT — Program Development 5-8
At sign (@) command — ODT 2-5, 4-4
AT. — Command Language 1-17
/ATL — Crash Dump Analyzer 2-1
ATL — Command Language 7-46 to 7-50, 7-55 to 7-57

ATL command
  Basic MCR — MCR Operations 3-19
  command line format — System Generation (11S) 2-3
  example — MCR Operations 3-21
ATRG$ — MCR Operations 3-21
Attach mode — Executive 5-16
Attach Region directive — MCR Operations 4-32
Attached terminal — Executive 5-16
Attachment descriptor — Command Language 3-2
Attribute — Executive 3-8
  block spanning — RMS-11 Introduction 3-15, 4-3, 5-1
  bucket size — RMS-11 User's Guide 1-2, 1-18
  contiguity — RMS-11 Utilities 2-1
  DCL syntax element — RMS-11 User's Guide 1-19
  file allocation — RMS-11 User's Guide 1-19
  file organization — System Management 12-25
  file specification — RMS-11 User's Guide 1-19
  in .NAME directive — RMS-11 User's Guide 1-18
    DSK — Task Builder 3-27
    GBL — Task Builder 3-27
    NODSK — Task Builder 3-27
    NOGBL — Task Builder 3-27
  keys — RMS-11 User's Guide 1-19
  medium — RMS-11 User's Guide 1-18
  MRN — RMS-11 User's Guide 1-19
  placement control — RMS-11 User's Guide 1-19
  program section — RMS-11 User's Guide 1-19
    restriction — Task Builder 2-3
  protection — RMS-11 User's Guide 1-18
  record format — RMS-11 User's Guide 1-18
  record size — RMS-11 User's Guide 1-18
  record-output handling — RMS-11 User's Guide 1-19
  RMSDES utility — RMS-11 Utilities 2-29
    ALLOCATION (area section) — RMS-11 Utilities 2-44
    ALLOCATION (file section) — RMS-11 Utilities 2-31
    BLOCK_SPAN — RMS-11 Utilities 2-37
    BUCKET_SIZE (area section) — RMS-11 Utilities 2-43, 2-45
    BUCKET_SIZE (file section) — RMS-11 Utilities 2-32
    CARRIAGE_CONTROL — RMS-11 Utilities 2-37
    CHANGES — RMS-11 Utilities 2-40
    clearing — RMS-11 Utilities 2-6, 2-22, 2-25
      individual values — RMS-11 Utilities 2-26
      sections — RMS-11 Utilities 2-26
    CLUSTER_SIZE — RMS-11 Utilities 2-31
    CONTIGUOUS (area section) — RMS-11 Utilities 2-46
    CONTIGUOUS (file section) — RMS-11 Utilities 2-35
    CONTROL_FIELD_SIZE — RMS-11 Utilities 2-37
    DATA_AREA — RMS-11 Utilities 2-40
    DATA_FILL — RMS-11 Utilities 2-40
    displaying — RMS-11 Utilities 2-15, 2-26
      individual values — RMS-11 Utilities 2-26
      sections — RMS-11 Utilities 2-27
    DUPLICATES — RMS-11 Utilities 2-40, 2-42, 2-44
    EXACT_POSITIONING — RMS-11 Utilities 2-47
    EXTENSION (area section) — RMS-11 Utilities 2-45
    EXTENSION (file section) — RMS-11 Utilities 2-32
    FILE PLACEMENT (system section) — RMS-11 Utilities 2-30
    FORMAT — RMS-11 Utilities 2-36
    INDEX_AREA — RMS-11 Utilities 2-41
    INDEX_FILL — RMS-11 Utilities 2-41
    informational — RMS-11 Utilities 2-1, 2-17, 2-29
    LEVEL1_INDEX_AREA — RMS-11 Utilities 2-41
    MAGTAPE_BLOCK_SIZE — RMS-11 Utilities 2-34

Attribute
  RMSDES utility (Cont.)
    MAX_RECORD_NUMBER — RMS-11 Utilities 2-34
    NAME (file section) — RMS-11 Utilities 2-31
    NAME (key section) — RMS-11 Utilities 2-38
    NULL_KEY — RMS-11 Utilities 2-39
    NULL_VALUE — RMS-11 Utilities 2-39
    ORGANIZATION — RMS-11 Utilities 2-31
    OWNER — RMS-11 Utilities 2-34
    POSITION — RMS-11 Utilities 2-46
    PROTECTION — RMS-11 Utilities 2-33
    resetting — RMS-11 Utilities 2-21
    REWIND_MAGTAPE — RMS-11 Utilities 2-34
    RMS-11 — RMS-11 Utilities 2-1, 2-17, 2-29
    SEG0_POSITION — RMS-11 Utilities 2-42
    SEGn_LENGTH — RMS-11 Utilities 2-42
    SEGn_POSITION — RMS-11 Utilities 2-42
    setting — RMS-11 Utilities 2-13
      from a data file — RMS-11 Utilities 2-25
      from a description file — RMS-11 Utilities 2-24
      individual values — RMS-11 Utilities 2-21
    setting sections — RMS-11 Utilities 2-21
    SIZE — RMS-11 Utilities 2-36
    SOURCE — RMS-11 Utilities 2-30
    SUPERSEDE — RMS-11 Utilities 2-35
    TARGET — RMS-11 Utilities 2-30
    TYPE — RMS-11 Utilities 2-38
  RMSDSP utility — RMS-11 Utilities 5-1
  save — Task Builder 2-4
/AU switch
  SLP utility — Utilities 13-15
Audit trail
  See SLP utility
$$AUTO
  PSECT — Task Builder 5-52 to 5-53
  reserved PSECT name — Task Builder E-2
AUTO module — Task Builder 5-52
Autobaud detection option — MCR Operations 3-171; System Management 10-46
Autobaud speed detection — I/O Drivers 2-42
Autoconfigure — System Generation (11M) 1-2
  adding devices — System Generation (11M) 4-4
  description — System Generation (11M) 3-16
  device support — System Generation (11M) E-1
  failure — System Generation (11M) 3-17
  overriding results — System Generation (11M) 3-18, 4-3
    exception — System Generation (11M) 3-19
  question — System Generation (11M) 4-3
  restrictions — System Generation (11M) 3-16
  sample output — System Generation (11M) 3-17
  supported hardware — System Generation (11M) 3-19
  use — System Generation (11M) 3-16
  with saved answer files — System Generation (11M) 3-17
Autodecrement address mode — PDP-11 MACRO-11 5-5
Autodecrement deferred address mode — PDP-11 MACRO-11 5-5
Autodecrement indicator — PDP-11 MACRO-11 3-2
Autoincrement address mode — PDP-11 MACRO-11 5-3
Autoincrement deferred address mode — PDP-11 MACRO-11 5-4
Autoincrement indicator — PDP-11 MACRO-11 3-2
AUTOL module — Task Builder 5-52
Autoload — Task Builder 4-1
  applying indicator
    co-tree root — Task Builder 4-2
    .FCTR label name — Task Builder 4-3
    file name — Task Builder 4-2

Autoload
  applying indicator (Cont.)
    portions of ODL tree — Task Builder 4-2
    program section name — Task Builder 4-3
    segment name — Task Builder 4-3
  code sequence
    conventional task — Task Builder 4-5
  error handling — Task Builder 4-11 to 4-12
  indicator — Task Builder 4-2
    efficiently placed — Task Builder 4-6
  overhead in region — Task Builder 5-13
  path loading — Task Builder 4-3 to 4-4
  specifying — Task Builder 4-1
  vector — Task Builder 4-4
    eliminating unnecessary — Task Builder 4-6
    overlay — Task Builder 3-20
  vector format
    conventional task — Task Builder 4-4
    I- and D-space — Task Builder 4-4 to 4-5
Autoloadable
  data segment — Task Builder 4-7
  making file
    using file name — Task Builder 4-2
  making program section — Task Builder 4-3
Automatic carriage return — I/O Drivers 2-34, 3-27 to 3-28
Automatic file truncation — I/O Operations 4-22
  disabling — I/O Operations 4-22
  enabling — I/O Operations 4-22
AUTOMCALL argument — PDP-11 MACRO-11 8-9
AVERAGE.FTN source code — Program Development 7-3

B

B command — ODT 2-8, 3-1 to 3-2
  ODT — Program Development 5-6
B condition test argument — PDP-11 MACRO-11 6-52
B error — PDP-11 MACRO-11 6-37
  summary — PDP-11 MACRO-11 D-3
^B operator — PDP-11 MACRO-11 3-5, 6-32
B register — ODT 2-6, 5-4
$BA
  predefined syntax element in MML — System Management 12-45
/BA switch — Error Logging 2-3, 2-9
  DMP utility — Utilities 11-3
BACK command — EDT Editor 2-43, 8-6
BACK SPACE function — EDT Editor 5-19
BACK SPACE key — Introduction 1-8 to 1-10, Gloss-4
  Command Language 3-13
Back-up date
  RMSRST utility — RMS-11 Utilities 7-8, 7-10
Backing up files — RMS-11 User's Guide 1-10, 1-12
Backing up volume
  See BRU utility
  See DSC utility
Backslash (\)
  ODT — Program Development 5-5
Backslash operator (\) — ODT 2-7, 4-2 to 4-3
Backup and Restore Utility
  See BRU utility
BACKUP command — Command Language 5-11, 5-60 to 5-71, 9-4 to 9-5
BACKUP function — EDT Editor 5-15
Backup switch — Error Logging 2-3, 2-9

/BACKUP_SET qualifier
  BRU utility Utilities 7-13
Backwards deletion option MCR Operations 3-174
  System Management 10-48

Bad block
  detection
    RCT System Management 5-3
  handling on MSCP disks
    RCT System Management 5-3
  information
    DSC utility Utilities 8-9
  listing
    IOX System Management 4-25
  locating
    BAD utility Utilities 6-1
    FMT utility Utilities 5-1
    VFY utility Utilities 9-7
  notification
    RCT System Management 5-3
  processing
    BAD utility Utilities 6-3
    BRU utility Utilities 7-24
  recovery
    RCT System Management 5-1
  removing from testing
    IOX System Management 4-24
  replacement
    RCT System Management 5-1, 5-3
  replacement completion
    RCT System Management 5-4
  revectoring
    RCT System Management 5-4
  specifying
    IOX System Management 4-24
  steps to replace
    RCT System Management 5-3
Bad Block File Header I/O Operations E-2
Bad Block Locator Utility
  See BAD utility
Bad Block Replacement Control
    Task
  See RCT
/BAD keyword
  INI command MCR Operations 3-77
/BAD qualifier
  BRU utility Utilities 7-13, 7-24
  options Utilities 7-25
/BAD switch
  DSC utility Utilities 8-9
  FMT utility Utilities 5-7
BAD utility Command Language 5-10 to 5-12,
    5-64 to 5-65
  bad block descriptor entry Utilities 6-4
  bad block processing Utilities 6-3
  command line Utilities 6-1
  device support Utilities 6-9
  device verifying Utilities 6-3
  error message Utilities 6-10
  indirect command file Utilities 6-2
  INI command Utilities 6-4
  programming consideration Utilities 6-5
  switch Utilities 6-5
    stand-alone Utilities 6-8
    summary Utilities 6-1
    task Utilities 6-5
BADBLK.SYS file Command Language 5-11, 5-65

BADBLOCKS
  display command — System Management 4-25
  IOX command — System Management 4-24
  parameter command — System Management 4-24
Badge reader — I/O Drivers 2-4A, 3-3
BADSYS
  deleted from kits — Release Notes 1-23
Base number — Introduction 3-2
  in DCL — Command Language 1-8
Base-10 — Introduction 3-2
Base-8 — Introduction 3-2
Baseline system
  definition — System Generation (11M) 1-5
BASIC — Introduction 4-12
BASIC command — Introduction 4-13
  Command Language 6-2, 6-11 to 6-13, 9-5
Basic MCR — System Generation (11S) 1-1, 2-1
  ABORT command — System Generation (11S) 2-2
  ATL command — System Generation (11S) 2-3
  BRK command — System Generation (11S) 2-3
  building — System Generation (11S) 4-6
  CANCEL command — System Generation (11S) 2-2
  command
    initialization — System Generation (11S) 2-2
    system maintenance — System Generation (11S) 2-3
    task control — System Generation (11S) 2-2
  error message — System Generation (11S) 2-4
  initiating — System Generation (11S) 2-1
  OPEN command — System Generation (11S) 2-3
  REDIRECT command — System Generation (11S) 2-2
  RESUME command — System Generation (11S) 2-2
  RUN command — System Generation (11S) 2-2
  size — System Generation (11S) 1-3
  TAL command — System Generation (11S) 2-4
  TIME command — System Generation (11S) 2-2
BASIC-11/IAS-RSX — Command Language 6-11 to 6-13, 9-5
BASIC-PLUS-2/IAS-RSX — Command Language 6-11 to 6-13, 9-5
<BASLIN> symbol — MCR Operations 4-8
Batch processing — Executive 4-1
  System Management 7-1, 7-9 to 7-10
Batch processor prototype task — System Management 7-1
Baud rate — EDT Editor C-1
  autobaud detection option — MCR Operations 3-171
  remote terminal
    specifying — MCR Operations 3-193
    System Management 10-57
  specifying — MCR Operations 3-198
  System Management 10-59
BC macro
  MML — System Management 12-26
BCT macro
  MML — System Management 12-27 to 12-28
/BD switch
  RMSRST utility — RMS-11 Utilities 7-8, 7-10
BDB pool — RMS-11 Macros 2-8
BEFORE
  range specification — EDT Editor 6-10
BEGIN
  range specification — EDT Editor 6-8
BEGIN command
  EDI editor — Program Development 2-14
  EDI editor — Utilities 2-28

.BEGIN directive — MCR Operations 4-28
  format — MCR Operations 4-28
Begin-End block — MCR Operations 4-3
  beginning — MCR Operations 4-28
  creating — MCR Operations 4-3
  ending — MCR Operations 4-35
BEGIN-END statement — Error Logging 5-36
BEX symbolic argument — PDP-11 MACRO-11 6-11
/BF switch
  SLP utility — Utilities 13-15
Bias value — ODT 2-3, 5-6
  Trace program — ODT 8-2
BID field in FAB
  offset — RMS-11 Macros 6-22
  summary
    FB$BID code — RMS-11 Macros 6-26
BID field in RAB
  offset — RMS-11 Macros 6-115
  summary
    RB$BID code — RMS-11 Macros 6-116
Big buffer
  choosing size for — I/O Operations 1-8
  using — I/O Operations 1-8
Big buffering — I/O Operations 1-7, 3-21, 3-27
Big disk tape kit
  copying
    on-line — System Generation (11M) 2-32
    stand-alone — System Generation (11M) 2-6
Big-buffering support — System Generation (11M) 4-56
BIN symbolic argument — PDP-11 MACRO-11 6-11
BINARY argument — PDP-11 MACRO-11 8-9, 8-11
Binary conversion
  binary byte to octal ($CBTMG) — System Library 5-9
  binary date to decimal ($CDBAT) — System Library 5-2
  binary to signed decimal ($CBDSG) — System Library 5-4
  binary to signed octal ($CBOSG) — System Library 5-8
  binary to unsigned decimal ($CBDMG) — System Library 5-3
  binary to unsigned octal ($CBOMG) — System Library 5-7
  double-precision binary to decimal ($CDDMG) — System Library 5-5
  general purpose binary to ASCII ($CBTA) — System Library 5-10
Binary key
  See also XB$BN2 mask in DTP field
  See also XB$BN4 mask in DTP field
  2-byte unsigned — RMS-11 User's Guide 6-5
  4-byte unsigned — RMS-11 User's Guide 6-5
Binary machine code — Introduction 4-5 to 4-6, 4-12, Gloss-4
Binary operator — PDP-11 MACRO-11 3-5 to 3-6
  See also Operator, logical
  evaluation of multiple — PDP-11 MACRO-11 3-6
  precedence with unary — PDP-11 MACRO-11 3-16
Binary output
  controlling absolute — PDP-11 MACRO-11 6-19
  enabling and disabling — PDP-11 MACRO-11 6-20
Binary output file size switch — Crash Dump Analyzer 2-8
Bit — RMS-11 Introduction 2-1
8-bit character option — MCR Operations 3-176
BITMAP.SYS file — Command Language 5-11, 5-65
BKS field in FAB
  CREATE operation — RMS-11 Macros 5-17
  offset — RMS-11 Macros 6-24

BKS field in FAB (Cont.)
  OPEN operation RMS-11 Macros 5-78
  RSTS/E RMS-11 Macros D-3
  summary RMS-11 Macros 6-27
BKT field in RAB RMS-11 Macros 4-6, 4-12 to 4-13
  FIND operation RMS-11 Macros 5-50, 5-52, 5-55
  GET operation RMS-11 Macros 5-61, 5-65, 5-68
  offset RMS-11 Macros 6-115
  PUT operation RMS-11 Macros 5-93, 5-96
  READ operation RMS-11 Macros 5-98, 5-100
  SPACE operation RMS-11 Macros 5-120
  summary RMS-11 Macros 6-117
  WRITE operation RMS-11 Macros 5-127, 5-129
BKZ field in ALL block
  CREATE operation RMS-11 Macros 5-17
  DISPLAY operation RMS-11 Macros 5-30
  offset RMS-11 Macros 6-2
  OPEN operation RMS-11 Macros 5-79
  RSTS/E RMS-11 Macros D-3 to D-4
  summary RMS-11 Macros 6-8
/BL Crash Dump Analyzer 2-6
/BL switch
  CMP utility Utilities 12-2
  DMP utility Utilities 11-4
  DSC utility Utilities 8-12
  FLX utility Utilities 4-6
  PIP utility Utilities 3-11
  RMSCNV utility RMS-11 Utilities 4-8
Blank line PDP-11 MACRO-11 2-1
BLDLAINIT.CMD System Generation (11M) 3-5
.BLK
  See Program section
BLK command MCR Operations 3-22
.BLKB directive PDP-11 MACRO-11 6-38
/BLKS keyword
  ACS command MCR Operations 3-8
.BLKW directive PDP-11 MACRO-11 6-38
BLN field in ALL block
  offset RMS-11 Macros 6-2
  summary
    XB$LAL code RMS-11 Macros 6-9
BLN field in DAT block
  offset RMS-11 Macros 6-14
  summary
    XB$DTL code RMS-11 Macros 6-15
BLN field in FAB
  offset RMS-11 Macros 6-22
  summary
    FB$BLN code RMS-11 Macros 6-28
BLN field in KEY block
  offset RMS-11 Macros 6-67
  summary
    XB$KYL code RMS-11 Macros 6-69
BLN field in PRO block
  offset RMS-11 Macros 6-108
  summary
    XB$PRL code RMS-11 Macros 6-109
BLN field in RAB
  offset RMS-11 Macros 6-115
  summary RMS-11 Macros 6-118
BLN field in SUM block
  offset RMS-11 Macros 6-145
  summary
    XB$SML code RMS-11 Macros 6-146

Block — Introduction 3-2, Gloss-5; RMS-11 Introduction 2-3; RMS-11 User's Guide 1-16

See also Control block

access mode — RMS-11 Introduction 3-11 to 3-12, 3-14, 4-7; RMS-11 User's Guide 1-20, 3-6

see also Shared access

See also BKT field in RAB

remote — RMS-11 User's Guide B-3

RMSCNV utility — RMS-11 Utilities 4-1

sequential — RMS-11 Introduction 3-12

VBN — RMS-11 Introduction 3-12

allocating

VFY utility — Utilities 9-8

bad

detection

RCT — System Management 5-3

handling on MSCP disks

RCT — System Management 5-3

listing

IOX — System Management 4-25

notification

RCT — System Management 5-3

recovery

RCT — System Management 5-1

removing from testing

IOX — System Management 4-24

replacement

RCT — System Management 5-1, 5-3

replacement completion

RCT — System Management 5-4

revectoring

RCT — System Management 5-4

specifying

IOX — System Management 4-24

steps to replace

RCT — System Management 5-3

context — RMS-11 Introduction 4-7

readable block — RMS-11 Introduction 4-7

writable block — RMS-11 Introduction 4-7

incomplete replacement checking

RCT — System Management 5-1

label — Task Builder 2-8

locating

See SPACE operation

logical — RMS-11 Introduction 2-3

RCT — System Management 5-2

magnetic tape

user definable — RMS-11 Introduction 2-4

operations — RMS-11 Introduction 4-7

processing — RMS-11 Introduction 4-1, 4-7

reading

See READ operation

recovering lost

VFY utility — Utilities 9-7

replacement

RCT — System Management 5-2

replacement functions listed

RCT — System Management 5-1

size, magtape

See BLS field in FAB

spanning — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-16, 1-19, 3-1

variable-length records — RMS-11 User's Guide 2-16

verifying

Block
  verifying (Cont.)
    VFY utility — Utilities 9-7
  virtual — RMS-11 Introduction 2-3
  writing
    See WRITE operation
Block boundary
  RMSDEF utility — RMS-11 Utilities A-9
Block buffer size — I/O Operations 3-21, 3-27
BLOCK command — MCR Operations 3-22
  command line format — MCR Operations 3-22
  example — MCR Operations 3-22
Block context — RMS-11 Macros 4-12
Block I/O — I/O Operations 3-30, 3-35
Block I/O completion — I/O Operations 2-44, 3-35
Block locking
  enabling — I/O Operations 2-15
Block mode
  EDI editor — Program Development 1-3
Block number switch — Crash Dump Analyzer 2-7
BLOCK ON/OFF command
  EDI editor — Utilities 2-28
Block operation — RMS-11 Macros 4-14
Block operation macro
  declaring — RMS-11 Macros C-3
  $READ — RMS-11 Macros 5-98, 5-100
  $SPACE — RMS-11 Macros 5-120
  $WRITE — RMS-11 Macros 5-127, 5-129
Block processing — RMS-11 Macros 4-11
Block size
  magnetic tape — I/O Drivers 8-14
  parameter to FDBK$A — I/O Operations 2-11
Block stream — RMS-11 Macros 4-11
Block-declaration macro — RMS-11 Macros 2-8 to 2-9
BLOCK_SPAN
  RMSDES utility — RMS-11 Utilities 2-37
Blocked record
  See FB$BLK mask in RAT field
Blocked task — Introduction 5-7, Gloss-5, Gloss-33; Command Language 7-23 to 7-26
BLS field in FAB
  CREATE operation — RMS-11 Macros 5-15
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-79
  summary — RMS-11 Macros 6-29
$BMSET — Error Logging 4-20
$BNUM
  predefined syntax element in MML — System Management 12-40
Boot — Introduction Gloss-5
Boot block
  hardware
    writing on system device — MCR Operations 3-159
BOOT command — MCR Operations 3-23
  command line format — MCR Operations 3-23
  error message — MCR Operations 3-25
  example — MCR Operations 3-25
/BOOT keyword
  SAVE command
    VMR — System Management 10-40
Bootstrap
  hardware — System Generation (11M) 1-5, B-1
  mapped baseline system — System Generation (11M) 4-2
  procedure — System Generation (11M) B-1
  software — System Generation (11M) 1-5

Bootstrap (Cont.)
  summary of addresses — System Generation (11M) B-2
  virgin system — System Generation (11M) 6-2
    nonstandard unmapped — System Generation (11M) 6-13
Bootstrap block — I/O Operations E-1
Bootstrapping
  system
    DB-based — Release Notes 1-34
    DM-based — Release Notes 1-34
    DR-based — Release Notes 1-34
/BOT keyword
  SET command
    VMR — System Management 10-47
BOttom command
  EDI editor — Utilities 2-12, 2-29
BOTTOM function — EDT Editor 2-9, 5-21
/BP switch
  RMSDSP utility — RMS-11 Utilities 5-3 to 5-4
BPA field in FAB — RMS-11 Macros 2-7, 3-5
  CLOSE operation — RMS-11 Macros 5-4
  CREATE operation — RMS-11 Macros 5-13
  ENTER operation — RMS-11 Macros 5-36
  ERASE operation — RMS-11 Macros 5-42
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-74
  PARSE operation — RMS-11 Macros 5-87
  REMOVE operation — RMS-11 Macros 5-104
  RENAME operation — RMS-11 Macros 5-110
  SEARCH operation — RMS-11 Macros 5-117
  summary — RMS-11 Macros 6-30
BPS field in FAB — RMS-11 Macros 2-7, 3-5
  CLOSE operation — RMS-11 Macros 5-4
  CREATE operation — RMS-11 Macros 5-13
  ENTER operation — RMS-11 Macros 5-36
  ERASE operation — RMS-11 Macros 5-42
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-74
  PARSE operation — RMS-11 Macros 5-87
  REMOVE operation — RMS-11 Macros 5-104
  RENAME operation — RMS-11 Macros 5-110
  SEARCH operation — RMS-11 Macros 5-117
  summary — RMS-11 Macros 6-31
/BR switch
  PIP utility — Utilities 3-25
  QUE /LI command — Batch and Queue 2-15
Branch
  location — ODT 2-6, 4-5
  offset — ODT 7-2
Branch instruction, address
    calculation — PDP-11 MACRO-11 5-10
Break-through write — I/O Drivers 2-22
Breakpoint — ODT 3-1 to 3-3, 5-1
  address register — ODT 2-6, 3-2, 5-4
    clear — ODT 3-2
    set — ODT 3-1
  definition — System Generation (11M) 3-8
  EOS — System Generation (11M) 3-8
  EOX — System Generation (11M) 3-9
  instruction — ODT 2-7, 5-4
  proceed count — ODT 2-7, 3-3, 5-4
  purpose — System Generation (11M) 3-8
  removing — ODT 2-8, 3-2
  set — ODT 3-1
  setting in a task — Program Development 5-6
Breakpoint register — Program Development 5-6
BREAKPOINT TO XDT command — MCR Operations 3-26
Brief format report — Error Logging 3-11

/BRIEF qualifier
  SHOW QUEUE command — Batch and Queue 2-15
BRIEF qualifier — EDT Editor 7-17
BRK command — MCR Operations 3-26
  Basic MCR — System Generation (11S) 2-3
  command line format — MCR Operations 3-26
  example — MCR Operations 3-26
BRO command — MCR Operations 3-27
/BRO keyword
  SET command — MCR Operations 3-172
    VMR — System Management 10-48
BROADCAST command — Introduction 6-1
  Command Language 3-29 to 3-31, 9-6
  MCR Operations 3-27
  command line format — MCR Operations 3-27
  display format — MCR Operations 3-29
  error message — MCR Operations 3-30
  example — MCR Operations 3-29
  option
    ALL — MCR Operations 3-28
    LOG — MCR Operations 3-28
Broadcast option — MCR Operations 3-172
  System Management 10-48
BRU utility — Command Language 5-12, 5-60 to 5-71
  See also BACKUP command
  bad block processing — Utilities 7-24
  command line — Utilities 7-5
    parameter — Utilities 7-6
  command qualifier
    description — Utilities 7-12
    function — Utilities 7-11
    summary — Utilities 7-8
  data transfer — Utilities 7-26
  device information — Utilities 7-1
  device support — Utilities 7-5
  disk initialization — Utilities 7-17
  error message — Utilities 7-34
  example — Utilities 7-28
  file creation date — Utilities 7-27
  file revision date — Utilities 7-27
  file treatment — Utilities 7-26
    file header — Utilities 7-27
    file synonyn — Utilities 7-27
    lost file — Utilities 7-27
  restriction
    backup tapes — Release Notes 1-35
  stand-alone — Utilities 7-22
    booting — Utilities 7-23
    CNF and — Utilities 7-22
    locating — Utilities 7-23
  system image copying — Utilities 7-26
  task build — System Generation (11M) 6-3
  using
    backup target system disk — System Generation (11M) 6-9
    recovering disk space — System Generation (11M) 6-3
BRU64K — System Generation (11M) 2-4
  CNF
    altering CSRs using — System Generation (11M) 2-4
    altering vectors using — System Generation (11M) 2-4
  restriction — Release Notes 1-23
/BS keyword
  MOUNT command — MCR Operations 3-119
BS macro
  MML — System Management 12-26

/BS switch
  FLX utility — Utilities 4-6
  PIP utility — Utilities 3-15
BST macro
  MML — System Management 12-27 to 12-28
Bucket — RMS-11 Introduction 4-2
  continuation — RMS-11 User's Guide 5-5
  fill number — RMS-11 Introduction 4-2
    populating indexed files — RMS-11 User's Guide 6-28
  fill number, data
    See DFL field in KEY block
  fill number, honoring
    See RB$LOA mask in ROP field
  fill number, index
    See IFL field in KEY block
  high-key value — RMS-11 User's Guide 5-5 to 5-6
  I/O units — RMS-11 User's Guide 1-16
  index — RMS-11 User's Guide 5-6
  locking — RMS-11 Introduction 4-3
    and shared access — RMS-11 User's Guide 2-8
    FIND operation — RMS-11 User's Guide 2-8
    GET operation — RMS-11 User's Guide 2-8
  relative files — RMS-11 User's Guide 4-1
  RMSCNV utility — RMS-11 Utilities 4-10
  size
    See BKS field in FAB
    See BKZ field in ALL block
Bucket format
  indexed files — RMS-11 User's Guide 5-2
Bucket size — RMS-11 User's Guide 1-19
  calculation
    alternate indexes — RMS-11 User's Guide 6-19
    primary index — RMS-11 User's Guide 6-16
  indexed files — RMS-11 User's Guide 6-15
    prologue — RMS-11 User's Guide 5-2
  relative files — RMS-11 User's Guide 4-2
  RMSDEF utility — RMS-11 Utilities A-15
Bucket splitting — RMS-11 User's Guide 5-11
  RRV — RMS-11 User's Guide 5-12
BUCKET_SIZE
  RMSDES utility
    area section — RMS-11 Utilities 2-43, 2-45
    file section — RMS-11 Utilities 2-32
/BUF keyword
  SET command — MCR Operations 3-173
    VMR — System Management 10-48
Buffer — Introduction Gloss-5
  cache — RMS-11 User's Guide 4-15
  current — EDT Editor 2-35
  EDT — Introduction 2-4, 2-17
  I/O — RMS-11 User's Guide 1-14
    size — RMS-11 User's Guide 2-5
  MAIN — EDT Editor 1-2, 2-1, 6-5
  multiple — EDT Editor 1-8, 2-32
    RMS-11 User's Guide 2-18, 3-14, 4-15
  PASTE — EDT Editor 1-2, 2-1, 6-5
  record
    See RBF field in RAB
  rules for naming — EDT Editor 6-6
  SHOW BUFFER command — EDT Editor 9-15
  special — Writing I/O Driver 6-9
  string search — EDT Editor 5-23
  text — EDT Editor 1-2, 2-1
    Program Development 1-3
  type-ahead — I/O Drivers 2-37

Buffer
  type-ahead (Cont.)
    clearing — MCR Operations 2-18
  user — RMS-11 User's Guide 1-14
    See also UBF field in RAB
Buffer address
  parameter to FDBK$A — I/O Operations 2-11
Buffer format
  for GTIM$ directive — Executive 5-95
  for GTSK$ directive — Executive 5-97
Buffer pool — RMS-11 Macros 3-5
Buffer record
  maximum size — Task Builder 11-23
Buffer space
  statistics
    shown with PARAMETERLIST — System Management 4-42
Buffering
  variable-length — I/O Drivers 3-28
/BUFFERS qualifier
  BRU utility — Utilities 7-14
BUFFERSIZE command
  IOX — System Management 4-26
Build file
  modifying
    to improve performance — Task Builder F-1, F-5
Building tasks — RMS-11 User's Guide 1-13
  See also Task builder
Built-in variables — I/O Operations 7-5
Bundled — Introduction 4-12, Gloss-5
/BY switch
  DMP utility — Utilities 11-5
BYE command — MCR Operations 3-31
  command line format — MCR Operations 3-32
  error message — MCR Operations 3-32
  example — MCR Operations 3-32
  keyword
    /HOLD — MCR Operations 3-31
  task
    aborting
      nonprivileged — MCR Operations 3-31
      privileged — MCR Operations 3-32
Byte — RMS-11 Introduction 2-1
.BYTE directive — PDP-11 MACRO-11 6-23 to 6-24
Byte location
  displaying — ODT 4-2 to 4-6
  opening — ODT 4-2 to 4-6
Byte mode
  operator
    ASCII — ODT 2-7, 4-6
    octal — ODT 2-7, 4-2 to 4-3

C

^C operator — PDP-11 MACRO-11 3-5, 6-35 to 6-36
C register — ODT 2-6, 5-3, 7-3
  indicator — ODT 2-3, 2-8, 7-3
$C5TA (Radix-50 to ASCII) — System Library 5-11
/CA switch
  RMSCNV utility — RMS-11 Utilities 4-8
...CA. — System Management 12-3
Cache — RMS-11 User's Guide 4-15
  indexed files — RMS-11 User's Guide 7-9
Cache corruption
  write-back
    checking by RCT — System Management 5-1
Cache data
  write-back

Cache data
  write-back (Cont.)
    preventing loss of System Management 5-5
Calculated location
  return from ODT 2-6, 4-6
Calculating file work space
  (RMSIFL) RMS-11 Utilities 3-12
Calculation ODT 7-1
  offset ODT 7-1
  relocatable
    address ODT 7-1
CALL
  macro I/O Operations 4-1
Call
  operation routine RMS-11 Macros 2-13
    arguments in memory RMS-11 Macros 2-14
    macro argument RMS-11 Macros 2-13
CALL ABORT Executive 5-8
CALL ALTPRI Executive 5-10
CALL ASNLUN Executive 5-12
CALL ATRG Executive 5-16
CALL CANALL Executive 5-51
CALL CANMT Executive 5-29
CALL CLREF Executive 5-28
CALL CNCT Executive 5-31
CALL CRAW Executive 5-37
CALL CRGF Executive 5-40
CALL CRRG Executive 5-42
CALL DECLAR Executive 5-52
CALL DISCKP Executive 5-55
CALL DSASTR Executive 5-53
CALL DTRG Executive 5-56
CALL ELAW Executive 5-58
CALL ELGF Executive 5-60
CALL EMST Executive 5-64
CALL ENACKP Executive 5-66
CALL ENASTR Executive 5-65
CALL EXIT Executive 5-70
CALL EXITIF Executive 5-67
CALL EXST Executive 5-71
CALL EXTTSK Executive 5-73
CALL GETCII Executive 5-79
CALL GETLUN Executive 5-81
CALL GETMCR Executive 5-84
CALL GETPAR Executive 5-89
CALL GETREG Executive 5-91
CALL GETTIM Executive 5-95
CALL GETTSK Executive 5-97
CALL GMCX Executive 5-86
CALL GTCMCI Executive 5-75
CALL INASTR Executive 5-53
CALL MAP Executive 5-100
CALL MARK Executive 5-103
CALL PWRUP Executive 5-170
CALL QIO Executive 5-112
CALL RCST Executive 5-118
CALL READEF Executive 5-125, 5-127
CALL RECEIV Executive 5-120
CALL RECOEX Executive 5-122
CALL RESUME Executive 5-139
CALL RPOI Executive 5-129
CALL RREF Executive 5-136
CALL RUN Executive 5-140
CALL SDRC Executive 5-152
CALL SDRP Executive 5-155
CALL SEND Executive 5-150
CALL SETCLI Executive 5-148

CALL SETEF Executive 5-159
CALL SETTIM Executive 5-195
CALL SMSG Executive 5-162
CALL SPAWN Executive 5-172
CALL SREA Executive 5-184
CALL SREF Executive 5-188
CALL SREX Executive 5-184
CALL statement Error Logging 5-33
CALL STLOR Executive 5-198
CALL STOP Executive 5-200
CALL STOPFR Executive 5-201
CALL SUSPND Executive 5-169
CALL ULGF Executive 5-206
CALL UNMAP Executive 5-207
CALL USTP Executive 5-209
CALL WAIT Executive 5-103
CALL WAITFR Executive 5-225
CALL WFSNE Executive 5-221
CALL WTQIO Executive 5-116
$CALLOV
  predefined syntax element in MML System Management 12-45
CALLS argument PDP-11 MACRO-11 8-11
CAN command MCR Operations 3-33
  VMR System Management 10-11
CANCEL command Command Language 7-22 to 7-23, 9-6
MCR Operations 3-33
  Basic MCR System Generation (11S) 2-2
  command line format MCR Operations 3-33
  example MCR Operations 3-33
  VMR System Management 10-11
    command line format System Management 10-11
    example System Management 10-11
Cancel I/O entry point Writing I/O Driver 2-4
  DDT conditions Writing I/O Driver 4-10
Cancel Mark Time Requests directive Executive 5-29
Cancel Selective Marktime directive System Generation (11M) 4-28
Cancel Time Based Initiation Requests directive Executive 5-51
CAPS LOCK key Introduction 1-9
Command Language 3-14
Card input error
  error recovery I/O Drivers 11-3
Card reader I/O Drivers 11-1
  binary format I/O Drivers 11-9
  control character I/O Drivers 11-8
  data format I/O Drivers 11-9
  data format translation I/O Drivers 11-9
  device-specific QIO I/O Drivers 11-3
  format translation I/O Drivers 11-10
  indicator light
    list of I/O Drivers 11-5 to 11-6
  standard QIO I/O Drivers 11-2
  switch
    list of I/O Drivers 11-5 to 11-6
Card reader check recovery I/O Drivers 11-4
Card reader format, sequence number as comment PDP-11 MACRO-11 6-19
CARD_FORMAT argument PDP-11 MACRO-11 8-9
Carriage control
  See also RAT field in FAB
  RMSDEF utility RMS-11 Utilities A-9
  specifying

Carriage control
  specifying (Cont.)
    for unlabeled tape — I/O Operations G-11
Carriage return
  See also RETURN key
  automatic — I/O Drivers 2-34, 3-27 to 3-28
Carriage-control device
  See FB$CCL mask in DEV field
Carriage-return carriage control
  See FB$CR mask in RAT field
CARRIAGE_CONTROL
  RMSDES utility — RMS-11 Utilities 2-37
Case control — PDP-11 MACRO-11 6-19
CASE statement — Error Logging 5-34
CASE_MATCH argument — PDP-11 MACRO-11 8-9
Cassette — I/O Drivers 9-1; RMS-11 Macros 3-2, 5-20, 5-37, 5-43, 5-77, 5-88, 5-104, 5-111, 5-118
  block length — I/O Drivers 9-8
  device-specific QIO — I/O Drivers 9-3
  space functions — I/O Drivers 9-7
  standard QIO — I/O Drivers 9-2
  status return — I/O Drivers 9-3 to 9-5
  structure — I/O Drivers 9-6
$CAT5 (ASCII to Radix-50) — System Library 4-6
$CAT5B (ASCII with Blanks to Radix-50) — System Library 4-8
Catch-All Task
  see also TDX
  restriction for DCL — Release Notes 1-28
Catchall task — System Management 12-3
/CB switch
  CMP utility — Utilities 12-2
CBD — Executive 5-42
$CBDAT (Binary date to decimal) — System Library 5-2
$CBDMG (Binary to unsigned decimal) — System Library 5-3
$CBDSG (Binary to signed decimal) — System Library 5-4
CBM macro
  MML — System Management 12-28
$CBOMG (Binary to unsigned octal) — System Library 5-7
$CBOSG (Binary to signed octal) — System Library 5-8
$CBTA (General purpose binary to ASCII) — System Library 5-10
$CBTMG (Binary byte to octal) — System Library 5-9
CC command
  EDI editor — Utilities 2-30
/CC keyword
  MOUNT command — MCR Operations 3-119
/CC switch — Task Builder 10-7
CCBM macro
  MML — System Management 12-28
CCML$ — I/O Operations 6-9, 6-12
CD command
  EDI editor — Utilities 2-30
/CD switch
  PIP utility — Utilities 3-16
  RMSBCK utility — RMS-11 Utilities 6-8 to 6-9
CDA — Error Logging 1-1
  See also Crash dump
  debugging driver code — Writing I/O Driver 3-20
  installed — Crash Dump Analyzer 1-3
  invoking from indirect command file — Crash Dump Analyzer 1-5
  running — Crash Dump Analyzer 1-3
  uninstalled — Crash Dump Analyzer 1-3

CDA command line — Crash Dump Analyzer 1-3
  binary file — Crash Dump Analyzer 1-3
  crash input file — Crash Dump Analyzer 1-4
  default — Crash Dump Analyzer 1-4
  list file — Crash Dump Analyzer 1-3
  symbol file — Crash Dump Analyzer 1-4
CDA message
  analysis
    example of — Crash Dump Analyzer A-1
  fatal
    example of — Crash Dump Analyzer A-1
$CDDMG (Double-precision binary
    to decimal) — System Library 5-5
CDR symbolic argument — PDP-11 MACRO-11 6-19
CDT field in DAT block
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-14
  OPEN operation — RMS-11 Macros 5-81
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-16
$CDTB (Decimal to binary) — System Library 4-4
Cell — RMS-11 Introduction 3-5
  relative files — RMS-11 User's Guide 4-1
  sequential files — RMS-11 User's Guide 3-2
Central buffer pool — RMS-11 Macros 3-5
Central processing unit
  See CPU
CFL — Error Logging 1-1, 1-3, 1-5, 5-1
  declaration
    conditional — Error Logging 5-29 to 5-30
    data item — Error Logging 5-26
    definition — Error Logging 5-3
    scope — Error Logging 5-26
    variable — Error Logging 5-26
  definition — Error Logging 5-2
  expression
    conditionals in — Error Logging 5-2
    list handling — Error Logging 5-39
  intermediate form modules — Error Logging 5-1
  lexical conditionals — Error Logging 5-36
  signalling — Error Logging 5-40
  spaces and tabs in text — Error Logging 5-2
  statement
    ACTION — Error Logging 5-30
    BEGIN-END — Error Logging 5-36
    CALL — Error Logging 5-33
    CASE — Error Logging 5-34
    CONTROL — Error Logging 5-32
    CRASH — Error Logging 5-41
    DECLARE — Error Logging 5-27
    DECODE — Error Logging 5-32
    DECREMENT — Error Logging 5-31
    DYNAMIC TABLE — Error Logging 5-37
    ENABLE — Error Logging 5-40
    FILE — Error Logging 5-37 to 5-38
    FIND — Error Logging 5-39
    IF-THEN-ELSE — Error Logging 5-34
    INCREMENT — Error Logging 5-31
    LEAVE — Error Logging 5-35
    LIST — Error Logging 5-39
    LITERAL — Error Logging 5-33
    MESSAGE — Error Logging 5-41
    MODULE — Error Logging 5-32
    PACKET — Error Logging 5-28
    POINTER — Error Logging 5-38 to 5-39
    PRINT FORMATTING — Error Logging 5-41
    PROCEDURE — Error Logging 5-33 to 5-34

CFL
  statement (Cont.)
    PUT Error Logging 5-39
    RETURN Error Logging 5-33
    SEARCH Error Logging 5-40
    SELECT Error Logging 5-34 to 5-35
    SET Error Logging 5-31
    SIGNAL Error Logging 5-40 to 5-41
    SIGNAL STOP Error Logging 5-41
    SUBPACKET Error Logging 5-29
    TABLE Error Logging 5-37
    WHILE/UNTIL/DO Error Logging 5-35
    WRITE Error Logging 5-31
    WRITE GROUP Error Logging 5-31
  table structure Error Logging 5-36
  user interface
    command mode Error Logging 5-43
    option mode Error Logging 5-43
CFL command line
  DEVSM1 Error Logging 4-36
CFL command mode Error Logging 5-43
CFL comments Error Logging 5-3
CFL data type
  ASCII Error Logging 5-5
  automatic conversion Error Logging 5-4
  binary byte Error Logging 5-4
  bit Error Logging 5-4, 5-7
  expression Error Logging 5-4
  logical Error Logging 5-4
  numeric Error Logging 5-5
    attribute option Error Logging 5-5
    byte Error Logging 5-5
    default Error Logging 5-5
    longword Error Logging 5-5
    quadword Error Logging 5-5
    radix option Error Logging 5-5
    value Error Logging 5-5
    word Error Logging 5-5
  numeric field Error Logging 5-7
  numeric literal Error Logging 5-6
  pointer Error Logging 5-7
  RSXTIME Error Logging 5-7
  string Error Logging 5-4
    numeric value Error Logging 5-4
  VMSTIME Error Logging 5-7
CFL expression Error Logging 5-9
  definition Error Logging 5-3
  logical operators Error Logging 5-10
  numeric operators Error Logging 5-13 to 5-15
  relational operators Error Logging 5-11 to 5-13
  string operators Error Logging 5-9
CFL file
  command Error Logging 5-3
  error Error Logging 5-4
  input Error Logging 5-3
  report Error Logging 5-3
  user Error Logging 5-3
CFL function
  %CND Error Logging 5-17
  %CNV Error Logging 5-17 to 5-18
  %CNV$RSXTIME Error Logging 5-19
  %CNV$STRING Error Logging 5-19
  %CNV$VMSTIME Error Logging 5-19
  %COD Error Logging 5-19
  %COM Error Logging 5-20
  %CTL Error Logging 5-21
  format Error Logging 5-16

CFL function (Cont.)
  %LOK — Error Logging 5-21
  %PKT — Error Logging 5-22
  %RPT — Error Logging 5-22
  %STR — Error Logging 5-23 to 5-24
  %TIM — Error Logging 5-25
  %USR — Error Logging 5-25
CFL literals — Error Logging 5-9
CFL named variable — Error Logging 5-8
  CONTEXT — Error Logging 5-8
  COUNT — Error Logging 5-9
  LENGTH — Error Logging 5-8
  POINTER — Error Logging 5-8
CFL operands
  literals — Error Logging 5-9
  variables — Error Logging 5-9
CFL operator precedence — Error Logging 5-15
CFL option mode — Error Logging 5-43
CFL primitives — Error Logging 5-1
CFL statement
  definition — Error Logging 5-3
.CHAIN directive — MCR Operations 4-28
  example — MCR Operations 4-29
  format — MCR Operations 4-28
Chaining — System Generation (11M) 4-9
  Executive 4-1, 5-129, 5-155

  See also Saved answer file
  See also Standard Function
      System
  definition — System Generation (11M) 3-9
  restriction — System Generation (11M) 3-9
CHANGE command — EDT Editor 2-5, 2-36, 7-1
  EDI editor — Program Development 2-16, 7-5
  Utilities 2-12, 2-29

  for keypad editing — EDT Editor 5-2
  for nokeypad editing — EDT Editor 8-1
Change mode
  EDT — Introduction 2-3, 2-17, Gloss-6
Changeable key — RMS-11 Introduction 3-10
  RMS-11 User's Guide 6-9

  See also XB$CHG mask in FLG field
CHANGES
  RMSDES utility — RMS-11 Utilities 2-40
Changing
  See also Displaying
  contents of location — ODT 4-1
  display mode — ODT 4-3
Changing case
  keypad editing — EDT Editor 2-18, 5-48
  nokeypad editing — EDT Editor 8-6
  showing current case setting — EDT Editor 9-15
CHAR function — EDT Editor 5-16
Character — ODT 2-3 to 2-4
  control — I/O Drivers 2-27, 2-33
  MCR Operations 2-14

    OPEN command — MCR Operations 3-135
  conversion to 16-bit value — PDP-11 MACRO-11 6-25
  correcting transposition of — EDT Editor 10-6
  delimiting — PDP-11 MACRO-11 3-3
  flagging uppercase or lowercase — EDT Editor 9-2
  generating printable — PDP-11 MACRO-11 6-26 to 6-28
  illegal — ODT 2-8
  PDP-11 MACRO-11 3-3

  legal label — PDP-11 MACRO-11 2-3
  lowercase
    converting — MCR Operations 3-184
    System Management 10-51

Character (Cont.)
  separating — PDP-11 MACRO-11 3-3
  special — PDP-11 MACRO-11 3-1 to 3-3
  string packing — PDP-11 MACRO-11 6-29 to 6-30
  task-buffering of received — I/O Drivers 2-36
  translating
    magtape — MCR Operations 3-124
  vertical format control — I/O Drivers 2-34, 10-6
Character editing
  See CHANGE command
Character set
  ASCII — PDP-11 MACRO-11 A-1 to A-3
  legal — PDP-11 MACRO-11 3-1 to 3-3
  Radix-50 — PDP-11 MACRO-11 A-4 to A-5
Checkpoint
  area
    in task image — Task Builder B-9
  file
    allocating — MCR Operations 3-8
      number of blocks — MCR Operations 3-8
    discontinuing — MCR Operations 3-8
      example — MCR Operations 3-8
    freeing — MCR Operations 3-9
  space
    allocating — MCR Operations 3-8
      Task Builder 10-6, 10-10
Checkpoint file — Command Language 5-11, 5-65, 5-74, 6-68
Checkpoint File Header — I/O Operations E-2
Checkpointable task
  specifying a — Task Builder 10-6, 10-10
Checkpointing — Introduction 5-6 to 5-7, 5-9, Gloss-2, Gloss-6
  System Generation (11M) 4-43
  Command Language 5-11, 6-68
  during buffered I/O — Executive 2-11
  during terminal input — I/O Drivers 3-31
  dynamic common regions — System Management 14-3
  static common regions — System Management 14-3
  tasks — System Management 14-3
  with system checkpoint file — System Generation (11M) 4-43
Checksum
  calculating
    SLP utility — Utilities 13-3
  file content validating
    PAT utility — Utilities 14-6
CHGC command — EDT Editor 8-6
CHNGCASE function — EDT Editor 2-18, 5-48
  select range — EDT Editor 2-18
CINT$ — Executive 5-18 to 5-19
CINT$ directive — Writing I/O Driver 3-1
Circumflex (^) — Introduction 1-4, Gloss-6
  Command Language 3-15, 3-18
  cross-reference listing — Task Builder 10-12 to 10-13
  global cross-reference
    of an overlaid task — Task Builder 4-13
Circumflex (^) and error message — EDT Editor A-1
Circumflex (^) command — EDT Editor 8-25
  ODT 2-5, 4-4
CIS
  See Commercial Instruction Set
/CKP keyword
  INSTALL command — MCR Operations 3-94
    VMR — System Management 10-21
  RUN command — MCR Operations 3-152
CL command
  EDI editor — Utilities 2-29

CL:
  pseudo device — Command Language 5-6
CLEAR command — EDT Editor 7-2
  RMSDES utility — RMS-11 Utilities 2-6, 2-18, 2-25 to 2-26
    defining areas by default — RMS-11 Utilities 2-44
    in indirect command file — RMS-11 Utilities 2-4
    PROTECTION attribute — RMS-11 Utilities 2-33
    with CREATE — RMS-11 Utilities 2-8, 2-28
    with SAVE — RMS-11 Utilities 2-27
Clear Event Flag directive — Executive 5-28
Clear relocation register — ODT 2-10
Clearing attributes (RMSDES)
  See Attribute, clearing
Clearing screen with CTRL/W — EDT Editor 5-8
Clearing terminal end of file — I/O Operations 4-25
CLEF$ — Executive 5-28
/CLI — Crash Dump Analyzer 2-1
  keyword
    HELP command — MCR Operations 3-65
    INSTALL command — MCR Operations 3-95
      VMR — System Management 10-22
    SET command — MCR Operations 3-174
  switch
    Indirect — MCR Operations 4-19
CLI — EDT Editor 2-2; Introduction 1-5, 1-8, Gloss-6; Command Language 1-1; System Management 11-1, 11-3 to 11-4
  See also DCL
  adding to account entry — System Management 2-3
  alternate — System Management 12-2
  changing — System Management 2-5
  contained in account entry — System Management 2-1
  continuation lines — System Management 11-8
  data structures
    initializing — MCR Operations 3-36
    removing — MCR Operations 3-35
  DCL — Program Development 1-1 to 1-3
  default
    resetting — MCR Operations 3-31
    specifying — MCR Operations 3-174
  definition — Batch and Queue Gloss-2
  disabling — MCR Operations 3-35, 3-37
  displaying — System Management 2-4
    command line — MCR Operations 4-3
  eliminating — MCR Operations 3-35
  enabling — MCR Operations 3-36
  example — System Management 11-10 to 11-20
    FORTRAN — System Management 11-15 to 11-20
    MACRO-11 — System Management 11-10 to 11-15
  Executive directives — System Management 11-3
  information
    displaying — MCR Operations 3-39
  installing — MCR Operations 3-95; System Management 10-22
  interaction with system — System Management 11-3 to 11-4
  MCR — Program Development 1-1 to 1-3; System Management 2-3
  multi-CLI support — System Management 2-1, 2-3, 2-5
  prompting — System Management 11-7 to 11-9
  removing — System Management 10-35
  serial command processing — System Management 11-9
  setting up — MCR Operations 3-35
  status bit
    list — MCR Operations 3-39

CLI (Cont.)
  system messages to — System Management 11-5 to 11-7
  task names — System Management 11-4
  user-written — System Generation (11M) 4-61
  writing — System Management 11-3
CLI command — MCR Operations 3-35
  command line format — MCR Operations 3-35
  error message — MCR Operations 3-40
  example — MCR Operations 3-40
  keyword
    /DISABLE — MCR Operations 3-35
    /ELIM — MCR Operations 3-35
    /ENABLE — MCR Operations 3-36
    /INIT — MCR Operations 3-36
    /MESSAGE — MCR Operations 3-39
    /SHOW — MCR Operations 3-39
    /UNOVR — MCR Operations 3-40
  subkeyword
    /CPR — MCR Operations 3-36
    /DISABLE — MCR Operations 3-37
    /DPR — MCR Operations 3-37
    /LGO — MCR Operations 3-37
    /MESSAGE — MCR Operations 3-38
    /NULL — MCR Operations 3-38
    /PRIV — MCR Operations 3-38
    /PROMPT — MCR Operations 3-38
    /QUIET — MCR Operations 3-38
    /RESTRICT — MCR Operations 3-39
    /TASK — MCR Operations 3-39
CLI Parser Block
  See CPB
CLI parser block dump — Crash Dump Analyzer 3-2, 3-31
<CLI> symbol — MCR Operations 4-13
$CLINS routine — Writing I/O Driver 5-5
CLKDF$ — Crash Dump Analyzer B-4
Clock
  system — System Generation (11M) 4-14
  watchdog timer — System Generation (11M) 4-15
Clock queue — Command Language 7-12 to 7-15, 7-23, 7-60, 9-37
  information
    displaying — MCR Operations 3-42
CLOCK QUEUE command — MCR Operations 3-42
Clock queue dump — Crash Dump Analyzer 3-50
Clock queue switch — Crash Dump Analyzer 2-3
CLOSE & DELETE command
  EDI editor — Utilities 2-30
CLOSE command
  EDI editor — Utilities 2-27, 2-29
.CLOSE directive — MCR Operations 4-29
  format — MCR Operations 4-29
$CLOSE macro — RMS-11 Macros 5-3
CLOSE operation — RMS-11 Introduction 4-2
  RMS-11 User's Guide 1-18
  RMS-11 Macros 3-8
  BDB requirement — RMS-11 Macros 2-8
  $CLOSE macro — RMS-11 Macros 5-3
  I/O buffer requirement — RMS-11 Macros 2-7
  wildcard loop — RMS-11 Macros 3-10
CLOSE SECONDARY command
  EDI editor — Utilities 2-30
CLOSE$
  automatic file truncation — I/O Operations 4-22
  effect of on F.CNTG — I/O Operations 2-7
  format — I/O Operations 3-18
  macro call — I/O Operations 3-18

CLOSES command
  EDI editor — Utilities 2-30
Closing
  location — ODT 4-2
    definition — ODT 4-1
  open location — ODT 2-5, 4-2
/CLQ — Crash Dump Analyzer 2-1
CLQ command — MCR Operations 3-42
  command line format — MCR Operations 3-42
  example — MCR Operations 3-42
CLSTR option — Task Builder 11-8 to 11-9
Cluster library — Task Builder 5-44
  RMS-11 User's Guide 8-7 to 8-9
  See also Library
Cluster size
  See RTV field in FAB
CLUSTER_SIZE
  RMSDES utility — RMS-11 Utilities 2-31
/CM switch — Task Builder 10-8
  SLP utility — Utilities 13-15
/CMD keyword
  RUN command — MCR Operations 3-152
CMKT$ — Executive 5-29
/CMP switch
  DSC utility — Utilities 8-14
CMP utility — Command Language 4-69 to 4-75, 9-13
  See also DIFFERENCES command
  command line — Utilities 12-1
  error message — Utilities 12-6
  output file format — Utilities 12-4
  switch — Utilities 12-2
    default — Utilities 12-4
CNCT$ — Executive 5-31
%CND function — Error Logging 5-17
CND symbolic argument — PDP-11 MACRO-11 6-12
CNF
  DSC64K.SYS and
    See DSC utility
  stand-alone BRU and
    See BRU utility
.CNF module — Error Logging 4-1
%CNV function — Error Logging 5-17 to 5-18
%CNV$RSXTIME — Error Logging 5-19
%CNV$STRING — Error Logging 5-19
%CNV$VMSTIME — Error Logging 5-19
/CO file switch
  PRI command — Batch and Queue 2-6
  QUE /MOD command — Batch and Queue 2-21
/CO job switch
  PRI command — Batch and Queue 2-4
  QUE /MOD command — Batch and Queue 2-20
/CO switch — Task Builder 10-9
  CMP utility — Utilities 12-2
  FLX utility — Utilities 4-6
  LBR utility — Utilities 10-10
  PIP utility — Utilities 3-11
CO:
  pseudo device — Command Language 5-6
COBOL — Introduction 4-12
COBOL command — Introduction 4-13
  Command Language 6-2, 6-21 to 6-32, 9-6 to 9-7
COBOL-81
  compiler
    building — Release Notes 1-37
%COD — Error Logging 5-19

COD field in ALL block
  offset — RMS-11 Macros 6-2
  summary
    XB$ALL code — RMS-11 Macros 6-10
COD field in DAT block
  offset — RMS-11 Macros 6-14
  summary
    XB$DAT code — RMS-11 Macros 6-17
COD field in KEY block
  offset — RMS-11 Macros 6-67
  summary
    XB$KEY code — RMS-11 Macros 6-70
COD field in PRO block
  offset — RMS-11 Macros 6-108
  summary
    XB$PRO code — RMS-11 Macros 6-110
COD field in SUM block
  offset — RMS-11 Macros 6-145
  summary
    XB$SUM code — RMS-11 Macros 6-147
Code
  access — Task Builder 2-4 to 2-5
  allocation — Task Builder 2-4 to 2-5
  relocation — Task Builder 2-4
  scope — Task Builder 2-4, 2-7
  type — Task Builder 2-5, 2-7
Code and mask symbol
  declaring
    ALL block — RMS-11 Macros C-3 to C-4
    DAT block — RMS-11 Macros C-3 to C-4
    FAB — RMS-11 Macros C-1
    KEY block — RMS-11 Macros C-3 to C-4
    NAM block — RMS-11 Macros C-2
    PRO block — RMS-11 Macros C-3 to C-4
    RAB — RMS-11 Macros C-2
    SUM block — RMS-11 Macros C-3 to C-4
    XAB — RMS-11 Macros C-4
  value
    ALL block — RMS-11 Macros 6-2
    DAT block — RMS-11 Macros 6-14
    FAB — RMS-11 Macros 6-22
    KEY block — RMS-11 Macros 6-67
    NAM block — RMS-11 Macros 6-94
    PRO block — RMS-11 Macros 6-108
    RAB — RMS-11 Macros 6-115
    SUM block — RMS-11 Macros 6-145
Code sharing — PDP-11 MACRO-11 6-45
Code symbol
  See Code and mask symbol
Coding standard — PDP-11 MACRO-11 E-1 to E-16
COLOG
  stopping
    using SHUTUP — System Management 8-4
/COLOG keyword
  SET command — MCR Operations 3-174
Colon (:) — Command Language 3-16
  DCL — Command Language 1-9
%COM — Error Logging 5-20
COM symbolic argument — PDP-11 MACRO-11 6-11
Comma (,) — ODT 2-4
  See also ODL operator
COMMAN symbol — MCR Operations 4-17
Command — Introduction 1-1, 1-4, 2-4, Gloss-7
  See also individual command entries
  See also RMSDES

Command (Cont.)
  correcting mistake — EDT Editor 5-47
  DCL
    adding to — System Management 12-7, 12-9 to 12-11
    definition — System Management 12-7, 12-9 to 12-11
    deleting from — System Management 12-12
    modifying — System Management 12-12
    tables — System Management 12-6 to 12-12, 12-17 to 12-20, 12-46 to 12-47
  file
    indirect — Task Builder 1-5
    interaction with indirect — Task Builder 1-5 to 1-6
    level of indirection — Task Builder 1-7
    with ODL — Task Builder 3-29
  keypad editing — EDT Editor 1-9
    See also Function
  library — MCR Operations 4-19
    default file type for — MCR Operations 4-20
  line — MCR Operations 1-1
    CLI
      displaying — MCR Operations 4-3
    comment in — MCR Operations 1-4
      Task Builder 1-8
    compressing — MCR Operations 1-2
    form — Task Builder 1-2
    format — MCR Operations 2-3
    Indirect — MCR Operations 4-21
    interpreter
      See CLI
    multi-line input — Task Builder 1-3
    option input — Task Builder 1-3
    output file interpretation — Task Builder 1-3
    parsing — MCR Operations 1-2, 1-5, 4-46
    passing — MCR Operations 3-152
    processing
      from another file — MCR Operations 4-28
      parallel — MCR Operations 3-197
    quotation marks in — MCR Operations 1-2
    substitution in — MCR Operations 4-17
      controlling format of — MCR Operations 4-18
    terminating — MCR Operations 1-2
    terminating character — Task Builder 1-3, 1-5 to 1-6
    to build a task — Task Builder 1-2
    UFD convention — Task Builder 1-9
    VMR — System Management 10-4
      comment in — System Management 10-5
  line editing — EDT Editor 1-9, 2-20, 7-1
  MCR
    summary — MCR Operations 1-5
    testing in UETP — System Management 9-3
  multiple
    for Console Logger — System Management 3-6
  name
    VMR — System Management 10-4
  nokeypad editing — EDT Editor 1-10, 2-36, 8-1, 8-5
  ODT — ODT 2-4
    at sign (@) — ODT 2-5, 4-4
    B — ODT 2-8, 3-1 to 3-2
    cancel — ODT 2-8
    circumflex (^) — ODT 2-5, 4-4
    D — ODT 2-8
    E — ODT 2-8, 6-3
    equal sign (=) — ODT 2-8, 7-2
    F — ODT 2-9, 6-4

Command
  ODT (Cont.)
    G — ODT 2-9, 3-2
    I — ODT 2-9
    K — ODT 2-9, 7-1
    L — ODT 2-9, 6-4
    line feed — ODT 2-5, 4-4
    N — ODT 2-10, 6-3
    O — ODT 2-10, 7-1
    P — ODT 2-10, 3-2 to 3-3
    R — ODT 2-10
    relative branch location (>) — ODT 2-6
    return from calculated location (<) — ODT 2-6
    return key — ODT 2-5, 4-2
    S — ODT 2-10, 3-3
    U — ODT 2-11
    underscore (_) — ODT 2-5, 4-5
    V — ODT 2-11
    W — ODT 2-11, 6-3
    X — ODT 1-4, 2-11
    Z — ODT 2-11
  parameter — MCR Operations 1-2
    VMR — System Management 10-4
  procedure
    DIGITAL-supplied — MCR Operations 4-20
      invoking — MCR Operations 4-21
    universal library of — MCR Operations 4-19
  processing — MCR Operations 1-5
  range specification — EDT Editor 6-7
  RMSDES utility — RMS-11 Utilities 2-1, 2-4
  sequence
    comments in — Task Builder 1-8
    simple — Task Builder 1-2
  structure of nokeypad — EDT Editor 8-4
  truncating — Introduction 1-12
  use of — EDT Editor 1-9
  VMR
    summary — System Management 10-5
Command dispatcher — Introduction Gloss-7
Command file
  creating — EDT Editor 4-9
  default — EDT Editor 4-9
  EDTINI.EDT — EDT Editor 4-9
  startup — EDT Editor 1-5, 4-1
Command file qualifier — EDT Editor 1-5, 4-1
  DCL — EDT Editor 4-2
  MCR — EDT Editor 4-5
Command format
  MAC task — PDP-11 MACRO-11 8-4 to 8-7
Command function — EDT Editor 2-20, 5-47
Command language
  kinds of — EDT Editor 2-2
Command Language Manual
  technical changes — Release Notes 1-7
Command level
  list of prompts — EDT Editor 2-3
  returning to — EDT Editor 5-54
Command line — EDT Editor 2-2, 4-1
  DCL format — EDT Editor 4-2
  DCL qualifier — EDT Editor 4-2 to 4-3
  EDT — EDT Editor 2-2
  example — EDT Editor 4-7
  format — Utilities 1-4
  ignoring blanks and tabs — I/O Operations 7-8
  MCR format — EDT Editor 4-4
  MCR qualifier — EDT Editor 4-5 to 4-6

Command line (Cont.)
  RECOVER qualifier — EDT Editor 3-1
Command Line Interpreter
  See CLI
COMMAND LINE INTERPRETER command — MCR Operations 3-35
Command line interpreter switch — Crash Dump Analyzer 2-3
Command line parsing
  error — I/O Operations 6-21
Command line processing — I/O Operations 6-1
  data flow during — I/O Operations 6-2
COMMAND qualifier
  DCL — EDT Editor 4-3
  MCR — EDT Editor 4-6
Command qualifier — Introduction 2-3, Gloss-7, Gloss-27
Command semantic parser — I/O Operations 6-19 to 6-20
Command string
  RMSBCK utility — RMS-11 Utilities 6-2 to 6-3
  RMSCNV utility — RMS-11 Utilities 4-3 to 4-4
  RMSDEF utility — RMS-11 Utilities A-5
  RMSDSP utility — RMS-11 Utilities 5-2 to 5-3
  RMSIFL utility — RMS-11 Utilities 3-2 to 3-3
    checking — RMS-11 Utilities 3-9
  RMSRST utility — RMS-11 Utilities 7-2 to 7-3
Command String Interpreter
  See CSI
Command String Syntax Analyzer — I/O Operations 6-18 to 6-19
Command summary — Batch and Queue 4-1
Command utility
  messages — RMS-11 Utilities C-1
  RMSBCK utility — RMS-11 Utilities 6-1
  RMSCNV utility — RMS-11 Utilities 4-1
  RMSDSP utility — RMS-11 Utilities 5-1
  RMSIFL utility — RMS-11 Utilities 3-1
  RMSRST utility — RMS-11 Utilities 7-1
Comment — MCR Operations 1-4
  block directive — PDP-11 MACRO-11 6-18
  card reader format — PDP-11 MACRO-11 6-19
  DCL — Command Language 1-11
  delimiter — PDP-11 MACRO-11 3-2
  field — PDP-11 MACRO-11 2-1, 2-4 to 2-5
  in command sequence — Task Builder 1-8
  in line — Task Builder 1-8
  indirect command file with — MCR Operations 4-3
  VMR — System Management 10-5
COMMENTS argument — PDP-11 MACRO-11 8-11
Commercial instruction set — PDP-11 MACRO-11 C-3 to C-4
Commercial-at sign (@) — Command Language 3-16
Common — Task Builder 5-1, 5-26 to 5-31
  See also Region
  allocation diagram — Task Builder 5-20
  assigning references — Task Builder 5-23
  building a linking task — Task Builder 5-21 to 5-22
  building and linking to — Task Builder 5-14, 5-17 to 5-18
  building and linking to a device — Task Builder 5-26 to 5-31
  device — Task Builder 5-26 to 5-31
    See also Device common
  establishing offset in — Task Builder 5-28
  in MACRO-11
    building and linking to — Task Builder 5-17 to 5-18
    building and linking to a
      See Region
  installing in RSX-11M — Task Builder 5-2 to 5-3, 5-20

Common (Cont.)
  installing in RSX-11M-PLUS — Task Builder 5-2 to 5-3, 5-20
  linking to region — Task Builder 5-14
  loading — System Management 10-20
  map — Task Builder 5-19
  partition — System Management 14-1
  PSECT
    building a linking task — Task Builder 5-23
  region — Task Builder 2-19
  resident — Task Builder 5-1 to 5-2
    declaring — Task Builder 11-11, 11-28
    name block data — Task Builder B-8
  specifying a — Task Builder 10-9
  typical — Task Builder 5-2
Common block
  displaying
    information — System Generation (11S) 2-22
  fixing — System Generation (11S) 2-9
  installing — System Generation (11S) 2-9
  loading — System Generation (11S) 2-10
Common block attached
  determining region ID of — Executive 5-16
Common Block Directory
  See CBD
Common block directory dump — Crash Dump Analyzer 3-36
Common event flag
  reading — Executive 5-127
COMMON option — Task Builder 11-11 to 11-12
Communications products
  DECnet — System Generation (11M) 4-33
  SYSGEN support — System Generation (11M) 4-33
$COMPARE macro — RMS-11 Macros 2-16
  example — RMS-11 Macros 7-3, 7-7, 7-11, 7-15

/COMPARE qualifier
  BRU utility — Utilities 7-14
COMPAREDATA YES/NO command
  IOX — System Management 4-27
Compatibility
  file specification — RMS-11 User's Guide A-2, A-4
Compilation path
  RSX-11M — Error Logging 4-11
Compile — Command Language 6-1
Compiled program
  fixed line number — EDT Editor 6-3
Compiler — Introduction 4-3, Gloss-7
  See also High-level language
  BASIC-PLUS-2 — Command Language 6-2, 6-12 to 6-13
  COBOL-81 — Command Language 6-2, 6-21 to 6-27, 9-6
    building — Release Notes 1-37
  COBOL/C11 — Command Language 6-2, 6-27 to 6-32, 9-7
  CORAL 66 — Command Language 6-2, 6-32 to 6-39, 9-9
  F4P — Command Language 6-2, 6-13 to 6-20, 9-16
  F77 — Command Language 6-2, 6-13 to 6-20, 9-16
  FOR — Command Language 6-2, 6-13 to 6-20, 9-16
  FORTRAN IV — Command Language 6-2, 6-13 to 6-20, 9-16
  FORTRAN IV-PLUS — Command Language 6-2, 6-13 to 6-20, 9-16
  FORTRAN-77 — Command Language 6-13 to 6-20

Compiler (Cont.)
  PDP-11 COBOL — Command Language 6-2, 6-27 to 6-32, 9-7
Compiler conditional
  literal declaration — Error Logging 4-12
Complement
  See One's or Two's complement
Completion
  handler — RMS-11 Macros 2-17
  return macro
    declaring — RMS-11 Macros C-2
  symbol
    declaring — RMS-11 Macros C-3
Completion status
  See STS field in FAB
  See STS field in RAB
  See STV field in FAB
  See STV field in RAB
Complex relocatable expression — PDP-11 MACRO-11 3-18
Complex relocation — PDP-11 MACRO-11 4-1; Task Builder A-22
  entry — Task Builder A-23
  operation codes — Task Builder A-22
Compression — RMS-11 User's Guide 5-10, 5-16, 6-7, 6-9
  RMSIFL utility — RMS-11 Utilities 3-11
Computational function — Error Logging 5-20
CON symbolic argument — PDP-11 MACRO-11 6-42
Concatenated object module
  using to reduce overhead — Task Builder F-4
CONCATENATION CHARACTER command
  EDI editor — Utilities 2-30
Concatenation indicator — PDP-11 MACRO-11 3-3
Concurrent I/O activity
  optional logging — Error Logging 4-23
Conditional assembly — PDP-11 MACRO-11 6-50 to 6-54, 6-56
  block — PDP-11 MACRO-11 7-3
  directive — PDP-11 MACRO-11 6-50 to 6-56
    case sensitivity control — PDP-11 MACRO-11 6-19
    nested — PDP-11 MACRO-11 6-52
  immediate — PDP-11 MACRO-11 6-56
Conditional assembly symbol
  LD$xx — Writing I/O Driver 3-5
Conditional declaration — Error Logging 5-30
Conditional function — Error Logging 5-17
Conditional routine — Writing I/O Driver 5-1
CONDITIONALS argument — PDP-11 MACRO-11 8-11
<CONFIG> symbol — MCR Operations 4-13
Configuration
  See also Autoconfigure
  hardware — System Generation (11S) 1-2
  of devices in IOX — System Management 4-28
  RMS-11 utility — Release Notes 2-20
  saved host — System Generation (11M) 4-7
  saved peripheral — System Generation (11M) 4-7
  software — System Generation (11S) 1-2
CONFIGURE command
  IOX — System Management 4-28
Connect directive — Executive 5-31
$CONNECT macro — RMS-11 Macros 5-6
CONNECT operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
  BDB requirement — RMS-11 Macros 2-8
  block stream — RMS-11 Macros 4-13
  $CONNECT macro — RMS-11 Macros 5-6
  I/O buffer requirement — RMS-11 Macros 2-7

CONNECT operation (Cont.)
  indexed files — RMS-11 User's Guide 7-2
  IRAB requirement — RMS-11 Macros 2-5
  key buffer requirement — RMS-11 Macros 2-6
  record stream — RMS-11 Macros 4-8
  relative files — RMS-11 User's Guide 4-7
  sequential files — RMS-11 User's Guide 3-7
Connect to Interrupt Vector
    directive — Executive 5-18
Connecting and passing status — Executive 4-3
Console
  driver
    loading of — System Management 3-2
  log assignment
    displaying — System Management 3-4
  logging
    command
      descriptions of — System Management 3-3
      general format of — System Management 3-4
      summary of — System Management 3-3
    multiple commands — System Management 3-6
    session
      example — System Management 3-9
    starting — System Management 3-4
    stopping — System Management 3-5
  output
    device — System Management 3-1
      active Console Logger — System Management 3-1
      as a pseudo device — System Management 3-1
      as affected by REDIRECT — System Management 3-1
      control of I/O — System Management 3-1
      determining — System Management 3-7
      MCR REDIRECT restriction — System Management 3-8
      redirecting — System Management 3-7
      redirecting with MCR
          REDIRECT — System Management 3-8
      status of — System Management 3-7
    device I/O
      controlled by Console
          Logger — System Management 3-2
    task — System Management 3-1
      communication with! — System Management 3-2
      installed by SYSGEN — System Management 3-2
      selecting in SYSGEN — System Management 3-2
  terminal
    attaching to — System Management 3-3
    detaching from — System Management 3-3
    disabling — System Management 3-5
    displaying assignment — System Management 3-4
    reading from — System Management 3-3
    reassigning — System Management 3-5
    task communication to — System Management 3-2
    writing to — System Management 3-2
Console Logger — System Management 3-1
  aborting restriction — System Management 3-5
  communication with — System Management 3-2
  communication with a task — System Management 3-2
  console output device affect on — System Management 3-1
  controlling I/O to CO: — System Management 3-2
  effect when active — System Management 3-1
  error messages from — System Management 3-11 to 3-13
Console switch register — Executive 5-93
Constant register — ODT 2-6, 5-3, 7-3
  indicator — ODT 7-3
Container file
  RMSBCK utility — RMS-11 Utilities 6-1, 6-3, 6-7
  RMSDSP utility — RMS-11 Utilities 5-1, 5-3 to 5-4

Container file
  RMSDSP utility (Cont.)
    detailed display — RMS-11 Utilities 5-4
  RMSRST utility — RMS-11 Utilities 7-3, 7-9 to 7-10
CONTENTS argument — PDP-11 MACRO-11 8-11
Contents of location
  See Location
Context — RMS-11 Introduction 4-5; RMS-11 User's Guide 1-9, 1-15
  block — RMS-11 Introduction 4-7
    readable block — RMS-11 Introduction 4-7
    writable block — RMS-11 Introduction 4-7
  block stream — RMS-11 Macros 4-12
  CONNECT operation — RMS-11 User's Guide 3-7, 4-7, 7-2
  current record — RMS-11 Introduction 4-5; RMS-11 User's Guide 1-9, 1-15
  DELETE operation — RMS-11 User's Guide 4-7, 7-3
  DISCONNECT operation — RMS-11 User's Guide 3-7, 4-8
  FIND operation — RMS-11 User's Guide 3-8, 4-8, 7-3
  FLUSH operation — RMS-11 User's Guide 3-9, 4-10, 7-5
  GET operation — RMS-11 User's Guide 3-10, 4-11, 7-5
  next record — RMS-11 Introduction 4-5; RMS-11 User's Guide 1-9, 1-15
  PUT operation — RMS-11 User's Guide 3-11, 4-11, 7-6
  record stream — RMS-11 Macros 4-3
  REWIND operation — RMS-11 User's Guide 3-11, 4-12, 7-6
  TRUNCATE operation — RMS-11 User's Guide 3-12
  UPDATE operation — RMS-11 User's Guide 3-13, 4-12, 7-6
Contiguity — RMS-11 User's Guide 1-19, 8-12
  See also FB$CTG mask in FOP field
  See also XB$CTG mask in AOP field
  indexed files — RMS-11 User's Guide 6-13
  relative files — RMS-11 User's Guide 4-4
  RMSCNV utility — RMS-11 Utilities 4-2
  RMSDEF utility — RMS-11 Utilities A-15
  RMSIFL utility — RMS-11 Utilities 3-1, 3-6
  sequential files — RMS-11 User's Guide 3-5
  virtual — RMS-11 Introduction 2-3
CONTIGUOUS
  RMSDES utility
    area section — RMS-11 Utilities 2-46
    file section — RMS-11 Utilities 2-35
Contiguous — Introduction Gloss-7
Contiguous file — Introduction 4-8
Contiguous line range — EDT Editor 6-10
Continuation bucket — RMS-11 User's Guide 5-5
Continuation line — I/O Operations 6-5
  See also Line continuation
  CLI — System Management 11-8
CONTINUE command — Command Language 7-21 to 7-22, 9-8
CONTINUE/DEBUG command
  IAS — ODT 1-6
Continuing
  program execution — ODT 3-2
Control
  IOX command
    category — System Management 4-3
  RCT table
    revector status code — System Management 5-2
Control and Status Register
  See CSR

Control block — RMS-11 Introduction 4-7; RMS-11 User's Guide 1-14, 2-2; RMS-11 Macros 1-2
  ALL — RMS-11 Introduction 4-8
  chaining — RMS-11 Macros 2-12
  DAT — RMS-11 Introduction 4-8
  declaring — RMS-11 Macros 2-8
  examining — RMS-11 Macros 2-15
  FAB — RMS-11 Introduction 4-8
  field
    See Field
  initializing — RMS-11 Macros 2-8
  KEY — RMS-11 Introduction 4-8
  NAM — RMS-11 Introduction 4-8
  PRO — RMS-11 Introduction 4-8
  RAB — RMS-11 Introduction 4-8
  setting up — RMS-11 Macros 2-10
  SUM — RMS-11 Introduction 4-8
Control character — MCR Operations 2-14
  card reader — I/O Drivers 11-8
    list of — I/O Drivers 11-9
  OPEN command — MCR Operations 3-135
  terminal — I/O Drivers 2-27, 2-33, 3-20, 3-25
Control command — Introduction 1-4, 1-17
Control file
  universal library — Error Logging 5-1
Control File Language
  definition
    See also CFL — Error Logging 4-2
Control File Language compiler
  See CFL
Control file module — Error Logging 1-3
  architecture — Error Logging 4-1 to 4-2
  compilation path — Error Logging 4-11
  CPU level module — Error Logging 4-7
  data subpacket — Error Logging 4-3
  definition — Error Logging 4-1
  device ID subpacket — Error Logging 4-3
  device operation subpacket — Error Logging 4-3
  DEVSM1 — Error Logging 4-7
  DEVUDA — Error Logging 4-7
  Dispatch — Error Logging 4-3
  dispatching — Error Logging 4-1
  DMPALL — Error Logging 4-8
  DSP1M1 — Error Logging 4-4
  DSP2M1 — Error Logging 4-5
  DSP4M1 — Error Logging 4-5
  DSP5M1 — Error Logging 4-5
  DSP6M1 — Error Logging 4-6
  DSP7M1 — Error Logging 4-6
  E1134 — Error Logging 4-8
  E1144 — Error Logging 4-8
  E1160 — Error Logging 4-8
  E117X — Error Logging 4-8
  E11XX — Error Logging 4-8
  ERRORM — Error Logging 4-7
  EUNKWN — Error Logging 4-8
  FINLM1 — Error Logging 4-6
  FM1NM1 — Error Logging 4-6
  FM1WM1 — Error Logging 4-6
  FM2CM1 — Error Logging 4-6
  FM3CM1 — Error Logging 4-6
  FM4NM1 — Error Logging 4-6
  FM4WM1 — Error Logging 4-6

Control file module (Cont.)
  FMTNP1 — Error Logging 4-7
  format — Error Logging 5-1
  header subpacket — Error Logging 4-3
  INITM1 — Error Logging 4-7
  interaction of interface — Error Logging 4-13
  literal declaration — Error Logging 4-12
  naming conventions — Error Logging 4-1
  Non-DIGITAL device module — Error Logging 4-1
  options — Error Logging 4-12
  PARS1M — Error Logging 4-4
  PARS2M — Error Logging 4-4
  PARS3M — Error Logging 4-4
  PARSEM — Error Logging 4-4
  program control flow — Error Logging 4-10
  PRS2AM — Error Logging 4-4
  PRS2BM — Error Logging 4-4
  recompilation — Error Logging 4-13
  SELTM1 — Error Logging 4-4
  task subpacket — Error Logging 4-3
Control function — EDT Editor 5-5
  redefining — EDT Editor 10-1
  using — EDT Editor 1-7
Control I/O function mask — Writing I/O Driver 4-12
Control information
  parameter to FDOP$A — I/O Operations 2-15
Control key
  See CTRL key
Control section
  name — Task Builder A-5
  name entry — Task Builder A-5
CONTROL statement — Error Logging 5-32
CONTROL-C
  See CTRL/C
CONTROL-O
  See CTRL/O
CONTROL-Q
  See CTRL/Q
CONTROL-R
  See CTRL/R
CONTROL-S
  See CTRL/S
CONTROL-U
  See CTRL/U
CONTROL-Z
  See CTRL/Z
Control-Z mode — MCR Operations 4-32
CONTROL_C command
  IOX
    effect on CTRL/C — System Management 4-31
CONTROL_C YES/NO command
  IOX — System Management 4-31
CONTROL_FIELD_SIZE
  RMSDES utility — RMS-11 Utilities 2-37
Controller
  DECtape — I/O Drivers 6-1
  device — Introduction 5-12, Gloss-10
  disk
    UDA50 — I/O Drivers 5-4
Controller number — Writing I/O Driver 2-14
Convention
  for using system directives — Executive 5-5
  macro name — Executive 1-5
CONVERT command — Command Language 4-43 to 4-49, 9-8
Converting files — RMS-11 User's Guide 1-10, 1-12

$COP
  predefined syntax element in
    MML — System Management 12-43
COP macro
  MML — System Management 12-29
/COPIES file qualifier
  PRINT command — Batch and Queue 2-6
  SET QUEUE command — Batch and Queue 2-21
Copy
  big disk tape kit
    on-line — System Generation (11M) 2-32
    stand-alone — System Generation (11M) 2-6
  RA60/80/81, RC25 tape kit
    on-line — System Generation (11M) 2-32
    stand-alone — System Generation (11M) 2-6
  RC25 disk kit
    on-line — System Generation (11M) 2-34
    stand-alone — System Generation (11M) 2-9
  RK06/07 kit
    1600 bpi tape kit
      on-line — System Generation (11M) 2-35
      stand-alone — System Generation (11M) 2-11
    800 bpi tape kit
      on-line — System Generation (11M) 2-37
      stand-alone — System Generation (11M) 2-14
    disk kit
      on-line — System Generation (11M) 2-39
      stand-alone — System Generation (11M) 2-17
  RL01/02 kit
    1600 bpi tape kit
      on-line — System Generation (11M) 2-41
      stand-alone — System Generation (11M) 2-20
    800 bpi tape kit
      on-line — System Generation (11M) 2-43
      stand-alone — System Generation (11M) 2-24
    disk kit
      on-line — System Generation (11M) 2-45
      stand-alone — System Generation (11M) 2-28
  RM02/03/05/80, RP07 tape kit
    on-line — System Generation (11M) 2-32
    stand-alone — System Generation (11M) 2-6
  RP04/05/06 tape kit
    on-line — System Generation (11M) 2-32
    stand-alone — System Generation (11M) 2-6
  target system disk
    mapped — System Generation (11M) 6-9
    unmapped — System Generation (11M) 6-19
COPY command — EDT Editor 2-35, 7-3; Introduction 3-7; Command Language 4-37 to 4-41, 9-8
  DCL — Program Development 4-3
  EDT — Introduction 2-10 to 2-11
COPY key — Command Language 3-14
Copying
  text
    EDT — Introduction 2-10 to 2-11
CORAL 66 command — Command Language 9-9
CORAL command — Command Language 6-32 to 6-39
CORIMG.SYS file — Command Language 5-11, 5-65, 5-74
$COSEP
  predefined syntax element in
    MML — System Management 12-44
$COTB (Octal to binary) — System Library 4-5
Cotree — Task Builder 3-30
  and main tree
    virtual address space — Task Builder 3-39

Cotree (Cont.)
  global symbol resolution — Task Builder 3-17
  null root — Task Builder 3-30
  ODL statement
    from allocation diagram — Task Builder 3-38 to 3-39
  overlay — Task Builder 3-33 to 3-34
  segment
    affecting symbol search on — Task Builder 10-19
  segment loading — Task Builder 4-2
Counter
  location
    definition — Task Builder A-17
    modification — Task Builder A-18
COUNTER argument — PDP-11 MACRO-11 8-11
/CP switch — Task Builder 10-10
/CPB — Crash Dump Analyzer 2-1
CPB
  address in UCB — Writing I/O Driver 4-25
/CPR subkeyword
  CLI command — MCR Operations 3-36
CPU — Introduction 5-2, 5-4, 5-6 to 5-8, 5-10, Gloss-8
CPU-level
  dispatching module — Error Logging 4-11
    DSP5M1 — Error Logging 4-19
/CR switch — PDP-11 MACRO-11 8-7; Task Builder 10-11 to 10-13
  CRF utility — Utilities B-1
  LBR utility — Utilities 10-12
CR11 — I/O Drivers 11-1
Crash — Introduction 1-22, Gloss-8
Crash causes
  halt instruction — Crash Dump Analyzer 1-2
  infinite loop — Crash Dump Analyzer 1-2
  processor trap — Crash Dump Analyzer 1-2
  restart procedure — Crash Dump Analyzer 1-2
Crash dump
  analysis — System Generation (11M) 4-44
  CDA support — System Generation (11M) 4-44
  device — System Generation (11M) 4-44
  PANIC — System Generation (11M) 4-44
    device — System Generation (11M) 4-45
Crash dump analysis
  See Crash dump
Crash Dump Analyzer
  See CDA
Crash dump device — Crash Dump Analyzer 1-1
Crash Dump Routine — Crash Dump Analyzer 1-1
Crash notification device — Crash Dump Analyzer 1-1
CRASH statement — Error Logging 5-41
$CRAVL — Crash Dump Analyzer 3-15
$CRAVL symbol
  use of
    in fault tracing — Writing I/O Driver 3-28
CRAW$ — Executive 5-36 to 5-39
CRE argument to ORG$ macro — RMS-11 Macros 2-3
/CRE keyword
  FLA command — MCR Operations 3-55
Create Address Window directive — Executive 5-36
CREATE command — Introduction 2-2, 2-5, 2-16; Command Language 4-10 to 4-11, 9-10
  RMSDES utility — RMS-11 Utilities 2-7, 2-18, 2-28, 2-31
    defining areas by default — RMS-11 Utilities 2-44
    defining areas explicitly — RMS-11 Utilities 2-43
    INDEX_AREA attribute — RMS-11 Utilities 2-41

CREATE command
  RMSDES utility (Cont.)
    key numbering — RMS-11 Utilities 2-38
    LEVEL1_INDEX_AREA attribute — RMS-11 Utilities 2-41
    setting attributes — RMS-11 Utilities 2-21
    with GET — RMS-11 Utilities 2-10, 2-25
Create Group Global Event Flags — Executive 5-40
$CREATE macro — RMS-11 Macros 5-9
CREATE operation — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-18; RMS-11 Macros 3-7
  and shared access — RMS-11 User's Guide 2-6
  BDB requirement — RMS-11 Macros 2-8
  $CREATE macro — RMS-11 Macros 5-9
  declaring with ORG$ macro — RMS-11 Macros 2-3
  file versions — RMS-11 User's Guide A-3
  I/O buffer requirement — RMS-11 Macros 2-7
  IFAB requirement — RMS-11 Macros 2-5
  remote access — RMS-11 User's Guide B-2 to B-3
  wildcard loop — RMS-11 Macros 3-10
Create option
  ACNT — System Management 2-2
Create Region directive — Executive 5-42
CREATE/DIRECTORY command — Command Language 4-11 to 4-13, 9-10
/CREATED qualifier
  BRU utility — Utilities 7-14
Creating
  file — Introduction 2-1, 2-16
  macro library — Program Development 6-1 to 6-3
  object library — Program Development 6-4 to 6-6
  object module
    FORTRAN IV — Program Development 7-5
    MACRO-11 — Program Development 3-4 to 3-6
  source file
    FORTRAN IV — Program Development 7-2 to 7-3
    MACRO-11 — Program Development 2-12
    skeleton — Program Development 2-12
  task image — Program Development 1-6, 4-1 to 4-2, 7-5 to 7-6
Creating files — I/O Operations 3-4, 3-7; EDT Editor 2-20, 4-1; RMS-11 User's Guide 1-10, 1-12
  See also Data file (RMSDES)
  RMSDEF utility — RMS-11 Utilities A-19
Creation date
  See also CDT field in DAT block
  RMSBCK utility — RMS-11 Utilities 6-8
CREF processor — PDP-11 MACRO-11 8-16
CRF symbolic argument — PDP-11 MACRO-11 6-19
CRF task — PDP-11 MACRO-11 8-16
CRF utility — Program Development 1-8
  assembly cross-reference — Program Development 3-7 to 3-8
  data processing — Utilities B-1
  error message — Utilities B-5
  global cross-reference — Program Development 4-5 to 4-6
  MACRO-11/Task Builder — Utilities B-1
  SEND packet — Utilities B-4
  switch — Utilities B-1
  symbol table file — Utilities B-3
CRGF$ — Executive 5-40
.CROSS directive — PDP-11 MACRO-11 6-21 to 6-22
Cross-reference
  global
    of overlaid task — Task Builder 4-12 to 4-14
  listing

Cross-reference
  listing (Cont.)
    specifying a — Task Builder 10-11
Cross-reference directive — PDP-11 MACRO-11 6-21 to 6-22
Cross-reference listing — PDP-11 MACRO-11 3-12
  assembly — Program Development 3-7 to 3-8
  asterisk in — PDP-11 MACRO-11 8-17
  controlling output in — PDP-11 MACRO-11 6-19
  equal sign in — PDP-11 MACRO-11 8-17
  generating — PDP-11 MACRO-11 8-16 to 8-17
  global — Program Development 4-5 to 4-6
  number sign in — PDP-11 MACRO-11 8-17
Cross-Reference Processor
  See CRF utility
/CROSS_REFERENCE qualifier — PDP-11 MACRO-11 8-8
$CRPKT — Error Logging 4-23
CRRG$ — Executive 5-42
/CRT keyword
  SET command — MCR Operations 3-174
    VMR — System Management 10-48
/CS switch
  PAT utility — Utilities 14-6
  SLP utility — Utilities 13-15
.CSECT directive — PDP-11 MACRO-11 3-11, 6-46
$CSEP
  predefined syntax element in
      MML — System Management 12-44
CSI — I/O Operations 6-1, 6-13 to 6-14, 6-18, 6-20 to 6-27, 6-29
  changes to — Release Notes 1-34
  numeric conversion — I/O Operations 6-28
CSI Control block — I/O Operations 6-14 to 6-17
CSI Run-time macro call — I/O Operations 6-18
CSI$ — I/O Operations 6-14
CSI$1 — I/O Operations 6-18 to 6-19
CSI$2 — I/O Operations 6-18 to 6-21
CSR
  address in SCB — Writing I/O Driver 4-22
  altering using CNF — System Generation (11M) 2-4
  definition — System Generation (11M) 1-4
  floating — System Generation (11M) E-3
/CSR switch
  BAD utility — Utilities 6-8
  DSC utility — Utilities 8-21
CSRQ$ — Executive 5-51
%CTL — Error Logging 5-21
/CTL — Crash Dump Analyzer 2-2
.CTRL — I/O Operations 4-25, 5-6
CTRL key — Command Language 3-18
CTRL/A — EDT Editor 5-53
CTRL/C — EDT Editor 5-54
  Introduction 1-3 to 1-4, 1-7 to 1-8, 1-21
  Command Language 3-2, 3-12, 3-18
  I/O Drivers 3-20
  MCR — MCR Operations 1-3, 2-16
  ODT — ODT 1-5
CTRL/C command — Program Development 1-2
  IOX — System Management 4-30
CTRL/D — EDT Editor 5-53
CTRL/E — EDT Editor 5-53
CTRL/G — Command Language 3-22
CTRL/I — Command Language 3-22
  I/O Drivers 3-20
  MCR — MCR Operations 2-16
CTRL/J — I/O Drivers 3-20

CTRL/K — EDT Editor 5-54, 10-1
Command Language 3-22
I/O Drivers 3-20
  canceling operation of — EDT Editor 10-5
  description — EDT Editor 10-5
  example — EDT Editor 10-6
  MCR — MCR Operations 2-16
CTRL/L — Command Language 3-22
I/O Drivers 3-20
  MCR — MCR Operations 2-16
CTRL/M — Command Language 3-22
I/O Drivers 3-20
CTRL/O — Introduction 1-16 to 1-17
Command Language 3-18, 3-20
I/O Drivers 2-13, 3-21
  MCR — MCR Operations 2-16
CTRL/O command — Program Development 3-7
CTRL/Q — EDT Editor 2-28
Introduction 1-16
Command Language 3-14, 3-19
I/O Drivers 3-21
  MCR — MCR Operations 2-17
CTRL/Q command — Program Development 3-7
CTRL/R — Introduction 1-10, 2-2
Command Language 3-21
I/O Drivers 3-21
  MCR — MCR Operations 2-17
CTRL/S — EDT Editor 2-28
Introduction 1-16
Command Language 3-14, 3-19
I/O Drivers 3-21
  MCR — MCR Operations 2-17
CTRL/S command — Program Development 3-7
CTRL/T — EDT Editor 5-53
CTRL/U — EDT Editor 5-30, 5-48
Introduction 1-10, 2-2
Command Language 3-20 to 3-21
I/O Drivers 3-21
  MCR — MCR Operations 2-17
  ODT — ODT 2-8
CTRL/U command — Program Development 5-3
CTRL/W — EDT Editor 5-8
CTRL/X — Command Language 3-21
  MCR — MCR Operations 2-18
CTRL/Z — EDT Editor 2-19, 2-22, 5-8, 8-13
Introduction 1-4, 1-11, 2-2, 2-4 to 2-5, 2-9, 2-16, 5-10
Command Language 3-12, 3-18, 3-20
I/O Drivers 3-21
  effect on Task Builder — Task Builder 11-4
  MCR — MCR Operations 2-18
  RMSBCK utility — RMS-11 Utilities 6-2
  RMSCNV utility — RMS-11 Utilities 4-4
    file terminator — RMS-11 Utilities 4-8
  RMSDEF utility — RMS-11 Utilities A-5
  RMSDES utility — RMS-11 Utilities 2-2, 2-9, 2-18
  RMSDSP utility — RMS-11 Utilities 5-2
  RMSIFL utility — RMS-11 Utilities 3-2
  RMSRST utility — RMS-11 Utilities 7-2
CTX field in FAB — RMS-11 Macros 2-18
  offset — RMS-11 Macros 6-22
  summary — RMS-11 Macros 6-32
CTX field in RAB — RMS-11 Macros 2-18
  offset — RMS-11 Macros 6-115
  summary — RMS-11 Macros 6-119

$CUIC
  predefined syntax element in MML — System Management 12-45
Current location
  indicator (.) — ODT 2-3, 2-5, 7-3
Current location counter — PDP-11 MACRO-11 2-2, 3-12 to 3-13, 3-15, 3-17, 6-11, 6-37, 6-43
  example usage — PDP-11 MACRO-11 3-14
  indicator for — PDP-11 MACRO-11 3-2
Current task
  priority — Crash Dump Analyzer 3-20
Current-record context — RMS-11 Macros 4-3
  See also Context
Cursor — Introduction 1-4, 2-5, Gloss-8
  movement in keypad editing — EDT Editor 2-9, 5-12 to 5-21
  movement in nokeypad editing — EDT Editor 2-37, 8-13
  ODT — ODT 4-1
  setting range of — EDT Editor 9-3
  showing range of — EDT Editor 9-16
  using arrow keys and — EDT Editor 2-12
Cursor control — I/O Drivers 2-39, 3-33
Cursor-control key — Command Language 3-17
Customizing EDT
  by redefining key — EDT Editor 10-1
  CTRL/K — EDT Editor 5-54
  DEFINE KEY command — EDT Editor 7-4
  DEFINE MACRO command — EDT Editor 7-4
  SET and SHOW command — EDT Editor 9-1
  startup command file — EDT Editor 1-5, 4-9
CUT command — EDT Editor 8-7
CUT function — EDT Editor 2-12, 5-33
  example with SELECT and PASTE — EDT Editor 5-35
  reverse — EDT Editor 5-37
CUTSEN command — EDT Editor 2-43
$CVLOK (Page lock) — System Library 8-22
$CVRL (Virtual to real address) — System Library 8-24
$CVTUC (Upper case text) — System Library 6-1
Cylinder — RMS-11 Introduction 2-1
  See also Placement control

D

D command — EDT Editor 2-40, 8-9; ODT 2-8
D error — PDP-11 MACRO-11 2-3
  summary — PDP-11 MACRO-11 D-3
^D operator — PDP-11 MACRO-11 3-5, 6-32
D register — ODT 2-7, 5-4, 6-2
D symbolic argument — PDP-11 MACRO-11 6-41
D$$BUG label — Writing I/O Driver 3-19
/DA switch — Error Logging 3-5, 3-8; Task Builder 10-14
DAN field in KEY block
  CREATE operation — RMS-11 Macros 5-19
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-67
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-71
DAP (data access protocol)
  See DECnet
DAPRES
  remote access code — RMS-11 User's Guide B-1
  remote access support — RMS-11 User's Guide 8-7
$DAT (Date conversion) — System Library 6-2
DAT block — RMS-11 Introduction 4-8
  chaining to FAB — RMS-11 Macros 2-12 to 2-13
  declaring — RMS-11 Macros 2-8

DAT block (Cont.)
  initializing — RMS-11 Macros 2-9
  summary — RMS-11 Macros 6-14
Data — Introduction 4-9, Gloss-8
  segment
    autoloadable — Task Builder 4-7
  structure
    building a — Task Builder 2-1
    overlay of a — Task Builder 3-19
Data access protocol (DAP)
  See DECnet
Data area number
  See DAN field in KEY block
Data base — Introduction 5-2
  driver
    accessing shared — Writing I/O Driver 2-9
    changing — Writing I/O Driver 3-3
    controlling access to shared — Writing I/O Driver 2-10
    example — Writing I/O Driver 6-2 to 6-4
    loadable
      See Loadable data base
    overview — Writing I/O Driver 3-5
    resident
      See Resident data base
  overlay — Task Builder B-15
    I- and D-space task — Task Builder B-16
Data block
  local — Program Development 2-8
.DATA directive — MCR Operations 4-29
  example — MCR Operations 4-30
  format — MCR Operations 4-30
Data file
  RMSDES utility — RMS-11 Utilities 2-3, 2-17, 2-24
    creating — RMS-11 Utilities 2-3, 2-7, 2-28
    GET command — RMS-11 Utilities 2-10
Data format
  card reader — I/O Drivers 11-9
  input
    Task Builder — Task Builder A-1
Data integrity checking
  RMSBCK utility — RMS-11 Utilities 6-6 to 6-7, 6-9
  RMSRST utility — RMS-11 Utilities 7-6, 7-8, 7-11
Data mode — MCR Operations 4-32
Data record — RMS-11 Introduction 3-7
  RMS-11 User's Guide 5-2
Data sharing — PDP-11 MACRO-11 6-45
Data space — ODT 7-2
  command — ODT 2-8
    access — ODT 2-8
  enable — ODT 1-3
Data storage — RMS-11 Introduction 2-1
  and file organization — RMS-11 User's Guide 2-5
  control in assembly language — Program Development 1-4 to 1-5
  directive — Program Development 1-4 to 1-5
  MACRO-11 definition — Program Development 2-8
  program section — Program Development 2-8
Data storage directive — PDP-11 MACRO-11 6-23 to 6-39
Data structure — Writing I/O Driver 2-7
  macro definition
  See also System data structure
      macro definition
  ACP interface — Writing I/O Driver D-7
  DH11 terminal multiplexer — Writing I/O Driver 2-7
  figure — Writing I/O Driver 2-19
  interaction with driver — Writing I/O Driver 2-5
  interrelationship — Writing I/O Driver 2-18
  overview — Writing I/O Driver 4-1

Data structure (Cont.)
  RL11 disk — Writing I/O Driver 2-8
  summary — Writing I/O Driver 2-20
  user — Executive 3-10
Data transfer
  BRU utility — Utilities 7-26
  DSC utility — Utilities 8-24
  FLX utility — Utilities 4-1
Data type
  key values — RMS-11 Introduction 3-7
  keys — RMS-11 User's Guide 6-3
    and segmenting — RMS-11 User's Guide 6-7
    4-byte signed integer — RMS-11 User's Guide 6-4
    2-byte unsigned binary — RMS-11 User's Guide 6-5
    4-byte unsigned binary — RMS-11 User's Guide 6-5
    2-byte-signed integer — RMS-11 User's Guide 6-4
    packed decimal — RMS-11 User's Guide 6-6
    string — RMS-11 User's Guide 6-3
DATA_AREA
  RMSDES utility — RMS-11 Utilities 2-40
DATA_FILL
  RMSDES utility — RMS-11 Utilities 2-40
Dataset descriptor — I/O Operations 1-10, 2-27 to 2-28, 3-15
  definition of — I/O Operations 1-11
  parameter to FDOP$A — I/O Operations 2-13
Dataset-descriptor pointer
  definition of — I/O Operations 1-11
$DATE
  predefined syntax element in MML — System Management 12-42
Date
  See also DAT block
  displaying — MCR Operations 3-217; System Management 10-72
  setting — MCR Operations 3-217; System Management 10-72
  system — Command Language 2-1, 8-1 to 8-2, 9-31, 9-37
  XAB
    See DAT block
Date conversion
  date ($DAT) — System Library 6-2
Date format
  DCL — Command Language 1-8
Date switch — Error Logging 3-5, 3-8
$DATE1
  predefined syntax element in MML — System Management 12-42
<DATE> symbol — MCR Operations 4-13
/DB switch
  SLP utility — Utilities 13-15
DBMS-11 — System Generation (11M) 4-22
DBS field in KEY block
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-68
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-72
$$DBTS
  reserved PSECT name — Task Builder E-2
/DC switch
  DMP utility — Utilities 11-5
/DCB — Crash Dump Analyzer 2-2
DCB
  description — Writing I/O Driver 4-7
  relationship of
    with I/O control blocks — Writing I/O Driver 2-6

DCB (Cont.)
  required field — Writing I/O Driver 3-6
  role of
    in I/O data structure — Writing I/O Driver 2-20
  with ACP — Writing I/O Driver D-9
DCB field
  D.DSP — Writing I/O Driver 3-6, 4-10, 4-14
  D.LNK — Writing I/O Driver 3-6, 3-8, 4-8
  D.MSK — Writing I/O Driver 3-6, 4-11
  D.NAM — Writing I/O Driver 3-6, 4-9
  D.PCB — Writing I/O Driver 3-6, 4-14
  D.UCB — Writing I/O Driver 3-6, 3-8, 4-8
  D.UCBL — Writing I/O Driver 3-6, 4-9
  D.UNIT — Writing I/O Driver 3-6, 4-9
DCBDF$ — Crash Dump Analyzer B-6
DCL — EDT Editor 2-2, 4-2
  Introduction 1-5, 1-8, 4-1, 5-11, Gloss-8
  System Generation (11M) 4-60
  Command Language 1-1 to 1-2, B-1
  Program Development 1-1 to 1-3
  System Management 7-1, 7-12 to 7-13, 11-2, 11-5, 11-8, 12-1
  RMS-11 User's Guide B-2
  adding commands — System Management 12-7, 12-9 to 12-11
  ANSI file name — Command Language 1-10
  colon (:) — Command Language 1-9
  command
    definition — System Management 12-9
    issuing — MCR Operations 3-43
    tables — System Management 12-6, 12-46 to 12-47
  command line — EDT Editor 4-2 to 4-4
  Command Language 1-2
  comments — Command Language 1-11
  dates — Command Language 1-8
  DECnet — Command Language 1-10
  definition — Batch and Queue Gloss-2
  deleting commands — System Management 12-12
  equal sign (=) — Command Language 1-9
  errors — Command Language 1-13
  installation — System Management 12-1 to 12-3
  line continuation — Command Language 1-11, 3-12
  linking
    debugger — ODT 8-1
    ODT — ODT 1-3
    ODTID — ODT 1-4
    supervisor libraries — ODT 1-4
  mapping to MCR — System Management 12-20 to 12-25, 12-34
  master command table — System Management 12-6 to 12-12, 12-17 to 12-20, 12-46 to 12-47
  modifying commands — System Management 12-12
  number
    decimal — Command Language 1-8
    octal — Command Language 1-8
  operations — System Management 12-4 to 12-5
  parameter — Command Language 1-8
  parser table — System Management 12-6 to 12-12, 12-17 to 12-20, 12-46 to 12-47
  qualifier — Command Language 1-3 to 1-5
  Restriction as Catch-All Task — Release Notes 1-28
  RSX-11M/M-PLUS — Command Language 1-19

DCL (Cont.)
  short forms — Command Language 1-7 to 1-8, 9-1
  source module
    updating — Release Notes 1-46
  SYSGEN — System Management 12-2
  taskbuilding — System Management 12-4
  terminal
    specifying — MCR Operations 3-175
  translator table — System Management 12-6 to 12-12, 12-17 to 12-20, 12-46 to 12-47
  underscore (_) — Command Language 1-9
  using
    suppress messages from QMG — Release Notes 1-36
  VAX/VMS — Command Language 1-19
DCL command — Command Language 1-7
  — MCR Operations 3-43
  command line format — MCR Operations 3-43
  example — MCR Operations 3-43
/DCL keyword
  HELP command — MCR Operations 3-65
  SET command — MCR Operations 3-175
/DD switch
  PIP utility — Utilities 3-16
.DD2CT (Decimal to binary double-word) — System Library 4-1
$DDIV (Double-precision divide) — System Library 3-3
$DDR
  predefined syntax element in MML — System Management 12-43
DDT
  See also Driver Dispatch Table
  address — Writing I/O Driver 3-5
  role of
    in I/O data structure — Writing I/O Driver 2-20
/DE switch — Error Logging 3-5, 3-8
  FLX utility — Utilities 4-7
  Indirect — MCR Operations 4-19
  LBR utility — Utilities 10-13
  PIP utility — Utilities 3-17
  PRI command — Batch and Queue 2-6
  RMSIFL utility — RMS-11 Utilities 3-7, 3-10, 3-14
  VFY utility — Utilities 9-4
DEA command — MCR Operations 3-44
$DEACB routine — Writing I/O Driver 5-6
DEALLOCATE command — Command Language 5-24 to 5-25, 9-10
  — MCR Operations 3-44
  command line format — MCR Operations 3-44
  example — MCR Operations 3-44
DEASSIGN command — Command Language 5-19 to 5-21, 9-11
DEASSIGN/QUEUE command — Command Language 9-11
  DCL — System Management 7-22
DEBUG command — Command Language 9-11
  RSX-11M-PLUS — ODT 1-5
Debug routine — I/O Operations 7-6 to 7-7, 7-11
Debugger
  specifying to Task Builder — ODT 8-1
Debugging
  CDA — Writing I/O Driver 3-20
  Executive stack and register dump routine — Writing I/O Driver 3-16
  fault code — Writing I/O Driver 3-26
  fault isolation — Writing I/O Driver 3-20 to 3-23
  fault tracing — Writing I/O Driver 3-23 to 3-28

Debugging (Cont.)
  introduction — Program Development 1-6 to 1-7
  MACRO-11 source file — Program Development 3-3 to 3-4
  Panic Dump routine — Writing I/O Driver 3-19 to 3-20
  privileged task — ODT 1-4
  session
    abort — ODT 1-5
    begin — ODT 1-4, 3-1
    end — ODT 1-4
    interrupting of — ODT 1-5, 3-2
    resuming — ODT 1-5 to 1-6
  supervisor mode — ODT 1-4
  task — Program Development 4-9, 5-1 to 5-2, 7-7 to 7-9
  tool
    See ODT
  using map — Program Development 5-2, 5-8
  XDT — Writing I/O Driver 3-15, 3-17 to 3-18
Debugging aid — Writing I/O Driver 3-16
  including a — Task Builder 10-14
.DEC directive — MCR Operations 4-30
  example — MCR Operations 4-30
  format — MCR Operations 4-30
DEC Standard Editor
  See EDT editor
Decimal conversion
  decimal to binary ($CDTB) — System Library 4-4
  decimal to binary double-word (.DD2CT) — System Library 4-1
Decimal mode — MCR Operations 4-32
Decimal number — Introduction 3-2, Gloss-9
  packing — PDP-11 MACRO-11 6-31
DECL$S — Executive 5-52
Declaration flag byte
  symbol — Task Builder A-7
Declare Significant Event directive — Executive 5-52
DECLARE statement — Error Logging 5-26 to 5-27
DECnet — Introduction 5-3, Gloss-9; RMS-11 User's Guide 8-6 to 8-8, B-1
  See also Communications products
  and CREATE operations — RMS-11 User's Guide B-2 to B-3
  and ENTER operations — RMS-11 User's Guide B-1
  and ERASE operations — RMS-11 User's Guide B-2
  and file organization — RMS-11 User's Guide B-3
  and OPEN operations — RMS-11 User's Guide B-2 to B-3
  and PARSE operations — RMS-11 User's Guide B-1
  and REMOVE operations — RMS-11 User's Guide B-1
  and RENAME operations — RMS-11 User's Guide B-1
  and SEARCH operations — RMS-11 User's Guide B-1
  block access — RMS-11 User's Guide B-3
  DAPRES resident library — RMS-11 User's Guide B-1
  DCL — Command Language 1-10
  disk-resident overlaid code — RMS-11 User's Guide B-1
  FALs
    on different systems — RMS-11 User's Guide B-3
  file specification — RMS-11 User's Guide B-2
    default — RMS-11 User's Guide B-2
    node — RMS-11 User's Guide B-2
    quoted string — RMS-11 User's Guide B-2
  I/O buffers — RMS-11 User's Guide B-3
    indexed files — RMS-11 User's Guide B-3
    relative files — RMS-11 User's Guide B-3
    sequential files — RMS-11 User's Guide B-3

DECnet (Cont.)
  limitations on functions — RMS-11 User's Guide B-1
  node name
    displayed by SHUTUP — System Management 8-2
  SYSGEN support — System Generation (11M) 4-33
  UIC
    specifying — MCR Operations 3-189
    System Management 10-53
DECnet Remote Terminal Facility
  See RMT
DECnet-11
  down-line loading system image — System Generation (11S) 4-14
  installing task — System Generation (11S) 4-14
DECODE statement — Error Logging 5-32
DECprinter — I/O Drivers 2-4
  LA180 — I/O Drivers 10-2
DECREMENT statement — Error Logging 5-31
DECscope — Command Language 3-1
  See VT52, VT100
DECtape — Command Language 5-4
    I/O Drivers 6-1
    RMS-11 Macros 3-1, 5-20, 5-37, 5-42, 5-77, 5-88, 5-104, 5-111, 5-117
  device-specific QIO — I/O Drivers 6-3
  exercising
    IOX — System Management 4-3
  Files-11
    initializing — MCR Operations 3-76
  recovery procedure — I/O Drivers 6-6
  reversing direction — I/O Drivers 6-7
  select recovery — I/O Drivers 6-7
  standard QIO — I/O Drivers 6-2
  status return — I/O Drivers 6-4 to 6-6
DECTAPE II — RMS-11 Macros 3-1, 5-20, 5-37, 5-42, 5-77, 5-88, 5-104, 5-111, 5-117
  See TU58
DECwriter
  See LA36
DECwriter II — Command Language 3-1
DEF$SZ argument — RMS-11 Macros C-1
<DEFAUL> symbol — MCR Operations 4-8
Default — Introduction 1-15 to 1-16, 2-2, 3-11 to 3-12, Gloss-9
    RMS-11 User's Guide 2-2
  compilers — RMS-11 User's Guide 2-2
  DEQ — RMS-11 User's Guide 4-4
  device — Introduction 1-15
  file specification — RMS-11 User's Guide A-6, B-2
  file type
    MACRO-11 — Program Development 3-5
    TKB — Program Development 4-1
  operating system — RMS-11 User's Guide 2-2
    DEQ — RMS-11 User's Guide 3-5
  RMS-11 — RMS-11 User's Guide 2-2
  RMSDES utility — RMS-11 Utilities 2-21
  system library search
    MACRO-11 — Program Development 1-5, 1-10, 2-7
    TKB — Program Development 1-11, 4-2
  transfer (starting) address — Program Development 4-8
Default buffer count
  changing — I/O Operations 2-20
Default buffer size — I/O Operations 2-41
  overriding — I/O Operations 1-8

Default device — Command Language 2-4, 4-2 to 4-3, 4-77 to 4-79, 5-72 to 5-73, 9-31
Default directory
  inserting — I/O Operations 4-17
Default extend size — I/O Operations 2-19
  establishing — I/O Operations 2-8.
  volume — I/O Operations 2-8
Default extension quantity
  See also DEQ
  RMSDEF utility — RMS-11 Utilities A-15
Default extension size
  See DEQ field in ALL block
  See DEQ field in FAB
Default file name
  parameter to NMBLK$ — I/O Operations 2-31
Default file name block — I/O Operations 1-10, 2-27, 2-30, 3-4, 3-15
  definition of — I/O Operations 1-11
  initializing directly — I/O Operations 2-32
  parameter to FDOP$A — I/O Operations 2-14
Default file name block label
  parameter to NMBLK$ — I/O Operations 2-31
Default file protection — I/O Operations 4-4 to 4-5
  reading — I/O Operations 4-5
  word format — I/O Operations 4-5
  writing — I/O Operations 4-5
Default file type
  parameter to NMBLK$ — I/O Operations 2-31
Default file version number
  parameter to NMBLK$ — I/O Operations 2-31
Default fill character — Error Logging 5-6
Default name of device
  parameter to NMBLK$ — I/O Operations 2-31
Default of switch
  modifying — Task Builder F-7 to F-11
Default print field width — Error Logging 5-6
Default radix — Error Logging 5-6
  PDP-11 MACRO-11 3-14
Default register definition — PDP-11 MACRO-11 3-10
Default response
  examples — System Generation (11M) 3-6
Default string
  See DNA field in FAB
Default UFD — Command Language 4-3, 4-77 to 4-79, 5-72, 9-31
Default UIC — I/O Operations 4-4
  reading — I/O Operations 4-4
  writing — I/O Operations 4-4
Deferred address mode
  autodecrement — PDP-11 MACRO-11 5-5
  autoincrement — PDP-11 MACRO-11 5-4
  index — PDP-11 MACRO-11 5-6
  register — PDP-11 MACRO-11 5-3
  relative — PDP-11 MACRO-11 5-9
Deferred addressing indicator — PDP-11 MACRO-11 3-2
Deferred write — RMS-11 User's Guide 2-17, 6-27
  See also FB$DFW mask in FOP field
  and mass insertion — RMS-11 User's Guide 6-29
  indexed files — RMS-11 User's Guide 7-8
  relative files — RMS-11 User's Guide 4-14
  sequential files — RMS-11 User's Guide 3-14
DEFINE command
  EDT — Introduction 2-17, Gloss-9
Define key (DEFK) command — EDT Editor 8-10
DEFINE KEY command — EDT Editor 7-4, 10-2
  definition — EDT Editor 1-9, 10-1

DEFINE KEY command (Cont.)
  example — EDT Editor 10-4
DEFINE MACRO command — EDT Editor 7-4
Defined report string
  DIGITAL — Error Logging 3-20
  user — Error Logging 3-21
Defining key
  description of feature — EDT Editor 1-9
  keypad editing — EDT Editor 5-54, 10-5
  line editing — EDT Editor 7-4, 10-2
  nokeypad editing — EDT Editor 8-10, 10-1
DEFINITIONS argument — PDP-11 MACRO-11 8-11
DEFK command — EDT Editor 8-10, 10-1
DEL argument to ORG$ macro — RMS-11 Macros 2-3
DEL C function — EDT Editor 5-26
DEL EOL function — EDT Editor 2-17, 5-30
/DEL file switch
  QUE /MOD command — Batch and Queue 2-21
DEL L function — EDT Editor 2-15, 5-32
DEL W function — EDT Editor 2-15, 5-28
.DELAY directive — MCR Operations 4-30
  example — MCR Operations 4-31
  format — MCR Operations 4-31
Delaying
  output — Introduction 1-16
DELET$ — I/O Operations 3-38
  format — I/O Operations 3-38
  parameters — I/O Operations 3-38
Delete
  access — MCR Operations 2-3
  mode — MCR Operations 4-32
DELETE & PRINT command
  EDI editor — Utilities 2-14, 2-31
DELETE command — EDT Editor 2-30, 7-6; Introduction 3-9 to 3-11; Command Language 4-31 to 4-34, 9-12
  EDI editor — Utilities 2-13, 2-31
  EDT — Introduction 2-12, 2-14
  example — Batch and Queue 2-11
  format — Batch and Queue 2-10
Delete Directory Entry — I/O Operations 4-16
/DELETE file qualifier
  PRINT command — Batch and Queue 2-6
  SET QUEUE command — Batch and Queue 2-21
DELETE function — EDT Editor 2-14, 5-25
DELETE key — Introduction 1-8 to 1-10, 2-2; Command Language 3-13; MCR Operations 2-15
$DELETE macro — RMS-11 Macros 5-25
DELETE operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15; RMS-11 Macros 4-11
  and key position — RMS-11 User's Guide 6-7
  and shared access — RMS-11 User's Guide 2-6
  compressing records — RMS-11 User's Guide 5-10, 5-16, 6-7, 6-9
  declaring with ORG$ macro — RMS-11 Macros 2-3
  deferred write — RMS-11 User's Guide 7-9
  $DELETE macro — RMS-11 Macros 5-25
  duplicate keys — RMS-11 User's Guide 6-9
  indexed files — RMS-11 User's Guide 5-15, 7-3, 7-9
  optimizing — RMS-11 User's Guide 6-7
  relative files — RMS-11 User's Guide 4-7
Delete option
  ACNT — System Management 2-7

DELETE/ENTRY command — Command Language 9-12
DELETE/JOB command — Command Language 9-12
DELETE/PROCESSOR command — Command Language 9-13
  DCL — System Management 7-20 to 7-22
DELETE/QUEUE command — Command Language 9-13
  DCL — System Management 7-19 to 7-20
Deleting
  all edits — EDT Editor 5-9, 7-14, 8-15
  character — EDT Editor 2-14, 5-26, 8-9
  line — EDT Editor 2-15, 5-30, 7-6, 8-9
  text
    EDT — Introduction 2-12
  word — EDT Editor 2-15, 5-28, 8-9
Deletion, file marked for
  See FB$MKD mask in FOP field
Delimiter — Introduction 2-12; Program Development 2-16
  defining delimiters of entity — EDT Editor 9-4
  mixed — EDT Editor 7-17
  string — EDT Editor 2-30, 7-17
  symbols used as — EDT Editor 2-30
Delimiting character — PDP-11 MACRO-11 3-3
/DENS — Crash Dump Analyzer 2-6
/DENS keyword
  HOME command — MCR Operations 3-71
  INI command — MCR Operations 3-79
  MOUNT command — MCR Operations 3-119
  SAVE command
    VMR — System Management 10-40
/DENS switch
  DMP utility — Utilities 11-5
  DSC utility — Utilities 8-14
Density
  tape
    in IOX — System Management 4-32
DENSITY command
  IOX — System Management 4-32
/DENSITY qualifier
  BRU utility — Utilities 7-14
Density selection
  magnetic tape — I/O Drivers 8-15
/DENSITY switch
  FMT utility — Utilities 5-8
Density switch — Crash Dump Analyzer 2-7
Depth
  indexed files — RMS-11 User's Guide 5-5
DEQ
  default
    indexed files — RMS-11 User's Guide 6-26
    relative files — RMS-11 User's Guide 4-4
    sequential files — RMS-11 User's Guide 3-5
  indexed files — RMS-11 User's Guide 6-26
  relative files — RMS-11 User's Guide 4-4
  sequential files — RMS-11 User's Guide 3-4
DEQ field in ALL block
  CREATE operation — RMS-11 Macros 5-17
  DISPLAY operation — RMS-11 Macros 5-30
  offset — RMS-11 Macros 6-2
  OPEN operation — RMS-11 Macros 5-79
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-11
DEQ field in FAB
  CREATE operation — RMS-11 Macros 5-17
  offset — RMS-11 Macros 6-22
  OPEN operation — RMS-11 Macros 5-74, 5-78
  summary — RMS-11 Macros 6-33

Description file
  RMSDES utility — RMS-11 Utilities 2-3, 2-13, 2-17, 2-24
    EXIT command — RMS-11 Utilities 2-10
    GET command — RMS-11 Utilities 2-10
    SAVE command — RMS-11 Utilities 2-27
Descriptor
  region — Task Builder B-21
  segment — Task Builder B-18
  window — Task Builder B-20 to B-21
DESELECT command
  IOX — System Management 4-34
Design buffer
  RMSDES utility — RMS-11 Utilities 2-1
    using — RMS-11 Utilities 2-16
Design buffer sections (RMSDES)
  See Section
Design session
  RMSDES utility — RMS-11 Utilities 2-1
    resuming — RMS-11 Utilities 2-22
Designing applications — RMS-11 User's Guide 2-1
  considerations — RMS-11 User's Guide 2-3
    ease of design — RMS-11 User's Guide 2-10
    shared access — RMS-11 User's Guide 2-5
    space — RMS-11 User's Guide 2-4, 8-1
    speed — RMS-11 User's Guide 2-3, 8-1
  when to design — RMS-11 User's Guide 2-2
Designing files — RMS-11 Introduction 3-15; RMS-11 User's Guide 1-10, 1-12
  See also Indexed file organization
  See also Relative file organization
  See also Sequential file organization
  indexed — RMS-11 User's Guide 6-1
  relative — RMS-11 User's Guide 4-2
  sequential — RMS-11 User's Guide 3-3
Despool prototype task — System Management 7-1
Despooler
  definition — Batch and Queue Gloss-3
Detach mode — MCR Operations 4-32
Detach Region — Executive 5-56
$DEUMR routine — Writing I/O Driver 5-7, B-3
$DEV
  predefined syntax element in MML — System Management 12-42
/DEV — Crash Dump Analyzer 2-2
DEV command — MCR Operations 3-46
  VMR — System Management 10-16
DEV field in FAB — RMS-11 Macros 3-1 to 3-2
  CREATE operation — RMS-11 Macros 5-20
  ENTER operation — RMS-11 Macros 5-37
  ERASE operation — RMS-11 Macros 5-42 to 5-43
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-77
  PARSE operation — RMS-11 Macros 5-88
  REMOVE operation — RMS-11 Macros 5-104
  RENAME operation — RMS-11 Macros 5-111
  SEARCH operation — RMS-11 Macros 5-117 to 5-118
  summary — RMS-11 Macros 6-34
/DEV keyword
  DISMOUNT command — MCR Operations 3-50
  TAS command — MCR Operations 3-215
$DEVE
  predefined syntax element in MML — System Management 12-42

Development step
  program — Task Builder 1-1
$DEVHD word — Writing I/O Driver 2-19
  role of
    in I/O data structure — Writing I/O Driver 2-20
Device — Introduction 1-6, 1-14, 5-10 to 5-11, Gloss-10; Command Language 5-1, 5-4; MCR Operations 2-9; RMS-11 Introduction 2-1
  See also Medium
  allocating — MCR Operations 3-12
    generic — MCR Operations 3-12
    valid device — MCR Operations 3-13
  and record formats — RMS-11 User's Guide 2-15
  assignment — Task Builder 11-7
  attaching to — I/O Drivers 1-26
  attribute — MCR Operations 4-52
    list of — MCR Operations 4-53
  bootable — MCR Operations 3-23
  buffer size
    specifying — MCR Operations 3-173; System Management 10-48
  characteristics
    See DEV field in FAB
  common — Task Builder 5-29
    building and linking to a — Task Builder 5-26 to 5-31
  controller — Introduction 5-12, Gloss-10
    AD — System Generation (11M) 4-66
    AF — System Generation (11M) 4-66
    AR — System Generation (11M) 4-66
    CR — System Generation (11M) 4-67
    CT — System Generation (11M) 4-67
    DB — System Generation (11M) 4-68
    DD — System Generation (11M) 4-69
    DF — System Generation (11M) 4-69
    DK — System Generation (11M) 4-69
    DL — System Generation (11M) 4-70
    DM — System Generation (11M) 4-70
    DP — System Generation (11M) 4-71
    DR — System Generation (11M) 4-72
    DS — System Generation (11M) 4-73
    DT — System Generation (11M) 4-73
    DU — System Generation (11M) 4-74
    DX — System Generation (11M) 4-76
    DY — System Generation (11M) 4-76
    EM — System Generation (11M) 4-77
    GR — System Generation (11M) 4-77
    LA — System Generation (11M) 4-78
    LP — System Generation (11M) 4-78
    LS — System Generation (11M) 4-80
    MF — System Generation (11M) 4-81
    MM — System Generation (11M) 4-82
    MS — System Generation (11M) 4-83
    MT — System Generation (11M) 4-83
    PP — System Generation (11M) 4-83
    PR — System Generation (11M) 4-84
    UD — System Generation (11M) 4-84
    XB — System Generation (11M) 4-85
    XL — System Generation (11M) 4-85
    XM — System Generation (11M) 4-86
    XP — System Generation (11M) 4-86
    XQ — System Generation (11M) 4-87
    XU — System Generation (11M) 4-87
    XW — System Generation (11M) 4-88
    YH — System Generation (11M) 4-88
    YJ — System Generation (11M) 4-90

Device
  controller (Cont.)
    YL — System Generation (11M) 4-91
    YZ — System Generation (11M) 4-91
  deallocating — MCR Operations 3-44
  default — Introduction 1-15; Command Language 2-4, 4-2 to 4-3, 4-77 to 4-79, 5-72 to 5-73, 9-31
  detaching — I/O Drivers 1-27
  disk — RMS-11 Introduction 2-1; RMS-11 User's Guide 1-12
  dismounting — System Management 8-4
  driver — Introduction 5-4, Gloss-10; RMS-11 Introduction 2-1
    loaded
      testing — MCR Operations 4-41
    loading — MCR Operations 3-105
      pool requirements — MCR Operations 3-107
    unloading — MCR Operations 3-223
  drivers and user tasks — Release Notes 1-31
  example — System Generation (11M) 4-64
  file specification — RMS-11 User's Guide A-1, A-4
  file-structured — Introduction 5-10 to 5-12, Gloss-13; MCR Operations 3-114
  Files-11 — MCR Operations 2-1
  I/O request
    redirecting — MCR Operations 3-144; System Management 10-33
  identifier
    See DVI field in NAM block
  information
    acquiring
      for command file — MCR Operations 4-52
    displaying — MCR Operations 3-46; System Management 10-16
  IOX
    adding
      to be tested — System Management 4-28
    displaying
      those tested — System Management 4-28
    exercising
      steps — System Management 4-2
    status
      during exercise — System Management 4-58
    testing
      removing — System Management 4-34
      time of — System Management 4-55
  load
    OTL — System Generation (11S) 2-6
  logical — System Generation (11M) 4-30; I/O Drivers 1-18
  magnetic tape — RMS-11 Introduction 2-4; RMS-11 User's Guide 1-12
  mass-storage — Introduction 1-13, 3-2, 3-8, 5-6, 5-11, Gloss-21
  name — Introduction 1-14, 1-19, 3-5; MCR Operations 2-9
    logical — MCR Operations 2-11
      assigning — MCR Operations 2-12, 3-16
      syntax — MCR Operations 3-16
    symbolic
      displaying — MCR Operations 3-46
  non-file-structured — MCR Operations 3-114
  null — I/O Drivers 19-1; MCR Operations 2-11

Device (Cont.)
  paging — System Management 10-51
  peripheral — Introduction 5-1, 5-5, 5-10, Gloss-24; Command Language 5-1
  physical — Command Language 5-1 to 5-3, 5-5, 5-8
  private — Introduction 3-12; Command Language 5-9, 5-13, 5-22 to 5-25; MCR Operations 2-12
    releasing — MCR Operations 3-44
    specifying — MCR Operations 2-13, 3-12
  pseudo — Introduction 3-8, Gloss-26; System Generation (11M) C-2; Command Language 5-1 to 5-8; MCR Operations 2-10
    console output — System Management 3-1
    list — MCR Operations 2-10
  public — Command Language 5-9, 5-13, 5-75; MCR Operations 2-12
    specifying — MCR Operations 2-13, 3-192; System Management 10-57
  random access — Command Language 5-3
  record-oriented — Introduction 5-10 to 5-11, Gloss-28; Command Language 5-3
  redirecting — MCR Operations 2-10
  redirection — Command Language 5-16 to 5-18
  restrictions — Release Notes 1-16, 1-35
  sequential — MCR Operations 3-114
  shareable — Command Language 5-9, 5-13
  shared — Command Language 5-13
  specifying — System Generation (11M) 4-16
  specifying parameters — System Generation (11M) 4-64
  status message — System Generation (11S) 2-18
  support on RSX-11M — System Generation (11M) 4-16, C-1
  supported
    BAD utility — Utilities 6-9
    BRU utility — Utilities 7-5
    DSC utility — Utilities 8-4
    FLX utility — Utilities 4-2
    FMT utility — Utilities 5-5
    SIP — System Generation (11S) 2-15
  system
    default — MCR Operations 2-2
    writing hardware boot block — MCR Operations 3-159
  system default
    adding to account entry — System Management 2-3
    changing — System Management 2-5
    contained in account entry — System Management 2-1
    displaying — System Management 2-4
  unit-record — Command Language 5-3; RMS-11 Introduction 3-5; RMS-11 User's Guide 1-18, A-1
  unowned — Command Language 5-9, 5-13; MCR Operations 2-12
    specifying — MCR Operations 2-13
  verifying
    BAD utility — Utilities 6-3
  write checking
    specifying — MCR Operations 3-207; System Management 10-65

Device and unit
  parsing — I/O Operations 4-9, 4-12
Device attributes — Command Language 5-77 to 5-80

DEVICE command
  RMD — System Management 6-12
Device common
  loading — System Generation (11S) 4-13
Device control
  LUN register — ODT 2-7, 5-4, 6-2
Device Control Block
  See DCB
Device controller dump — Crash Dump Analyzer 3-52
  common interrupt address — Crash Dump Analyzer 3-52
  controller request block — Crash Dump Analyzer 3-52
  controller status words — Crash Dump Analyzer 3-52
  controller table — Crash Dump Analyzer 3-52
Device controller switch — Crash Dump Analyzer 2-4
Device driver
  displaying
    information — System Generation (11S) 2-22
  inserting
    into Executive object library — System Generation (11S) 4-5
  loading — System Generation (11S) 4-10; System Management 10-27
  unloading — System Management 10-75
  without error logging — Error Logging 1-3
Device error logging — Error Logging 4-21
Device errors
  error logging — Error Logging 1-6
  hardware register contents — Error Logging 1-6
Device handler
  See Device driver
Device I/O activity — Error Logging 1-1
Device independence — Command Language 5-8
Device information dump
  control processing flags — Crash Dump Analyzer 3-39
  device characteristics word — Crash Dump Analyzer 3-39
  I/O request packet — Crash Dump Analyzer 3-38, 3-42
  terminal status word — Crash Dump Analyzer 3-38
  UCB extension — Crash Dump Analyzer 3-38
Device information table — Error Logging 4-34
  ALTPRINTNAME field — Error Logging 4-35
  DISPNAME field — Error Logging 4-35
  DRIVETYPE field — Error Logging 4-36
  MASSBUSFLAG field — Error Logging 4-36
  MNEMONIC field — Error Logging 4-35
  PRINTNAME field — Error Logging 4-35
  SIZE field — Error Logging 4-36
Device interrupt entry point — Writing I/O Driver 2-4
Device interrupt vector — Writing I/O Driver 4-33
  definition — Writing I/O Driver 2-10
Device module
  EML11 — Error Logging 4-8
  ERK05 — Error Logging 4-8
  ERK67 — Error Logging 4-8
  ERL12 — Error Logging 4-8
  ERM05 — Error Logging 4-8
  ERM23 — Error Logging 4-8
  ERM80 — Error Logging 4-8
  ERP07 — Error Logging 4-8
  ERP23 — Error Logging 4-8
  ERP456 — Error Logging 4-8
  ERS11 — Error Logging 4-9
  ERS34 — Error Logging 4-9
  ERX01 — Error Logging 4-9
  ERX02 — Error Logging 4-9
  ET0310 — Error Logging 4-9
  ET1645 — Error Logging 4-9
  ETA11 — Error Logging 4-9

Device module (Cont.)
  ETC11 Error Logging 4-9
  ETS11 Error Logging 4-9
  ETSV05 Error Logging 4-9
  ETU58 Error Logging 4-9
  ETU77 Error Logging 4-9
  MSCP60 Error Logging 4-9
  MSCP80 Error Logging 4-9
  MSCPAT Error Logging 4-9
  MSCPE Error Logging 4-9
  MSCPEN Error Logging 4-9
  MSCPSD Error Logging 4-9
  MSCPTO Error Logging 4-9
Device name Command Language 5-1
  logical
    assigning System Management 10-9
  physical I/O Drivers 1-18 to 1-20
  symbolic
    displaying System Management 10-16
/DEVICE qualifier
  PRINT command Batch and Queue 2-6
  SHOW QUEUE command Batch and Queue 2-15
Device switch Error Logging 3-5, 3-8
Device time-out entry point Writing I/O Driver 2-4
  DDT conditions Writing I/O Driver 4-11
Device timeout Error Logging 4-20
Device-level module Error Logging 4-11
  adding to system Error Logging 4-25
  addition to device information
      table Error Logging 4-34
  bit-to-text translation Error Logging 4-30
  coroutine Error Logging 4-30
  device data declaration Error Logging 4-26
  device name Error Logging 4-26
  error type Error Logging 4-30
  EUNKWN Error Logging 4-37
  exit Error Logging 4-31
  * flag Error Logging 4-28
  intermodule variable Error Logging 4-29
  local work variable Error Logging 4-29
  MASSBUS Error Logging 4-33 to 4-34
  module statement Error Logging 4-26
  Non-MASSBUS Error Logging 4-33 to 4-34
  notes Error Logging 4-31
  procedure statement Error Logging 4-26
  register definitions Error Logging 4-27
  subpacket statement Error Logging 4-26
Devices
  error logging Error Logging 2-4
    control file module Error Logging 2-4 to 2-5
DEVICES command MCR Operations 3-46
  command line format MCR Operations 3-46
  example MCR Operations 3-46
  keyword
    /LOG MCR Operations 3-46
  VMR System Management 10-16
    command line format System Management 10-16
    example System Management 10-16
DEVSM1 Error Logging 4-7, 4-18, 4-34, 4-36
  SLP Error Logging 4-36
$$DEVT
  reserved PSECT name Task Builder E-2
DEVUDA Error Logging 4-7
DF condition test argument PDP-11 MACRO-11 6-52
/DF switch
  LBR utility Utilities 10-14

/DF switch (Cont.)
  PIP utility — Utilities 3-18
DFIN$G argument — RMS-11 Macros C-1
DFIN$L argument — RMS-11 Macros C-1
DFL field in KEY block
  CREATE operation — RMS-11 Macros 5-20
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-67
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-73
/DG switch
  LBR utility — Utilities 10-15
DH11 — I/O Drivers 2-40, 3-29
  remote — I/O Drivers 3-31
/DI switch
  CMP utility — Utilities 12-3
  FLX utility — Utilities 4-7
Diagnostic function
  user-mode — I/O Drivers 1-30
Diagnostic run
  FORTRAN IV source file — Program Development 7-3 to 7-4
  MACRO-11 source file — Program Development 3-1 to 3-2
Dial-up line — I/O Drivers 2-42
Dialog
  UETP
    example — System Management 9-7
DIC — Executive 1-2
DID field in NAM block
  CREATE operation — RMS-11 Macros 5-10, 5-21
  ENTER operation — RMS-11 Macros 5-36 to 5-37
  ERASE operation — RMS-11 Macros 5-41 to 5-42
  offset — RMS-11 Macros 6-94
  OPEN operation — RMS-11 Macros 5-73, 5-77
  PARSE operation — RMS-11 Macros 5-87
  REMOVE operation — RMS-11 Macros 5-103, 5-105
  RENAME operation — RMS-11 Macros 5-109 to 5-111
  SEARCH operation — RMS-11 Macros 5-116, 5-118
  summary — RMS-11 Macros 6-95
DID field in NAM block field
  RSTS/E — RMS-11 Macros D-4
DIF condition test argument — PDP-11 MACRO-11 6-52
DIFFERENCES command — Command Language 4-69 to 4-75, 9-13
DIGITAL Command Language
  See DCL
DIGITAL COMMAND LANGUAGE command — MCR Operations 3-43
Digital output
  bistable
    multipoint — I/O Drivers 18-18
  multipoint — I/O Drivers 18-17
000000.DIR file — Command Language 5-11, 5-65
DIR macro
  MML — System Management 12-30
DIR$ macro — I/O Drivers 1-16
Direct access
  See Random access
Direct assignment
  operator — PDP-11 MACRO-11 3-1 to 3-2, 3-9
  statement — PDP-11 MACRO-11 3-6 to 3-9, 3-13
Direction
  See ADVANCE or BACKUP
Directive — Introduction Gloss-11
  assembler — Program Development 1-5
    summary — PDP-11 MACRO-11 B-3 to B-8

Directive (Cont.)
  assembler function — PDP-11 MACRO-11 6-18 to 6-22
  Cancel Selective Marktime — System Generation (11M) 4-28
  comment block — PDP-11 MACRO-11 6-18
  conditional assembly — PDP-11 MACRO-11 6-50 to 6-56
  cross-reference — PDP-11 MACRO-11 6-21 to 6-22
  data storage — PDP-11 MACRO-11 6-23 to 6-39
  Executive — Introduction 5-8
  file control — PDP-11 MACRO-11 6-57 to 6-58
  general assembler — PDP-11 MACRO-11 6-1 to 6-3
    summary table — PDP-11 MACRO-11 6-1 to 6-3
  Get Mapping Context — System Generation (11M) 4-25
  immediate conditional assembly — PDP-11 MACRO-11 6-56
  listing control — PDP-11 MACRO-11 6-3 to 6-18
    arguments for — PDP-11 MACRO-11 6-10 to 6-12
  macro — PDP-11 MACRO-11 7-1
    Executive 1-4
  memory management
    in mapping — Task Builder 2-24
  memory management (PLAS) — System Generation (11M) 4-24
  .NAME — Task Builder 3-26
    attributes for — Task Builder 3-27
    example of use — Task Builder 3-27
  ODL — Task Builder 3-22 to 3-23
    .END — Task Builder 3-22
    .FCTR — Task Builder 3-24
    introduction — Task Builder 3-22
    .ROOT — Task Builder 3-22
  processing — Executive 1-2
  program identification — PDP-11 MACRO-11 6-16 to 6-17
  program sectioning — PDP-11 MACRO-11 6-40 to 6-48
  .PSECT — Task Builder 3-28
  rejection — Executive 1-3
  Send/Receive By Reference — System Generation (11M) 4-25
  symbol control — PDP-11 MACRO-11 6-48 to 6-49
  system — System Generation (11M) 4-36
    Program Development 1-9 to 1-10
  terminating — PDP-11 MACRO-11 6-39
  unconditional assembly — PDP-11 MACRO-11 6-53
  use — Program Development 2-3, 2-5 to 2-6
  use of parentheses — Task Builder 3-23
  version number — PDP-11 MACRO-11 6-16 to 6-17
Directive Identification Code
  See DIC
Directive Parameter Block
  See DPB
Directive status code — I/O Operations I-1 to I-12
Directive Status Word
  See DSW
Directive status word
  register — ODT 2-6, 5-3
Directory — Introduction 5-5, 5-12, Gloss-11
  See UFD
  default — RMS-11 User's Guide A-6
  file specification — RMS-11 User's Guide A-1, A-4
  listing — Program Development 3-9
  purging — Program Development 3-9 to 3-10
  wildcard context
    See WDI field in NAM block
  wildcard operation
    See NB$WCH mask in FNB field
DIRECTORY command — Introduction 1-13, 3-1 to 3-3
    Command Language 4-22 to 4-31, 9-14
  DCL — Program Development 3-9
  formats — Introduction 3-5

Directory entry
  creating
    See ENTER operation
  deleting — I/O Operations 4-16
    See also REMOVE operation
  deleting wildcard — I/O Operations 4-16
  inserting — I/O Operations 4-15
  locating — I/O Operations 4-13
  replacing
    See RENAME operation
Directory files — I/O Operations 5-2
Directory Identification
  parsing — I/O Operations 4-10
Directory information
  inserting — I/O Operations 4-16
  parsing — I/O Operations 4-12
Directory operation — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17; RMS-11 Macros 3-5
  See also Operation
Directory operation macro
  declaring — RMS-11 Macros C-2
  $ENTER — RMS-11 Macros 5-35
  $PARSE — RMS-11 Macros 5-86
  $REMOVE — RMS-11 Macros 5-102
  $RENAME — RMS-11 Macros 5-108
  $SEARCH — RMS-11 Macros 5-116
Directory processing — RMS-11 Macros 3-1
/DIRECTORY qualifier
  BRU utility — Utilities 7-15
Directory record
  declare global symbol — Task Builder A-2
  end of global symbol — Task Builder A-11
  global symbol
    end of — Task Builder A-11
  internal symbol — Task Builder A-24
  relocation — Task Builder A-12
Directory string
  reading — I/O Operations 4-2
  writing — I/O Operations 4-2 to 4-3
Directory Structure
  multiuser volume — I/O Operations 5-3
  single-user volume — I/O Operations 5-2
DIRSYM.MAC — Executive 4-3
/DISABLE
  keyword
    CLI command — MCR Operations 3-35
  subkeyword
    CLI command — MCR Operations 3-37
Disable AST Recognition directive — Executive 5-53
Disable Checkpointing directive — Executive 5-55
.DISABLE directive — MCR Operations 4-31
  format — MCR Operations 4-31
  operating mode — MCR Operations 4-31
$DISCONNECT macro — RMS-11 Macros 5-27
DISCONNECT operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
  block stream — RMS-11 Macros 4-14
  $DISCONNECT macro — RMS-11 Macros 5-27
  indexed files — RMS-11 User's Guide 7-3
  record stream — RMS-11 Macros 4-9
  relative files — RMS-11 User's Guide 4-8
  sequential files — RMS-11 User's Guide 3-7

Disk
Introduction Gloss-11
RMS-11 Macros 3-1, 5-20, 5-37, 5-42, 5-77, 5-88, 5-104, 5-111, 5-117
address space
RCT
System Management 5-2
backing up
BRU utility
Utilities 7-1
DSC utility
Utilities 8-1
block
random or sequential
IOX
System Management 4-49
testing range display
IOX
System Management 4-50
testing range for NFS volumes
IOX
System Management 4-50
cartridge
RK05
I/O Drivers 5-3
RK06
I/O Drivers 5-3
RK07
I/O Drivers 5-3
RL02
I/O Drivers 5-3
comparing
DSC utility
Utilities 8-14
compressing
DSC utility
Utilities 8-3
conventional backup
BRU utility
Utilities 7-4
copying
BRU utility
Utilities 7-1
DSC utility
Utilities 8-1
data transfer
DSC utility
Utilities 8-25
device exercise example
an RL02
IOX
System Management 4-9
NFS volume
IOX
System Management 4-14
displaying free space
PIP utility
Utilities 3-23
VFY utility
Utilities 9-5
emulator
ML-11
I/O Drivers 5-4
examining data
DMP utility
Utilities 11-1
exercising
IOX
System Management 4-2
Files-11
directory
accessing
MCR Operations 3-72
home block
modifying
MCR Operations 3-71
initializing
MCR Operations 3-76
parameter commands for
IOX
System Management 4-8
protecting
MCR Operations 3-123
testing for
IOX
System Management 4-63
fixed
RA80
I/O Drivers 5-4
RA81
I/O Drivers 5-4
RD51
I/O Drivers 5-4A
fixed-head
RF11/RS11
I/O Drivers 5-1
RS03
I/O Drivers 5-1
RS04
I/O Drivers 5-1
fixed/removable
RC25
I/O Drivers 5-4A

Disk (Cont.)
  flexible
    RX01 I/O Drivers 5-4
    RX02 I/O Drivers 5-4
    RX50 I/O Drivers 5-4A
  floppy
    density
      checking MCR Operations 3-71
  formatting
    FLX utility Utilities 4-4
    FMT utility Utilities 5-1
  full backup
    BRU utility Utilities 7-3
  geometry I/O Drivers 5-2
  image backup
    BRU utility Utilities 7-4
  initializing
    BRU utility Utilities 7-2, 7-17
  last-track I/O Drivers 5-12
  locating bad block
    BAD utility Utilities 6-1
  mounting
    BRU utility Utilities 7-2
  MSCP
    bad block handling
      RCT System Management 5-3
  pack
    RA60 I/O Drivers 5-4
    RM02 I/O Drivers 5-3
    RM03 I/O Drivers 5-3
    RM05 I/O Drivers 5-3
    RM80 I/O Drivers 5-3
    RP02 I/O Drivers 5-1
    RP03 I/O Drivers 5-1
    RP04 I/O Drivers 5-3
    RP05 I/O Drivers 5-3
    RP06 I/O Drivers 5-3
  power-fail recovery I/O Drivers 1-39
  preparation Command Language 5-10 to 5-11
  private Program Development 1-12
  public Program Development 1-12
  recovering
    lost block
      VFY utility Utilities 9-7
    space
      DSC utility Utilities 8-3
  removable/fixed
    RC25 I/O Drivers 5-4A
  restoring
    BRU utility Utilities 7-1
  scratch Command Language 5-10 to 5-11
  selective backup
    BRU utility Utilities 7-3
  space recovery System Generation (11M) 6-3, 6-14
  status return I/O Drivers 5-8 to 5-11
  swapping interval System Generation (11M) 4-39
    priority System Generation (11M) 4-41
  testing
    selecting random testing
      IOX System Management 4-49
    skipping blocks
      IOX System Management 4-40
  verifying Utilities 9-1
    block
      VFY utility Utilities 9-7
  writecheck support System Generation (11M) 4-31

Disk controller
  UDA50 — I/O Drivers 5-4
Disk device
  See also Medium
  drive — RMS-11 Introduction 2-1
  structure — RMS-11 Introduction 2-1
    cylinder — RMS-11 Introduction 2-1
    platter — RMS-11 Introduction 2-1
    sector — RMS-11 Introduction 2-1
    track — RMS-11 Introduction 2-1
Disk image — Task Builder 2-8 to 2-9
Disk Save and Compress Utility
  See DSC utility
Disk versus tape — Introduction 5-12
Disk Volume Formatter Utility
  See FMT utility
Disk-resident
  overlay — Task Builder 3-1 to 3-2; RMS-11 User's Guide 1-13, 8-3, 8-8 to 8-9
    loading — Task Builder 4-1
    remote access code — RMS-11 User's Guide B-1
  overlay structure — Task Builder 3-2
DISMOUNT command — Command Language 5-9, 5-11 to 5-12, 5-38, 5-42 to 5-46, 9-14; MCR Operations 3-49
  command line format — MCR Operations 3-49
  error message — MCR Operations 3-51
  example — MCR Operations 3-51
  keyword
    /DEV — MCR Operations 3-50
    /LOCK — MCR Operations 3-50
    /USER — MCR Operations 3-50
Dispatch module — Error Logging 4-3, 4-11
  subpacket definition — Error Logging 4-69 to 4-71
Dispatch module path
  brief report — Error Logging 4-15
  full report — Error Logging 4-15
  no report — Error Logging 4-15
  register report — Error Logging 4-15
Dispatch procedure — Error Logging 4-10
Dispatching
  event-level — Error Logging 4-16
Displaced relocation
  internal — Task Builder A-15
Display
  IOX
    bad blocks list — System Management 4-25
    commands as a category — System Management 4-3
    continuing
      with PROCEED — System Management 4-48
  mode — ODT 4-1, 4-3, 4-6, 6-5
Display information (RMSDSP) — RMS-11 Utilities 5-1
  allocation information — RMS-11 Utilities 5-4
  area information — RMS-11 Utilities 5-4
  attributes — RMS-11 Utilities 5-4
  examples — RMS-11 Utilities 5-5
  key information — RMS-11 Utilities 5-4
$DISPLAY macro — RMS-11 Macros 5-29
  RSTS/E — RMS-11 Macros D-4
Display mode — MCR Operations 4-32

DISPLAY operation — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-18; RMS-11 Macros 3-7
  BDB requirement — RMS-11 Macros 2-8
  $DISPLAY macro — RMS-11 Macros 5-29
  I/O buffer requirement — RMS-11 Macros 2-7
  wildcard loop — RMS-11 Macros 3-10
Display program — System Generation (11S) 2-1
  building — System Generation (11S) 4-9
  format — System Generation (11S) 2-22
  RSDV05 — System Generation (11S) 1-1
  RSDV1H — System Generation (11S) 1-1
  size — System Generation (11S) 1-3
/DISPLAY qualifier
  BRU utility — Utilities 7-16
Displaying
  byte location — ODT 4-2 to 4-6
  information — Introduction 1-11, 1-16 to 1-20, 5-9
  location — ODT 4-1
  text
    EDT — Introduction 2-5, 2-7 to 2-8
  word location — ODT 4-2 to 4-6
Displaying attributes (RMSDES)
  See Attribute
Displaying files — RMS-11 User's Guide 1-10, 1-12
Distribution kit
  contents — System Generation (11S) 3-1
  definition — System Generation (11M) 2-1
  directory listing
    big disk — System Generation (11M) F-1
    RK06/07
      CLISRC — System Generation (11M) F-39
      RSXM35 — System Generation (11M) F-29
    R101/02
      EXCPRV — System Generation (11M) F-65
      HLPDCL — System Generation (11M) F-82
      MCRSRC — System Generation (11M) F-73
      RLUTIL — System Generation (11M) F-71
      RMSV20 — System Generation (11M) F-91
      RSXM35 — System Generation (11M) F-60
  external volume label — System Generation (11M) 2-2
  guidelines for copying — System Generation (11M) 2-3
  inventory — System Generation (11M) 2-2
  media — System Generation (11S) 3-1
  restriction — System Generation (11M) 2-2
  RMS-11 V2.0 files — Release Notes 2-17
  types — System Generation (11M) 2-1
$DIV (Integer divide) — System Library 3-2
Divide routine
  divide ($DIV) — System Library 3-2
  double-precision divide ($DDIV) — System Library 3-3
Division operator — PDP-11 MACRO-11 3-2, 3-5
DJ11 — I/O Drivers 2-40, 3-30
/DL switch — Task Builder 10-15
DL11 — I/O Drivers 2-40, 3-30
  receiver interrupt enable — I/O Drivers 3-33
DMAP macro
  MML — System Management 12-31 to 12-34
DMC11 — I/O Drivers 12-3
DMO command — MCR Operations 3-49
/DMP — Crash Dump Analyzer 2-2
DMP utility — Command Language 5-12
  command line — Utilities 11-2
  error message — Utilities 11-12
  example — Utilities 11-8
  mode

DMP utility
  mode (Cont.)
    device — Utilities 11-2
    file — Utilities 11-1
  switch — Utilities 11-3
DMPALL — Error Logging 4-8
$DMUL (Double-precision multiply) — System Library 3-3
DNA field in FAB — RMS-11 Macros 3-3
  CREATE operation — RMS-11 Macros 5-10
  ENTER operation — RMS-11 Macros 5-36
  ERASE operation — RMS-11 Macros 5-41
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-73
  PARSE operation — RMS-11 Macros 5-87
  REMOVE operation — RMS-11 Macros 5-103
  RENAME operation — RMS-11 Macros 5-109 to 5-110
  summary — RMS-11 Macros 6-35
DNS field in FAB — RMS-11 Macros 3-3
  CREATE operation — RMS-11 Macros 5-10
  ENTER operation — RMS-11 Macros 5-36
  ERASE operation — RMS-11 Macros 5-41
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-73
  PARSE operation — RMS-11 Macros 5-87
  REMOVE operation — RMS-11 Macros 5-103
  RENAME operation — RMS-11 Macros 5-109 to 5-110
  summary — RMS-11 Macros 6-36
/DNS switch
  FLX utility — Utilities 4-7
$DNUM
  predefined syntax element in
    MML — System Management 12-40
/DO switch
  FLX utility — Utilities 4-4
Dollar sign ($) — MCR Operations 3-151
  ODT — Program Development 5-6 to 5-8
Dollar sign ($) symbol — ODT 2-6
$DONUM
  predefined syntax element in
    MML — System Management 12-40
Dormant task — Introduction 5-7, Gloss-11, Gloss-33; Command Language 7-1

DOS-11
  device support
    FLX utility — Utilities 4-1
  file copying
    FLX utility — Utilities 4-3
  volume
    deleting
      FLX utility — Utilities 4-10
    directory listing
      FLX utility — Utilities 4-8
    initializing
      FLX utility — Utilities 4-10
Dot (.) — ODT 2-5, 7-3
Double ASCII character indicator — PDP-11 MACRO-11 3-2
Double quote character — PDP-11 MACRO-11 6-25
Double-precision divide ($DDIV) — System Library 3-3
Double-precision multiply ($DMUL) — System Library 3-3
Double-precision routine — System Library 3-2
DOWN function — EDT Editor 2-10, 5-13
DP command
  EDI editor — Program Development 2-17; Utilities 2-14, 2-31

DP11 — I/O Drivers 12-3

DPB
  description
  diagnostic
  on stack
  pointer on stack
  previously defined
  QIO
  source of I/O packet information
/DPR subkeyword
  CLI command
DQ11
DR11-K
DRGIN.MAC
Drive
Drive serial numbers
  significant numbers
Driver
  changing code
  debugging
    See Debugging
  definition
  device
    loaded
      testing
    loading
      pool requirements
    unloading
  function
  loadable
    See also Loadable driver
    default to
    partition for
    task-build
  multicontroller
  Non-MASSBUS NPR
  postinitiation service
  preinitiation processing of
  process-like characteristic
  property
  rebuilding and reincorporating
    after debugging
  resident
    See Resident driver
  role of
    in RSX-11M
  Software Performance Report (SPR) support
  SYSGEN support
  terminal
  type
  user-written
    debugging
Driver code
  changing
  example
  overview
Driver data base
  See Data base driver
Driver Dispatch Table
  See DDT

Writing I/O Driver 2-5
Executive 1-2
I/O Drivers 1-13
Writing I/O Driver 4-6
I/O Drivers 1-31
Executive 1-4
Executive 1-4
I/O Drivers 1-16
I/O Drivers 1-14
Writing I/O Driver 2-9
MCR Operations 3-37
I/O Drivers 12-3
I/O Drivers 22-2
Executive 1-12
RMS-11 Introduction 2-1
Error Logging B-1
Writing I/O Driver 3-3
System Generation (11M) 1-4
Introduction 5-4, Gloss-10
MCR Operations 4-41
MCR Operations 3-105
System Management 10-27
MCR Operations 3-107
MCR Operations 3-223
System Management 10-75
Writing I/O Driver 1-2
System Generation (11M) 4-27
System Generation (11M) 4-28
System Generation (11M) 5-10
System Generation (11M) 5-9
Writing I/O Driver 2-10
Writing I/O Driver B-1
Writing I/O Driver 2-11
Writing I/O Driver 2-11
Writing I/O Driver 2-13
Writing I/O Driver 1-2
Writing I/O Driver 3-29 to 3-30
Writing I/O Driver 2-5
Writing I/O Driver 3-4
Writing I/O Driver 3-1
Introduction 4-1
System Generation (11M) 4-46
Writing I/O Driver 1-1
System Generation (11M) 4-31
MCR Operations 3-26
Writing I/O Driver 3-3
Writing I/O Driver 6-4 to 6-9
Writing I/O Driver 3-4

Driver entry point
  cancel I/O — Writing I/O Driver 2-4, 4-10
  device interrupt — Writing I/O Driver 2-4
  device time-out — Writing I/O Driver 2-4, 4-11
  I/O initiator — Writing I/O Driver 2-4, 2-12, 4-10
  power failure — Writing I/O Driver 2-4, 4-11
Driver global symbol
  $xxINP — Writing I/O Driver 3-5
  $xxINT — Writing I/O Driver 3-5
  $xxOUT — Writing I/O Driver 3-5
  $xxTBL — Writing I/O Driver 3-5
DRQIO module
  service performed in processing QIO — Writing I/O Driver 2-11
/DRV keyword
  OPEN command — MCR Operations 3-136
DRV11 — I/O Drivers 22-2
/DS switch — PDP-11 MACRO-11 8-6
.DSABL directive — PDP-11 MACRO-11 6-19 to 6-21
  arguments for — PDP-11 MACRO-11 6-19 to 6-21
/DSABLE qualifier — PDP-11 MACRO-11 8-8
DSAR$S — Executive 5-53
$DSB
  predefined syntax element in MML — System Management 12-43
DSC utility — Command Language 5-12
  bad block information — Utilities 8-9
  command line — Utilities 8-5
    parameter — Utilities 8-5
    stand-alone — Utilities 8-21
  data transfer — Utilities 8-24
  device support — Utilities 8-4
  error message — Utilities 8-28
  file label — Utilities 8-8
  initiating — Utilities 8-5
  operation overview — Utilities 8-19
  stand-alone
    command line — Utilities 8-21
    DSC64K.SYS — Utilities 8-23
      CNF and — Utilities 8-24
    DSCSYS.SYS — Utilities 8-19
  switch — Utilities 8-6
    on-line — Utilities 8-9
    stand-alone
      DSC64K.SYS — Utilities 8-24
      DSCSYS.SYS — Utilities 8-20
    summary — Utilities 8-7, 8-20
  task build — System Generation (11M) 6-14
  terminating — Utilities 8-5
  using to backup target system disk — System Generation (11M) 6-19
DSC64K
  deleted from kits — Release Notes 1-23
DSCP$S — Executive 5-55
DSCSYS
  deleted from kits — Release Notes 1-23
DSP1M1 — Error Logging 4-4
  subpacket definition — Error Logging 4-72
DSP1P1
  subpacket definition — Error Logging 4-72
DSP2M1 — Error Logging 4-5, 4-36, 4-50 to 4-56
  subpacket definition — Error Logging 4-73
DSP2P1
  subpacket definition — Error Logging 4-73

DSP3M1
  subpacket definition — Error Logging 4-73
DSP3P1
  subpacket definition — Error Logging 4-73
DSP4M1 — Error Logging 4-5
  subpacket definition — Error Logging 4-74
DSP4P1
  subpacket definition — Error Logging 4-74
DSP5M1 — Error Logging 4-5, 4-19
  subpacket definition — Error Logging 4-74
DSP5P1
  subpacket definition — Error Logging 4-74
DSP6M1 — Error Logging 4-6
  subpacket definition — Error Logging 4-74
DSP6P1
  subpacket definition — Error Logging 4-74
DSP7M1 — Error Logging 4-6
  subpacket definition — Error Logging 4-75
DSP7P1
  subpacket definition — Error Logging 4-75
DSPPAT option — Task Builder 11-13
DSR (Dynamic Storage Region)
  See Pool
DSS/DRS
  configuration — I/O Drivers 18-7
DSS11 — I/O Drivers 18-1
  address assignment — I/O Drivers 18-2
$DSW — Executive 1-2
DSW — Executive 1-2
DT07 — I/O Drivers 23-1
  device-specifc QIO — I/O Drivers 23-4 to 23-6
  FORTRAN interface — I/O Drivers 23-8
  power-fail recovery — I/O Drivers 23-6
  standard QIO — I/O Drivers 23-2 to 23-3
  status return — I/O Drivers 23-7
DTP field in KEY block
  CREATE operation — RMS-11 Macros 5-18
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-67
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-74
DTRG$ — Executive 5-56
DU11 — I/O Drivers 12-3
Dummy argument — PDP-11 MACRO-11 7-2
/DUMP — Crash Dump Analyzer 2-2
Dump
  See also PMD
  See also Postmortem dump
  See also Snapshot dump
  memory — Task Builder D-1
Dumping file
  DMP utility — Utilities 11-1
DUP11 — I/O Drivers 12-4
Duplicate key — RMS-11 Introduction 3-10
  RMS-11 User's Guide 6-8
  See also XB$DUP mask in FLG field
DUPLICATE qualifier — EDT Editor 7-3
DUPLICATES
  RMSDES utility — RMS-11 Utilities 2-40, 2-42
    area section — RMS-11 Utilities 2-44
/DV switch
  VFY utility — Utilities 9-5
DVB field in KEY block
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-68
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-75

$DVCER Error Logging 4-21
$DVERR Error Logging 4-21
DVI field in NAM block RMS-11 Macros 3-3
  CREATE operation RMS-11 Macros 5-10, 5-21
  ENTER operation RMS-11 Macros 5-36 to 5-37
  ERASE operation RMS-11 Macros 5-41 to 5-42
  offset RMS-11 Macros 6-94
  OPEN operation RMS-11 Macros 5-73, 5-77
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-103, 5-105
  RENAME operation RMS-11 Macros 5-109 to 5-111
  SEARCH operation RMS-11 Macros 5-116
  summary RMS-11 Macros 6-96
$DVMSG routine Writing I/O Driver 5-8
$DVTMO and $DTOER Error Logging 4-20
Dynamic common region
  checkpointing System Management 14-3
  shuffling System Management 14-5
Dynamic region Executive 5-42
  Task Builder 2-20, 5-40 to 5-43

Dynamic Storage Region
  See Pool
DYNAMIC TABLE statement Error Logging 5-37
DZ11 I/O Drivers 2-40, 3-30
  remote I/O Drivers 3-31 to 3-32

E

E command ODT 2-8, 6-3
E error PDP-11 MACRO-11 6-39
  summary PDP-11 MACRO-11 D-3
E register ODT 2-7, 5-4
E1134 Error Logging 4-8
E1144 Error Logging 4-8
E1160 Error Logging 4-8
E117X Error Logging 4-8
E11XX Error Logging 4-8
/EA switch Task Builder 10-16
EAE System Generation (11M) 4-13
/EBC keyword
  SET command MCR Operations 3-176
    VMR System Management 10-48
EBCDIC I/O Operations G-17
Echo Introduction 1-6, Gloss-11
  Command Language 3-11

/ECHO keyword
  SET command MCR Operations 3-177
    VMR System Management 10-49
Echo option MCR Operations 3-177
  System Management 10-49

ED command
  EDI editor Utilities 2-32
EDI editor Introduction 2-3
  Command Language 4-20 to 4-22, 9-16
  Program Development 1-3 to 1-4

  abbreviating
    strings Program Development 2-16
  altering
    text Program Development 2-16, 7-5
  AP command Program Development 2-17
  asterisk (*) Program Development 2-10
  BEGIN command Program Development 2-14
  block mode Program Development 1-3

EDI editor (Cont.)
  CHANGE command — Program Development 2-16, 7-5
  character erase — Utilities 2-6
  command
    basic — Utilities 2-9
    detailed reference summary — Utilities 2-27
    device output — Utilities 2-26
    file I/O — Utilities 2-25
    function summary — Utilities 2-20
    locator — Utilities 2-22
    macro — Utilities 2-25
    set up — Utilities 2-21
    summary — Utilities 2-10
    text manipulation — Utilities 2-23 to 2-24
    text modification — Utilities 2-23 to 2-24
  commands — Program Development 2-12 to 2-18
  control mode — Utilities 2-3
  convention
    command — Utilities 2-8
    terminal — Utilities 2-6
  correcting
    source file error — Program Development 7-4 to 7-5
    task error — Program Development 4-9, 7-9
  creating
    file — Program Development 2-9 to 2-10, 2-12, 7-2 to 7-3
  deleting
    characters — Program Development 2-17
    lines — Program Development 2-17
  displaying
    text — Program Development 2-13
  DP command — Program Development 2-17
  ellipsis — Program Development 2-16
  END command — Program Development 2-14
  error message — Utilities 2-56
    command level information — Utilities 2-57
    fatal — Utilities 2-64
    file access — Utilities 2-60
    requiring EDI restart — Utilities 2-61
  ESCAPE key — Program Development 2-13
  example — Utilities 2-51
  EXIT command
    closing file — Program Development 2-10, 7-7
    creating new file — Program Development 2-12, 2-18, 7-5
  file specification
    default — Utilities 2-2
    format — Utilities 2-2
  initiating (invoking) — Utilities 2-1
  input
    initial — Program Development 2-9, 7-3
    terminating — Program Development 2-10
  INSERT command — Program Development 2-18, 7-7
  insert mode — Program Development 2-18
  inserting
    characters — Program Development 2-17
    lines — Program Development 2-9, 2-18
  line erase — Utilities 2-7
  LIST command — Program Development 2-13
  LOCATE command — Program Development 2-14, 2-18, 7-4 to 7-5, 7-7
  locating
    text — Program Development 2-14 to 2-15, 7-4 to 7-5
  paging — Utilities 2-5
  PLOCATE command — Program Development 2-15
  positioning

EDI editor
  positioning (Cont.)
    line pointer — Program Development 2-14 to 2-15
  RENEW command — Program Development 2-15
  RETURN key — Program Development 2-9 to 2-10, 2-13, 2-18, 7-7; Utilities 2-7
  slash (/) — Program Development 2-16
  text access mode — Utilities 2-3
    block mode — Utilities 2-4
    line-by-line mode — Utilities 2-4
  text file
    creating — Utilities 2-2
    input — Utilities 2-6
    output — Utilities 2-6
    secondary — Utilities 2-6
  TYPE command — Program Development 2-13 to 2-14, 2-17
  usage notes — Utilities 2-50
EDIT command — Introduction 2-3, 4-3; Command Language 4-14, 4-21 to 4-22
EDIT/EDT command — Command Language 4-14 to 4-16, 9-15
EDIT/SLP command — Command Language 4-17 to 4-19
Editor — Introduction 2-2, 2-17, Gloss-12
  EDI — Command Language 4-20 to 4-22, 9-15; Utilities 2-1
  EDT — Command Language 4-14 to 4-16
  K52 — Command Language 4-20 to 4-22, 9-16
  KED — Command Language 4-20 to 4-22, 9-16
  SLP — Command Language 4-17 to 4-19, 9-15
  SOS — Command Language 4-20 to 4-22, 9-16
  TECO — Command Language 4-20 to 4-22, 9-16
  text — Program Development 1-3 to 1-4
    See also EDI editor, EDT editor
$EDMSG (Edit message) — System Library 6-5
$EDR
  predefined syntax element in MML — System Management 12-44
EDT editor — Introduction 2-3; Program Development 1-3
  buffer — Introduction 2-4, 2-17
  change mode — Introduction 2-3, 2-17, Gloss-6
  command line — EDT Editor 2-2, 4-1
  command line qualifier — EDT Editor 4-1
  controlling characteristics of — EDT Editor 9-1
  COPY command — Introduction 2-10 to 2-11
  copying text — Introduction 2-10 to 2-11
  DEC Standard Editor — Command Language 4-14 to 4-16, 9-15
  DEFINE command — Introduction 2-17, Gloss-9
  DELETE command — Introduction 2-12, 2-14
  deleting text — Introduction 2-12
  displaying text — Introduction 2-5, 2-7 to 2-8
  ending a keypad session — EDT Editor 2-19, 5-9
  ending a line editing session — EDT Editor 2-24, 7-8, 7-14
  ending a nokeypad session — EDT Editor 2-44, 8-10
  example of command line — EDT Editor 4-1

EDT editor (Cont.)
  EXIT command — Introduction 2-15, 3-9
  features — EDT Editor 1-1
  FIND command — Introduction 2-13
  HELP command — Introduction 2-6
  INSERT command — Introduction 2-4, 2-9
  journaling — Introduction 2-17, Gloss-18
  line
    definition of — Introduction 2-16
    length — Introduction 2-16
    number — Introduction 2-9, Gloss-19
    truncation — Introduction 2-16
    wrapping — Introduction 2-16
  line mode — Introduction 2-4, Gloss-19
  line number — Introduction 2-4, 2-8
  line pointer — Introduction 2-5, 2-8 to 2-9, 2-13, Gloss-19
  minus sign (-) command — Introduction 2-13 to 2-14
  mode
    change — Introduction 2-17, Gloss-6
    line — Introduction Gloss-19
  MOVE command — Introduction 2-10 to 2-11
  moving text — Introduction 2-10 to 2-11
  number
    line — Introduction 2-8 to 2-9
  plus sign (+) command — Introduction 2-13 to 2-14
  prompt — Introduction 2-3
  QUIT command — Introduction 2-14 to 2-15
  quotation marks — Introduction 2-13 to 2-14
  range — Introduction 2-5 to 2-9, 2-11 to 2-14
  replacing text — Introduction 2-11
  restriction — Release Notes 1-34
  RESEQUENCE command — Introduction 2-9 to 2-11
  searching
    text — Introduction 2-13
  show version number of — EDT Editor 9-17
  starting a keypad session — EDT Editor 2-5, 5-1
  starting a line editing session — EDT Editor 2-20, 7-1
  starting a nokeypad session — EDT Editor 2-36, 8-1
  starting an editing session — EDT Editor 2-3, 4-1
  SUBSTITUTE command — Introduction 2-11 to 2-12
  summary — Introduction 2-17
  text
    displaying — Introduction 2-5, 2-7 to 2-8
  truncation
    line — Introduction 2-16
  TYPE command — Introduction 2-4, 2-8, 2-15
  wrapping
    line — Introduction 2-16
EDT field in DAT block
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-14
  OPEN operation — RMS-11 Macros 5-81
  summary — RMS-11 Macros 6-18
EDT field in NAM block
  RSX-11 — RMS-11 Macros D-4
EDTINI.EDT — EDT Editor 1-5, 4-9 to 4-10
Eight-bit character option — System Management 10-48
EIS — System Generation (11M) 4-14
/EL switch — Task Builder 10-17
ELAW$ — Executive 5-58
Element
  extended arithmetic
    specifying — Task Builder 10-16
ELGF$ — Executive 5-60

ELI — Error Logging 1-1
  /AP switch — Error Logging 2-3, 2-8
  Append switch — Error Logging 2-3, 2-8
    Delete subswitch — Error Logging 2-3, 2-8
  /BA switch — Error Logging 2-3, 2-9
  Backup switch — Error Logging 2-3, 2-9
  error messages
    console terminal — Error Logging 2-11
    user terminal — Error Logging 2-11
  file naming switch — Error Logging 2-8
  Hard error limit switch — Error Logging 2-3, 2-7
  /HL switch — Error Logging 2-3, 2-7
  installing
    privileged — Error Logging 2-1
    startup command file — Error Logging 2-1
  invoking — Error Logging 2-2
    privileged — Error Logging 2-1
  /LIM switch — Error Logging 2-3, 2-6
  Limit switch — Error Logging 2-3, 2-6
  /LOG switch — Error Logging 2-2 to 2-5, 2-8
  Log switch — Error Logging 2-3 to 2-5, 2-8
    error limiting and — Error Logging 2-2
    New version subswitch — Error Logging 2-3, 2-6
    No limit subswitch — Error Logging 2-3, 2-5 to 2-6
  No limit switch — Error Logging 2-3, 2-6
  No log switch — Error Logging 2-4
  /NOLIM switch — Error Logging 2-3, 2-6
  /NOLOG switch — Error Logging 2-4
  nonprivileged command — Error Logging 2-2
  privileged commands — Error Logging 2-2
  /R switch — Error Logging 2-4
  /RE switch — Error Logging 2-7
  Reset switch — Error Logging 2-4, 2-7
  /SH switch — Error Logging 2-4, 2-10 to 2-11
  Show switch — Error Logging 2-2, 2-4, 2-10 to 2-11
  /SL switch — Error Logging 2-4, 2-7
  Soft error limit switch — Error Logging 2-4, 2-7
  subswitch summary — Error Logging 2-3
  /SW switch — Error Logging 2-4, 2-8
  switch functions — Error Logging 2-1
  switch summary — Error Logging 2-3
  Switch switch — Error Logging 2-4, 2-8
    Delete subswitch — Error Logging 2-4, 2-9
    New version subswitch — Error Logging 2-4, 2-9
  using ERRLOG defaults — Error Logging 2-2
ELI command
  reset limit — Error Logging 1-4
ELI show switch
  QIO count — Error Logging 2-11
ELI switches
  type
    display — Error Logging 2-2
    file naming — Error Logging 2-2
    limiting — Error Logging 2-2
    logging — Error Logging 2-2
/ELIM keyword
  CLI command — MCR Operations 3-35
  FLA command — MCR Operations 3-55
Eliminate Address Window
    directive — Executive 5-58
Eliminate Group Global Event
    Flags directive — Executive 5-60
Ellipsis
  EDI editor — Program Development 2-16
Emit Status — Executive 5-64
EMLll — Error Logging 4-8

EMST$ Executive 5-64
/EN switch PDP-11 MACRO-11 8-6
  PIP utility Utilities 3-19
  QUE /DEL command Batch and Queue 2-10
  QUE /LI command Batch and Queue 2-16
.ENABL directive PDP-11 MACRO-11 6-19 to 6-21
  arguments for PDP-11 MACRO-11 6-19 to 6-21
Enable AST Recognition directive Executive 5-65
Enable Checkpointing directive Executive 5-66
.ENABLE directive MCR Operations 4-32
  example MCR Operations 4-34
  format MCR Operations 4-34
  operating mode MCR Operations 4-32
/ENABLE keyword
  CLI command MCR Operations 3-36
/ENABLE qualifier PDP-11 MACRO-11 8-8
ENABLE statement Error Logging 5-40
ENAR$S Executive 5-65
Encoding function Error Logging 5-19
ENCP$S Executive 5-66
END
  range specification EDT Editor 6-8
END command
  EDI editor Program Development 2-14
  EDI editor Utilities 2-31
.END directive PDP-11 MACRO-11 6-39
Program Development 2-7, 3-4, 4-3, 4-8
MCR Operations 4-35
Task Builder 3-22
  format MCR Operations 4-35
End of global symbol directory Task Builder A-11
End of module record Task Builder A-24
End-of-block indicator
  sequential files RMS-11 User's Guide 3-2
End-of-file
  indicating MCR Operations 2-18
  sequential files RMS-11 User's Guide 3-2
End-of-tape
  logical I/O Drivers 9-8
  paper tape I/O Drivers 17-5
End-of-volume status
  magnetic tape I/O Drivers 8-15 to 8-16
.ENDC directive PDP-11 MACRO-11 6-51
Ending
  a keypad session EDT Editor 2-19, 5-9
  a line editing session EDT Editor 2-36, 7-8, 7-14
  a nokeypad session EDT Editor 2-44, 5-21, 8-10, 8-15
Ending an editing session EDT Editor 5-9
.ENDM directive PDP-11 MACRO-11 7-2
.ENDR directive PDP-11 MACRO-11 7-19
.ENTER I/O Operations 4-15
ENTER function EDT Editor 5-46
  correct mistake EDT Editor 5-47
  example with COMMAND EDT Editor 5-47
ENTER key Command Language 3-12, 3-17
$ENTER macro RMS-11 Macros 5-35
  RSTS/E RMS-11 Macros D-4
ENTER operation RMS-11 Introduction 4-1
RMS-11 User's Guide 1-17
RMS-11 Macros 3-5
  BDB requirement RMS-11 Macros 2-8
  $ENTER macro RMS-11 Macros 5-35
  file versions RMS-11 User's Guide A-3
  I/O buffer requirement RMS-11 Macros 2-7
  IFAB requirement RMS-11 Macros 2-5
  remote access RMS-11 User's Guide B-1

ENTER operation (Cont.)
  wildcard loop — RMS-11 Macros 3-10
Entity
  BL — EDT Editor 8-2
  BPAGE — EDT Editor 8-3
  BPAR — EDT Editor 8-3
  BR — EDT Editor 8-3
  BSEN — EDT Editor 8-3
  BW — EDT Editor 8-2
  C — EDT Editor 8-2
  EL — EDT Editor 8-2
  [EOB] symbol — EDT Editor 2-4
  EPAGE — EDT Editor 8-3
  EPAR — EDT Editor 8-3
  ER — EDT Editor 8-3
  ESEN — EDT Editor 8-3
  EW — EDT Editor 8-2
  keypad editing — EDT Editor 5-16
  L — EDT Editor 8-2
  NL — EDT Editor 8-3
  nokeypad editing — EDT Editor 8-2
  PAGE — EDT Editor 8-3
  PAR — EDT Editor 8-3
  SEN — EDT Editor 8-3
  SR — EDT Editor 8-4
  "string" — EDT Editor 8-4
  V — EDT Editor 8-3
  W — EDT Editor 8-2
Entry point — Program Development 6-5 to 6-6
  table — Program Development 6-5, 6-9 to 6-10
    zero entry points — Program Development 6-7
Entry point definition, program — PDP-11 MACRO-11 6-39
Entry point symbol — PDP-11 MACRO-11 6-49
Entry procedure — Error Logging 4-10
/ENTRY qualifier
  DELETE command — Batch and Queue 2-10
  SHOW QUEUE command — Batch and Queue 2-16
/EO switch
  RMSCNV utility — RMS-11 Utilities 4-8
[EOB] symbol — EDT Editor 2-4
/EOF switch
  PIP utility — Utilities 3-21
<EOF> symbol — MCR Operations 4-8
$EOL
  predefined syntax element in MML — System Management 12-43
EOL function — EDT Editor 5-18
EOS
  breakpoint — System Generation (11M) 3-8, 4-8
EOX
  breakpoint — System Generation (11M) 3-9, 4-8, 5-6
/EP switch
  LBR utility — Utilities 10-16
EPKDF$ — Crash Dump Analyzer B-7
EPKDF.MAC — Error Logging 4-16
EQ condition test argument — PDP-11 MACRO-11 6-51
Equal sign (+) operator — ODT 7-2
Equal sign (=) — Command Language 3-16
  DCL — Command Language 1-9
Equal sign (=) command — ODT 2-8, 7-2
Equal sign (=) operator — ODT 2-8
Equal sign command
  ZAP utility — Utilities 15-17
/ER switch
  RMSIFL utility — RMS-11 Utilities 3-5 to 3-6

ER$-family symbol
  declaring — RMS-11 Macros C-3
  value — RMS-11 Macros A-1 to A-18
ER$ACT
  asynchronous operations — RMS-11 User's Guide 3-14, 4-14, 7-8
ER$CUR
  DELETE operation — RMS-11 User's Guide 4-7
  TRUNCATE operation — RMS-11 User's Guide 3-12
  UPDATE operation — RMS-11 User's Guide 3-12, 4-12, 7-6
ER$DEL
  FIND operation — RMS-11 User's Guide 4-8, 7-3
  GET operation — RMS-11 User's Guide 4-11, 7-5
ER$EOF
  FIND operation — RMS-11 User's Guide 3-8, 4-8, 7-3
  GET operation — RMS-11 User's Guide 3-10, 4-10, 7-5
  PUT operation — RMS-11 User's Guide 3-11
ER$IOP
  UPDATE operation — RMS-11 User's Guide 3-12
ER$KEY
  FIND operation — RMS-11 User's Guide 3-8
  GET operation — RMS-11 User's Guide 3-10
ER$LIB
  and resident libraries — RMS-11 User's Guide 8-8
ER$MRN
  FIND operation — RMS-11 User's Guide 4-8
  GET operation — RMS-11 User's Guide 4-10
ER$NEF
  PUT operation — RMS-11 User's Guide 3-10
ER$RAC
  PUT operation — RMS-11 User's Guide 3-10
ER$REX
  PUT operation — RMS-11 User's Guide 4-11
ER$RFA
  FIND operation — RMS-11 User's Guide 3-8, 7-3
  GET operation — RMS-11 User's Guide 3-10, 7-5
ER$RFM
  UPDATE operation — RMS-11 User's Guide 3-12
ER$RLK
  and shared access — RMS-11 User's Guide 2-10
ER$RNF
  FIND operation — RMS-11 User's Guide 4-8, 7-3
  GET operation — RMS-11 User's Guide 4-10 to 4-11, 7-5
ER$RSZ
  UPDATE operation — RMS-11 User's Guide 3-12
ERASE command
  EDI editor — Utilities 2-32
.ERASE directive — MCR Operations 4-35
  example — MCR Operations 4-36
  format — MCR Operations 4-35
$ERASE macro — RMS-11 Macros 5-40
  example — RMS-11 Macros 7-11
ERASE operation — RMS-11 Introduction 4-2
  — RMS-11 User's Guide 1-18
  — RMS-11 Macros 3-7
  BDB requirement — RMS-11 Macros 2-8
  $ERASE macro — RMS-11 Macros 5-40
  I/O buffer requirement — RMS-11 Macros 2-7
  IFAB requirement — RMS-11 Macros 2-5
  remote access — RMS-11 User's Guide B-2
  wildcard loop — RMS-11 User's Guide A-4
  — RMS-11 Macros 3-9 to 3-10
    nonselective — RMS-11 Macros 3-10
    selective — RMS-11 Macros 3-11

ERK05 Error Logging 4-8
ERK67 Error Logging 4-8
/ERL switch
  FMT utility Utilities 5-8
ERL12 Error Logging 4-8
ERLCFL Report Messages Error Logging 5-44
ERLCNF Report Messages Error Logging 3-22
  fatal Error Logging 3-22
  information Error Logging 3-27
ERLRPT Report Messages Error Logging 3-28
  control file Error Logging 3-28
ERM05 Error Logging 4-8
ERM23 Error Logging 4-8
ERM23 device-level module Error Logging 4-37 to 4-49
ERM80 Error Logging 4-8
ERP07 Error Logging 4-8
ERP23 Error Logging 4-8
ERP456 Error Logging 4-8
ERR macro
  MML System Management 12-30
<ERRCTL> symbol MCR Operations 4-10
ERRDEFINE.CFS Error Logging 3-20
ERRLOG Error Logging 1-1
  Backup file Error Logging 2-9
  backup file Error Logging 1-4
  defaults Error Logging 2-2
  ELI commands Error Logging 1-3 to 1-4
  installing
    privileged Error Logging 2-1
  log file Error Logging 1-4
  mandatory installation Error Logging 2-1
  stopping
    using SHUTUP System Management 8-4
ERRLOG Messages Error Logging 2-12
ERRLOG.ULB Error Logging 3-2
  module addition Error Logging 4-36
  tuning Error Logging A-1
ERRLOGETC.ULG Error Logging 4-36
<ERRNUM> symbol MCR Operations 4-10
Error Introduction 1-1, 1-8, 1-12, 2-9
  assembly-time RMS-11 Macros 2-20
  DCL Command Language 1-13
  detection ODT A-1
  exit TKB commands on Task Builder 11-4
  fatal RMS-11 Macros 2-15
  handler RMS-11 Macros 2-17
  handling
    $ALERR entry Task Builder 4-12
    for autoload Task Builder 4-11 to 4-12
    for manual load Task Builder 4-12
    overlay Task Builder 4-12
  Indirect
    processing MCR Operations 4-43
  input ODT A-1
  log file
    inserting text MCR Operations 3-212
  message Task Builder H-1
    See Message
  task image ODT A-2
Error code RMS-11 User's Guide 3-7, 4-7, 7-2
  ER$ACT RMS-11 User's Guide 3-14, 4-14, 7-8
  ER$CUR RMS-11 User's Guide 3-12, 4-7, 4-12, 7-6
  ER$DEL RMS-11 User's Guide 4-8, 4-11, 7-3, 7-5

Error code (Cont.)
  ER$EOF — RMS-11 User's Guide 3-8, 3-10 to 3-11, 4-8, 4-10, 7-3, 7-5
  ER$IOP — RMS-11 User's Guide 3-12
  ER$KEY — RMS-11 User's Guide 3-8, 3-10
  ER$LIB — RMS-11 User's Guide 8-8
  ER$MRN — RMS-11 User's Guide 4-8, 4-10
  ER$NEF — RMS-11 User's Guide 3-10
  ER$RAC — RMS-11 User's Guide 3-10
  ER$REX — RMS-11 User's Guide 4-11
  ER$RFA — RMS-11 User's Guide 3-8, 3-10, 7-3, 7-5
  ER$RFM — RMS-11 User's Guide 3-12
  ER$RLK — RMS-11 User's Guide 2-10
  ER$RNF — RMS-11 User's Guide 4-8, 4-10 to 4-11, 7-3, 7-5
  ER$RSZ — RMS-11 User's Guide 3-12
  RMSIFL utility
    sort routine — RMS-11 Utilities D-1
Error code, assembler
  summary — PDP-11 MACRO-11 D-1 to D-5
.ERROR directive — PDP-11 MACRO-11 7-15
Error handling
  .PRINT — I/O Operations 8-2
  PRINT$ — I/O Operations 8-2
Error limit — Error Logging 1-4
  altering
    IOX — System Management 4-35
  device mount — Error Logging 2-6
  logging and — Error Logging 2-6
  notification — Error Logging 1-4
  reset — Error Logging 1-4, 2-7
  reset counts — Error Logging 2-6
  system reboot — Error Logging 2-6
Error log
  command packet — Error Logging 1-4
  control file
    architecture — Error Logging 4-1
    definition — Error Logging 4-1
  devices — Error Logging 2-4
  file
    definition — Error Logging 1-1
    format — Error Logging 4-2
    naming — Error Logging 5-1
    RPT — Error Logging 2-8
  interface
    See ELI — Error Logging 1-3
  packet — Error Logging 1-1
    command — Error Logging 1-3
    creation — Error Logging 4-23
    definition — Error Logging 4-2
    ERRSEQ — Error Logging 1-3
    format — Error Logging 1-4, 5-1, C-1
    packet number
      definition — Error Logging 1-3
    processing — Error Logging 5-1
    queue — Error Logging 4-24
    remove from queue — Error Logging 4-25
    SMSG$ — Error Logging 1-4
    structure — Error Logging 4-3
    unsolicited interrupt — Error Logging 4-23
  packet number — Error Logging 3-1
  report
    context information — Error Logging 1-5

Error log (Cont.)
  subpacket
    definition — Error Logging 4-2
  system
    task interaction — Error Logging 1-2
Error log packet dump — Crash Dump Analyzer 1-6, 3-2, 3-19

Error Logger
  See also ERRLOG
  relationship to RCT — System Management 5-5
Error logging — Executive 5-162
  device — System Generation (11M) 4-30
  device errors — Error Logging 1-6
  executive directive support — Executive 5-162
  executive support — Error Logging 1-6
    device errors — Error Logging 1-6
    device timeouts — Error Logging 1-6
    memory errors — Error Logging 1-6
    unexpected traps or interrupts — Error Logging 1-6
  interrupt timeouts — Error Logging 1-6
  memory errors — Error Logging 1-6
  modifying driver to incorporate — Writing I/O Driver 3-5
  restriction — Release Notes 1-24
  SCB field — Writing I/O Driver 4-20
  support on Non-DIGITAL device — Error Logging 4-19
    device level module — Error Logging 4-19
    driver — Error Logging 4-19
    universal library entry — Error Logging 4-19
  UCB field — Writing I/O Driver 4-24 to 4-25
  Unexpected traps or interrupts — Error Logging 1-6
  unknown device
    See EUNKWN
  unused vectors — Error Logging 1-6
Error logging devices
  control file module — Error Logging 2-4 to 2-5
Error logging system
  CDA — Error Logging 1-1
  Control file language compiler — Error Logging 1-1
  device I/O activity — Error Logging 1-1
  Error log interface — Error Logging 1-1
  Error logger — Error Logging 1-1
  executive routines — Error Logging 1-1
  hard error — Error Logging 1-3
  mass storage device errors — Error Logging 1-1
  memory errors — Error Logging 1-1
  operating system failure — Error Logging 1-1
  Report generator — Error Logging 1-1
  soft error — Error Logging 1-3
Error message — Introduction 1-1, 2-9, Gloss-12; System Generation (11M) 8-1; Command Language A-1
  See also Message
  BAD utility — Utilities 6-10
  BRU utility — Utilities 7-34
  CMP utility — Utilities 12-6
  Console Logger — System Management 3-11 to 3-13
  CRF utility — Utilities B-5
  DMP utility — Utilities 11-12
  DSC utility — Utilities 8-28
  EDI editor — Utilities 2-56
  FLX utility — Utilities 4-17
  FMT utility — Utilities 5-10

Error message (Cont.)
  FORTRAN IV — Program Development 7-4
  IOX — System Management 4-66
  LBR utility — Utilities 10-33
  list of — EDT Editor A-1
  MAC task — PDP-11 MACRO-11 8-19 to 8-21
  MACRO-11 — Program Development 3-5
  ODT — Program Development 5-3
  PAT utility — Utilities 14-7
  PIP utility — Utilities 3-43
  purpose of — EDT Editor 3-7
  RMD — System Management 6-13D
  SLP utility — Utilities 13-20
  TKB — Program Development 4-2
  TKTN — Program Development 4-8
  UETP — System Management 9-5
  VFY utility — Utilities 9-11
  VMR — System Management 10-76
  ZAP utility — Utilities 15-23
ERROR module — Error Logging 4-19
Error notice
  macro definition — PDP-11 MACRO-11 7-15 to 7-16
Error report
  data compare
    IOX — System Management 4-21
  directing to device
    IOX — System Management 4-41
  disabling
    IOX — System Management 4-52
  enabling
    IOX — System Management 4-52
  I/O error
    IOX — System Management 4-21
  types
    IOX — System Management 4-52
  UETP — System Management 9-4
Error sequence number
  See ERRSEQ
Error type definition — Error Logging 1-5
ERRORLIMIT command
  IOX — System Management 4-35
ERRORM — Error Logging 4-7
/ERRORS qualifier
  BRU utility — Utilities 7-16
ERRSEQ
  Append switch — Error Logging 1-3
  change — Error Logging 1-3
  RMD use — Error Logging 1-3
<ERRSEV> symbol — MCR Operations 4-10
ERS11 — Error Logging 4-9
ERS34 — Error Logging 4-9
<ERSEEN> symbol — MCR Operations 4-8
ERX01 — Error Logging 4-9
ERX02 — Error Logging 4-9
ESA field in NAM block — RMS-11 Macros 3-3, 3-9
  CREATE operation — RMS-11 Macros 5-10
  ENTER operation — RMS-11 Macros 5-36
  ERASE operation — RMS-11 Macros 5-42
  offset — RMS-11 Macros 6-94
  OPEN operation — RMS-11 Macros 5-74
  PARSE operation — RMS-11 Macros 5-87
  REMOVE operation — RMS-11 Macros 5-104
  RENAME operation — RMS-11 Macros 5-110
  SEARCH operation — RMS-11 Macros 5-116
  summary — RMS-11 Macros 6-97

$ESB
  predefined syntax element in
    MML — System Management 12-43
ESC command
  RMSDES utility — RMS-11 Utilities 2-9, 2-21
ESC key — Command Language 3-12
  MCR Operations 2-15

Escape code
  conversion — I/O Drivers 2-40A, 3-30
ESCape command
  EDI editor — Utilities 2-14, 2-32
ESCAPE key — Command Language 3-12
  EDI editor — Program Development 2-13
  requesting list of options
    ACNT — System Management 2-3
Escape recognition mode — MCR Operations 4-33
Escape sequence — I/O Drivers 2-29, 3-22
  receiving — I/O Drivers 2-32
  syntax exception — I/O Drivers 2-33
  syntax violation — I/O Drivers 2-32
  VT100 — I/O Drivers 2-31
ESCAPE sequence from terminal — Command Language 3-17
Escape-sequence recognition
  mode — MCR Operations 4-33
  option — MCR Operations 3-178
  System Management 10-49

<ESCAPE> symbol — MCR Operations 4-9
/ESCSEQ keyword
  SET command — MCR Operations 3-178
    VMR — System Management 10-49
ESL field in NAM block
  CREATE operation — RMS-11 Macros 5-21
  ENTER operation — RMS-11 Macros 5-37
  ERASE operation — RMS-11 Macros 5-42
  offset — RMS-11 Macros 6-94
  OPEN operation — RMS-11 Macros 5-77
  PARSE operation — RMS-11 Macros 5-88
  REMOVE operation — RMS-11 Macros 5-105
  RENAME operation — RMS-11 Macros 5-111
  SEARCH operation — RMS-11 Macros 5-116
  summary — RMS-11 Macros 6-98
ESS field in NAM block
  CREATE operation — RMS-11 Macros 5-10
  ENTER operation — RMS-11 Macros 5-36
  ERASE operation — RMS-11 Macros 5-42
  offset — RMS-11 Macros 6-94
  OPEN operation — RMS-11 Macros 5-74
  PARSE operation — RMS-11 Macros 5-87
  REMOVE operation — RMS-11 Macros 5-104
  RENAME operation — RMS-11 Macros 5-110
  summary — RMS-11 Macros 6-99
/EST keyword
  RUN command — MCR Operations 3-152
ET0310 — Error Logging 4-9
ET1645 — Error Logging 4-9
ETA11 — Error Logging 4-9
ETC11 — Error Logging 4-9
ETS11 — Error Logging 4-9
ETSV05 — Error Logging 4-9
ETU58 — Error Logging 4-9
ETU77 — Error Logging 4-9
EUNKWN — Error Logging 4-8, 4-19, 4-37
Evaluating expression
  See also Expression
.EVEN assembler directive
  control block alignment — RMS-11 Macros 2-8

.EVEN assembler directive (Cont.)
  pool alignment — RMS-11 Macros 2-4
.EVEN directive — PDP-11 MACRO-11 6-37
Event
  definition — Error Logging 1-3, 4-2
  flag — Executive 2-2
  pool
    affecting pool condition — System Management 13-3
    detecting — System Management 13-1
    extreme fragmentation — System Management 13-1 to 13-4, 13-7 to 13-10, 13-12
    general fragmentation — System Management 13-2 to 13-4
    major — System Management 13-1 to 13-3
  significant — Introduction 5-8, Gloss-30; Executive 2-1, 5-52
Event flag — Executive 2-2
  common — Executive 2-2
  group global — Executive 2-2; Executive 5-60, 5-206; System Generation (11M) 4-35; Command Language 6-91 to 6-92, 9-32, 9-38
  implicitly altering — Executive 2-2
  locking — Executive 5-40
  mask word — Executive 5-105
  parameter to FDBF$A — I/O Operations 2-17
  parameter to FDBK$A — I/O Operations 2-12
  polarity — Executive 5-28
  reporting polarity — Executive 5-125, 5-127
  setting — Executive 5-159
  stopping for — Executive 5-198, 5-201
  testing — Executive 2-3
  unlocking — Executive 5-60, 5-206
  use in IOX — System Management 4-64
  using for I/O operations — I/O Operations 2-42
  wait for — Executive 5-223; I/O Drivers 1-24
Event-level dispatching — Error Logging 4-16
  control information — Error Logging 4-17
  CPU-detected errors — Error Logging 4-17
  device control information — Error Logging 4-17
  device errors — Error Logging 4-17
  device information — Error Logging 4-17
  dispatcher module — Error Logging 4-18
  error log control code — Error Logging 4-17
  event code — Error Logging 4-18
  event type — Error Logging 4-18
  format — Error Logging 4-18
  system control information — Error Logging 4-17
/EX switch
  LBR utility — Utilities 10-18
  PIP utility — Utilities 3-21
EXACT_POSITIONING
  RMSDES utility — RMS-11 Utilities 2-47
Examine location
  See Displaying
Examine option
  ACNT — System Management 2-4 to 2-5
Example
  Brief format report — Error Logging 3-13 to 3-14
  device information table — Error Logging 4-34
  DSP2M1 dispatch module — Error Logging 4-14
  DSP2M1 dispatcher module — Error Logging 4-50 to 4-56
  ERM23 — Error Logging 4-26
  ERM23 device-level module — Error Logging 4-37 to 4-49
  ERM23 module — Error Logging 4-14

Example (Cont.)
  ERM23 notes file — Error Logging 4-31
  error log packet format — Error Logging 5-2
  error log subpacket format — Error Logging 5-2
  Full format report — Error Logging 3-16 to 3-17
  notes module — Error Logging 4-67 to 4-68
  NRM23 notes module — Error Logging 4-67 to 4-68
  Register report — Error Logging 3-19
  RM02/03
    register printing — Error Logging 4-27
  RM02/03 module — Error Logging 4-38 to 4-49
  RM03 module — Error Logging 4-13
  RMSBCK utility — RMS-11 Utilities 6-10
  RMSCNV utility — RMS-11 Utilities 4-16
  RMSDES utility — RMS-11 Utilities 2-47
  RMSDSP utility — RMS-11 Utilities 5-5
  RMSIFL utility — RMS-11 Utilities 3-14
  RMSRST utility — RMS-11 Utilities 7-12
Exception code
  RMSIFL utility — RMS-11 Utilities 3-6
Exception record
  RMSIFL utility — RMS-11 Utilities 3-5 to 3-6, 3-10
Exclamation point (!)
  operator
    See ODL operator
/EXCLUDE qualifier
  BRU utility — Utilities 7-16
EXECUTE command
  IOX — System Management 4-36
Execution
  termination
    of task
      IOX — System Management 4-23
Execution mode
  entering
    IOX — System Management 4-59
  IOX — System Management 4-18
Executive — Introduction 1-21, 4-1, 4-9, 5-6 to 5-8, 5-11, Gloss-12
  building — System Generation (11S) 4-5
  change to task abort code — Release Notes 1-24
  code
    changes to — Release Notes 1-32
  commons — System Generation (11M) 4-24
  configuring
    using VMR — System Generation (11S) 4-10
  data structures
    changes to — Release Notes 1-32
  debugging — MCR Operations 3-26
  definition — System Generation (11M) 1-3
  directive — Introduction 5-8
  Large (20K) — System Generation (11M) 4-30
  library — Program Development 1-11
    macro — Program Development 1-9 to 1-10
  module
    CORAL.MAC — System Management 13-2 to 13-3
  pool monitor
    code — System Management 13-1, 13-12
    interface — System Management 13-2 to 13-3
  routines
    $GTWRD — System Generation (11M) 4-31
    $PTWRD — System Generation (11M) 4-31
  size — System Generation (11S) 1-3
  source files disk — System Generation (11M) 4-9
  source module
    updating — Release Notes 1-40

Executive (Cont.)
  virgin
    booting — MCR Operations 3-24
Executive Crash Dump Routine — Crash Dump Analyzer 1-1
  Writing I/O Driver 3-20
Executive Debugging Tool
  See XDT
Executive directive
  summary — I/O Operations C-1 to C-3
Executive error logging support — Error Logging 1-6
Executive Reference Manual
  note to — Release Notes 1-62
Executive routines
  error collection
    device registers — Error Logging 1-3
Executive Send Message directive
  See SMSG$
Executive service
  driver processing — Writing I/O Driver 2-10
  postinitiation — Writing I/O Driver 2-11
  preinitiation — Writing I/O Driver 2-11
Executive service calls — Writing I/O Driver 5-1 to 5-28
Executive stack and register dump
    routine — Writing I/O Driver 3-17
  debugging driver code — Writing I/O Driver 3-16
  use of
    in fault tracing — Writing I/O Driver 3-25
Executive Symbol Table — Crash Dump Analyzer 1-1
Executive-level dispatching — Executive 5-5
EXELIB.OLB — Program Development 1-11
  Command Language 6-40
  Command Language 6-41
EXEMC.MLB — Crash Dump Analyzer B-1
  Program Development 1-9 to 1-10
Exercise
  NFS volume
    with VERIFY
      IOX — System Management 4-14
  with VERIFY
    IOX — System Management 4-14
EXIF$ — Executive 5-67
Existing file
  opening by file ID — I/O Operations 3-14
/EXIT — Crash Dump Analyzer 2-6
Exit
  ODT — ODT 1-4
  task resources freed — Executive 1-3
EXIT & DELETE command
  EDI editor — Utilities 2-32
EXIT command — EDT Editor 2-31, 7-8
  EDI editor — Program Development 2-10, 2-12, 2-18, 7-5, 7-7
  Utilities 2-14, 2-27, 2-32
  EDT — Introduction 2-14 to 2-15, 3-9
  IOX — System Management 4-37
  keypad editing — EDT Editor 2-20, 5-9
  line editing — EDT Editor 2-28, 7-8
  nokeypad editing — EDT Editor 8-10
  nokeypad editing (EX) — EDT Editor 2-44
  RMSDES utility — RMS-11 Utilities 2-3, 2-9, 2-18, 2-27
Exit command
  ODT — ODT 2-11

.EXIT directive — MCR Operations 4-36
  example — MCR Operations 4-36
  format — MCR Operations 4-36
Exit If directive — Executive 5-67
Exit option
  ACNT — System Management 2-8
Exit status
  Indirect — MCR Operations 4-10, 4-51
Exit Status Code
  definition — Batch and Queue Gloss-4
Exit switch — Crash Dump Analyzer 2-7
Exit With Status directive — Executive 5-71
EXIT$S directive — Executive 5-69
  Program Development 2-7
EXIT/SEQUENCE
  VFC format — EDT Editor 6-4
Expanded string
  See ESA field in NAM block
EXPANSIONS argument — PDP-11 MACRO-11 8-11
Explicit prompt — Introduction 1-5, Gloss-12, Gloss-25
Expression — ODT 2-3
  absolute — PDP-11 MACRO-11 3-17
  complex relocatable — PDP-11 MACRO-11 3-18
  evaluating — ODT 2-3, 7-2
  evaluation of — PDP-11 MACRO-11 3-16 to 3-18
  external — PDP-11 MACRO-11 3-17
  format — ODT 2-2
  numeric — MCR Operations 4-14
    evaluating — MCR Operations 4-15
    signed arithmetic in — MCR Operations 4-33
  Radix-50 — ODT 7-4
  relocatable — PDP-11 MACRO-11 3-17
  string — MCR Operations 4-16
Expression indicator
  immediate — PDP-11 MACRO-11 3-2
$EXRQP routine — Writing I/O Driver 5-9
EXST$ — Executive 5-71
<EXSTAT> symbol — MCR Operations 4-10
<EXSTRI> symbol — MCR Operations 4-13
EXT command — EDT Editor 8-10
/EXT keyword
  HOME command — MCR Operations 3-72
  INI command — MCR Operations 3-79
  MOUNT command — MCR Operations 3-119
Extend access — MCR Operations 2-3
$EXTEND macro — RMS-11 Macros 5-46
  RSTS/E — RMS-11 Macros D-4
EXTEND operation — RMS-11 Introduction 4-2
  RMS-11 User's Guide 1-18
  RMS-11 Macros 3-8
  and shared access — RMS-11 User's Guide 2-6
  BDB requirement — RMS-11 Macros 2-8
  $EXTEND macro — RMS-11 Macros 5-46
  I/O buffer requirement — RMS-11 Macros 2-7
  wildcard loop — RMS-11 Macros 3-10
/EXTEND qualifier
  BRU utility — Utilities 7-16
Extend size
  default — I/O Operations 2-8
  volume default — I/O Operations 2-8
Extend Task directive — Executive 5-73
  to improve performance — Task Builder F-2
Extended arithmetic element
  See EAE
Extended attribute block
  See XAB

Extended instruction set
  See EIS
EXTENSION
  RMSDES utility
    area section — RMS-11 Utilities 2-45
    file section — RMS-11 Utilities 2-32
Extension
  file
    See File type
Extension header — I/O Operations F-6
EXTENSIONS argument — PDP-11 MACRO-11 8-11
External expression — PDP-11 MACRO-11 3-17
External file (RMSDES)
  See Data file, Description file
External symbol
  See Global symbol
EXTK$ — Executive 5-73
.EXTND — I/O Operations 4-21
  control bits for — I/O Operations 4-23 to 4-24
  effect of on F.CNTG — I/O Operations 2-7
EXTSCT option — Task Builder 11-14
EXTSCT Task-build command
  to extend FSR size — I/O Operations 2-40
$EXTSK (Extend task) — System Library 8-13
EXTTSK option — Task Builder 11-15

F

F command — ODT 2-9, 6-4
^F operator — PDP-11 MACRO-11 3-5, 6-35 to 6-36
F register — ODT 2-6, 5-3
/F switch — Error Logging 3-5
F$-family macro — RMS-11 Macros 2-9
  declaring — RMS-11 Macros C-1
  example — RMS-11 Macros 7-3, 7-7, 7-11, 7-15
F.ALOC
  See Extend size
F.CNTG — I/O Operations 2-6 to 2-7
F.DFNB — I/O Operations 2-14
F.DSPT — I/O Operations 2-13
F.FACC — I/O Operations 2-14
F.MBCT — I/O Operations 2-18
F.RACC
  See FDB
F.RATT — I/O Operations 2-6
F11ACP — I/O Operations F-6; RMS-11 Introduction 2-1; RMS-11 User's Guide 8-13
  role of
    in I/O data structure — Writing I/O Driver 2-19
F11DF$ — Crash Dump Analyzer B-15
F4POTS.OLB (FORTRAN IV and FORTRAN IV-PLUS library) — Program Development 1-11
/FA switch
  FLX utility — Utilities 4-5
FAB — RMS-11 Introduction 4-8
  chaining to RAB — RMS-11 Macros 2-13
  declaring — RMS-11 Macros 2-8
  initializing — RMS-11 Macros 2-9
  summary — RMS-11 Macros 6-22
FAB field in RAB — RMS-11 Macros 4-2
  chaining FAB to RAB — RMS-11 Macros 2-13
  CONNECT operation — RMS-11 Macros 5-6
  offset — RMS-11 Macros 6-115
  summary — RMS-11 Macros 6-120

FAB$B macro — RMS-11 Macros 2-8, C-1
  example — RMS-11 Macros 7-3, 7-7, 7-11, 7-15
FAB$BT macro — RMS-11 Macros C-1
FAB$E macro — RMS-11 Macros 2-9
  declaring — RMS-11 Macros C-1
  example — RMS-11 Macros 7-3, 7-7, 7-11, 7-15
FABOF$ macro — RMS-11 Macros C-1
FAC field in FAB
  CREATE operation — RMS-11 Macros 5-14
  offset — RMS-11 Macros 6-22
  OPEN operation — RMS-11 Macros 5-75
  summary — RMS-11 Macros 6-37
Facilities-declaration macro — RMS-11 Macros 2-2
  declaring — RMS-11 Macros C-2
Factor
  autoloadable
    making first component of — Task Builder 4-3
FAL — RMS-11 User's Guide B-1
  RSTS/E — RMS-11 User's Guide B-1, B-3
  RSX-11M/M-PLUS — RMS-11 User's Guide B-3
  VAX/VMS — RMS-11 User's Guide B-3
<FALSE> symbol — MCR Operations 4-9
Fast deletion
  See RB$FDL mask in ROP field
Fast Task Builder — Command Language 6-70 to 6-71; Task Builder G-1
  See also FTB
  speed of — Task Builder G-2
  supported
    features — Task Builder G-1 to G-2
    options — Task Builder G-2
    switches — Task Builder G-1
  unsupported features — Task Builder G-1 to G-2
Fatal error — RMS-11 Macros 2-15
Fault code — Writing I/O Driver 3-26
Fault isolation — Writing I/O Driver 3-20 to 3-23
Fault tracing — Writing I/O Driver 3-23 to 3-24
  after unintended loop — Writing I/O Driver 3-28
  Executive stack and register dump — Writing I/O Driver 3-25 to 3-27
  hints — Writing I/O Driver 3-28 to 3-29
  in new driver — Writing I/O Driver 3-28
  when processor halts without display — Writing I/O Driver 3-27
/FB switch
  FLX utility — Utilities 4-5
FB$-family symbol
  declaring — RMS-11 Macros C-1
FB$BID code in BID field
  summary — RMS-11 Macros 6-26
  value — RMS-11 Macros 6-22
FB$BLK mask in RAT field
  CREATE operation — RMS-11 Macros 5-11
  OPEN operation — RMS-11 Macros 5-78
  summary — RMS-11 Macros 6-60
  value — RMS-11 Macros 6-23
FB$BLN code in BLN field
  summary — RMS-11 Macros 6-28
  value — RMS-11 Macros 6-22
FB$CCL mask in DEV field — RMS-11 Macros 3-1
  CREATE operation — RMS-11 Macros 5-20
  ENTER operation — RMS-11 Macros 5-37
  ERASE operation — RMS-11 Macros 5-42
  OPEN operation — RMS-11 Macros 5-77
  PARSE operation — RMS-11 Macros 5-88

FB$CCL mask in DEV field (Cont.)
REMOVE operation RMS-11 Macros 5-104
RENAME operation RMS-11 Macros 5-111
SEARCH operation RMS-11 Macros 5-117
value RMS-11 Macros 6-24
FB$CR mask in RAT field
CREATE operation RMS-11 Macros 5-12
OPEN operation RMS-11 Macros 5-78
value RMS-11 Macros 6-23
FB$CTG mask in FOP field
CREATE operation RMS-11 Macros 5-18
EXTEND operation RMS-11 Macros 5-46
OPEN operation RMS-11 Macros 5-78
RSTS/E RMS-11 Macros D-4
summary RMS-11 Macros 6-40
value RMS-11 Macros 6-23
FB$DEL mask in FAC field
CREATE operation RMS-11 Macros 5-14
OPEN operation RMS-11 Macros 5-75
value RMS-11 Macros 6-22
FB$DFW mask in FOP field
CREATE operation RMS-11 Macros 5-15
OPEN operation RMS-11 Macros 5-76
summary RMS-11 Macros 6-41
value RMS-11 Macros 6-23
FB$DLK mask in FOP field
CREATE operation RMS-11 Macros 5-15
OPEN operation RMS-11 Macros 5-76
summary RMS-11 Macros 6-42
value RMS-11 Macros 6-23
FB$FID mask in FOP field RMS-11 Macros 3-7, 3-9 to 3-11
CREATE operation RMS-11 Macros 5-10
ENTER operation RMS-11 Macros 5-36
ERASE operation RMS-11 Macros 5-41
OPEN operation RMS-11 Macros 5-73 to 5-74
REMOVE operation RMS-11 Macros 5-103
RENAME operation RMS-11 Macros 5-109 to 5-110
summary RMS-11 Macros 6-43
value RMS-11 Macros 6-23
FB$FIX code in RFM field
CREATE operation RMS-11 Macros 5-11
OPEN operation RMS-11 Macros 5-78
value RMS-11 Macros 6-23
FB$FTN mask in RAT field
CREATE operation RMS-11 Macros 5-12
OPEN operation RMS-11 Macros 5-78
value RMS-11 Macros 6-23
FB$GET mask in FAC field
CREATE operation RMS-11 Macros 5-14
OPEN operation RMS-11 Macros 5-75
value RMS-11 Macros 6-22
FB$GET mask in SHR field
CREATE operation RMS-11 Macros 5-14
OPEN operation RMS-11 Macros 5-75
value RMS-11 Macros 6-22
FB$IDX code in ORG field
CREATE operation RMS-11 Macros 5-11
OPEN operation RMS-11 Macros 5-78
value RMS-11 Macros 6-23
FB$MDI mask in DEV field RMS-11 Macros 3-1
CREATE operation RMS-11 Macros 5-20
ENTER operation RMS-11 Macros 5-37
ERASE operation RMS-11 Macros 5-42
OPEN operation RMS-11 Macros 5-77
PARSE operation RMS-11 Macros 5-88
REMOVE operation RMS-11 Macros 5-104
RENAME operation RMS-11 Macros 5-111

FB$MDI mask in DEV field (Cont.)
SEARCH operation RMS-11 Macros 5-117
value RMS-11 Macros 6-24
FB$MKD mask in FOP field
CREATE operation RMS-11 Macros 5-11
summary RMS-11 Macros 6-44
value RMS-11 Macros 6-23
FB$NEF mask in FOP field
OPEN operation RMS-11 Macros 5-76
RSTS/E RMS-11 Macros D-4
summary RMS-11 Macros 6-45
value RMS-11 Macros 6-23
FB$NIL mask in SHR field
CREATE operation RMS-11 Macros 5-14
OPEN operation RMS-11 Macros 5-75
value RMS-11 Macros 6-22
FB$POS mask in FOP field
CREATE operation RMS-11 Macros 5-15
summary RMS-11 Macros 6-46
value RMS-11 Macros 6-23
FB$PRN mask in RAT field
CREATE operation RMS-11 Macros 5-12
OPEN operation RMS-11 Macros 5-78
value RMS-11 Macros 6-23
FB$PUT mask in FAC field
CREATE operation RMS-11 Macros 5-14
OPEN operation RMS-11 Macros 5-75
value RMS-11 Macros 6-22
FB$REA mask in FAC field
CREATE operation RMS-11 Macros 5-14
OPEN operation RMS-11 Macros 5-75
value RMS-11 Macros 6-22
FB$REC mask in DEV field RMS-11 Macros 3-1 to 3-2
CREATE operation RMS-11 Macros 5-20
ENTER operation RMS-11 Macros 5-37
ERASE operation RMS-11 Macros 5-42 to 5-43
OPEN operation RMS-11 Macros 5-77
PARSE operation RMS-11 Macros 5-88
REMOVE operation RMS-11 Macros 5-104
RENAME operation RMS-11 Macros 5-111
SEARCH operation RMS-11 Macros 5-117 to 5-118
value RMS-11 Macros 6-24
FB$REL code in ORG field
CREATE operation RMS-11 Macros 5-11
OPEN operation RMS-11 Macros 5-78
value RMS-11 Macros 6-23
FB$RWC mask in FOP field
CLOSE operation RMS-11 Macros 5-4
CREATE operation RMS-11 Macros 5-15
OPEN operation RMS-11 Macros 5-77
SEARCH operation RMS-11 Macros 5-117
summary RMS-11 Macros 6-47
value RMS-11 Macros 6-23
FB$RWO mask in FOP field
CREATE operation RMS-11 Macros 5-15
OPEN operation RMS-11 Macros 5-76
SEARCH operation RMS-11 Macros 5-117
summary RMS-11 Macros 6-48
value RMS-11 Macros 6-23
FB$SDI mask in DEV field RMS-11 Macros 3-2
CREATE operation RMS-11 Macros 5-20
ENTER operation RMS-11 Macros 5-37
ERASE operation RMS-11 Macros 5-43
OPEN operation RMS-11 Macros 5-77
PARSE operation RMS-11 Macros 5-88
REMOVE operation RMS-11 Macros 5-104
RENAME operation RMS-11 Macros 5-111

FB$SDI mask in DEV field (Cont.)
  SEARCH operation RMS-11 Macros 5-118
  value RMS-11 Macros 6-24
FB$SEQ code in ORG field
  CREATE operation RMS-11 Macros 5-11
  OPEN operation RMS-11 Macros 5-78
  value RMS-11 Macros 6-23
FB$SQD mask in DEV field RMS-11 Macros 3-2
  CREATE operation RMS-11 Macros 5-20
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-77
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-104
  RENAME operation RMS-11 Macros 5-111
  SEARCH operation RMS-11 Macros 5-118
  value RMS-11 Macros 6-24
FB$STM code in RFM field
  CREATE operation RMS-11 Macros 5-11
  OPEN operation RMS-11 Macros 5-78
  value RMS-11 Macros 6-23
FB$SUP mask in FOP field
  CREATE operation RMS-11 Macros 5-10
  summary RMS-11 Macros 6-49
  value RMS-11 Macros 6-23
FB$TMD mask in FOP field
  CREATE operation RMS-11 Macros 5-11
  value RMS-11 Macros 6-23
FB$TMP mask in FOP field
  CREATE operation RMS-11 Macros 5-11
  summary RMS-11 Macros 6-50
  value RMS-11 Macros 6-23
FB$TRM mask in DEV field RMS-11 Macros 3-1
  CREATE operation RMS-11 Macros 5-20
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-42
  OPEN operation RMS-11 Macros 5-77
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-104
  RENAME operation RMS-11 Macros 5-111
  SEARCH operation RMS-11 Macros 5-117
  value RMS-11 Macros 6-24
FB$TRN mask in FAC field
  CREATE operation RMS-11 Macros 5-14
  OPEN operation RMS-11 Macros 5-75
  value RMS-11 Macros 6-22
FB$UDF code in RFM field
  CREATE operation RMS-11 Macros 5-11
  OPEN operation RMS-11 Macros 5-78
  value RMS-11 Macros 6-23
FB$UPD mask in FAC field
  CREATE operation RMS-11 Macros 5-14
  OPEN operation RMS-11 Macros 5-75
  value RMS-11 Macros 6-22
FB$UPI mask in SHR field
  CREATE operation RMS-11 Macros 5-14
  OPEN operation RMS-11 Macros 5-75
  value RMS-11 Macros 6-22
FB$UPI mask in SHR field of FAB
  RSX-11 RMS-11 Macros D-4
FB$VAR code in RFM field
  CREATE operation RMS-11 Macros 5-11
  OPEN operation RMS-11 Macros 5-78
  value RMS-11 Macros 6-23
FB$VFC code in RFM field
  CREATE operation RMS-11 Macros 5-11
  OPEN operation RMS-11 Macros 5-78

FB$VFC code in RFM field (Cont.)
  value RMS-11 Macros 6-23
FB$WRI mask in SHR field
  CREATE operation RMS-11 Macros 5-14
  OPEN operation RMS-11 Macros 5-75
  value RMS-11 Macros 6-22
FB$WRT mask in FAC field
  CREATE operation RMS-11 Macros 5-14
  OPEN operation RMS-11 Macros 5-75
  value RMS-11 Macros 6-22
$FBCAL macro RMS-11 Macros C-2
/FC switch
  FLX utility Utilities 4-7
FCB RMS-11 User's Guide 8-12
  role of
    in I/O data structure Writing I/O Driver 2-20
FCP
  definition System Generation (11M) 1-4
  option System Generation (11M) 4-57
  role of
    in I/O data structure Writing I/O Driver 2-19
  support System Generation (11M) 4-22
  user-written System Generation (11M) 4-59
FCPLRG System Generation (11M) 4-58
FCPMDL System Generation (11M) 4-58
FCPMIN System Generation (11M) 4-57
FCPSML System Generation (11M) 4-58
FCS I/O Operations 4-1
Introduction 5-12, Gloss-12
  characteristics of I/O Operations 1-12
  conditional assembly parameters I/O Operations K-1 to K-2
  definition System Generation (11M) 1-3
  library descriptions I/O Operations K-1
  library options I/O Operations K-1
  PLAS resident library System Generation (11M) 4-57
  position of
    in I/O hierarchy Writing I/O Driver 2-2
  RSX-11S subset System Generation (11S) 2-23
    library
      resident System Generation (11S) 4-13
      system object System Generation (11S) 4-12
    using System Generation (11S) 2-26
  tasks that use System Generation (11M) 7-1
FCS impure area
  allocating I/O Operations 2-37
FCS macro
  declaring I/O Operations 2-3
FCS routine
  error return I/O Operations 4-2
  list of I/O Operations 4-2
FCS-11
  sequential file compatibility RMS-11 User's Guide 3-2
FCSMC$ I/O Operations 2-3
FCSRES
  linking tasks to System Generation (11M) 7-4
.FCTR directive Task Builder 3-24
  argument
    library modules Task Builder 3-25
    library to resolve references Task Builder 3-25
    named input file Task Builder 3-24
    PSECT name Task Builder 3-25
    segment name Task Builder 3-25
  arguments for Task Builder 3-24
  use of label in Task Builder 3-24
.FCTR statement
  allocation diagram
    creating from Task Builder 3-37 to 3-38

.FCTYP values I/O Operations K-2
FD.BLK
  See Record attribute
FD.CR
  See Record attribute
FD.FTN
  See Record attribute
FD.PRN
  See Record attribute
FDB I/O Operations 1-10, A-1
  block access section I/O Operations 2-10
  block buffer section I/O Operations A-2
  definition of I/O Operations 1-10
  file attribute section I/O Operations A-2
  file open section I/O Operations A-2
  format I/O Operations A-1 to A-2
  GET$ I/O Operations 3-20
  offset definitions I/O Operations A-3 to A-8
    I/O Operations A-5
  offsets I/O Operations A-1
  PUT$ I/O Operations 3-26
  READ$ I/O Operations 3-34
  record access section I/O Operations 2-8
  record or block access section I/O Operations A-2
  WRITE$ I/O Operations 3-35
FDB information I/O Operations 2-2
  macro calls I/O Operations 2-2
FDB macro
  initializing I/O Operations 2-3
FDBDF$ I/O Operations 2-5
FDBF$A
  using with big buffer I/O Operations 1-8
FDBF$A macro call
  format I/O Operations 2-17
FDBF$R
  using with big buffer I/O Operations 1-8
FDBK$A I/O Operations 2-10
  format I/O Operations 2-11
  parameters I/O Operations 2-11
FDBK$R
  compatability with FDBK$A I/O Operations 2-11
FDRC$A
  format I/O Operations 2-8
/FDX keyword
  SET command MCR Operations 3-179
    VMR System Management 10-49
$FETCH macro RMS-11 Macros 2-15
  example RMS-11 Macros 7-3, 7-7, 7-11,
    7-15
FF command
  EDI editor Utilities 2-34
/FF switch
  CMP utility Utilities 12-3
/FI switch
  DMP utility Utilities 11-5
  PIP utility Utilities 3-22
  QUE /DEL command Batch and Queue 2-11
  QUE /MOD command Batch and Queue 2-21
FID field in NAM block
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-36
  ERASE operation RMS-11 Macros 5-41 to 5-42
  offset RMS-11 Macros 6-94
  OPEN operation RMS-11 Macros 5-73, 5-77
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111

FID field in NAM block (Cont.)
  SEARCH operation RMS-11 Macros 5-118
  summary RMS-11 Macros 6-100
Field RMS-11 Macros 1-2
  clearing bits in RMS-11 Macros 2-11
  comparing value RMS-11 Macros 2-16
  copying value from RMS-11 Macros 2-15
  copying value into RMS-11 Macros 2-10
  examining RMS-11 Macros 2-15
  file specification Introduction 1-14
  initializing RMS-11 Macros 2-8
  mnemonic RMS-11 Macros 1-2
  setting bits in RMS-11 Macros 2-11
  setting up RMS-11 Macros 2-10
  testing bits in RMS-11 Macros 2-17
Field size symbol I/O Operations J-1
Field terminator PDP-11 MACRO-11 3-2
Field-access macro
  $COMPARE RMS-11 Macros 2-16
  declaring RMS-11 Macros C-2
  $FETCH RMS-11 Macros 2-15
  $OFF RMS-11 Macros 2-11
  $SET RMS-11 Macros 2-11
  $STORE RMS-11 Macros 2-10
  $TESTBITS RMS-11 Macros 2-17
Field-initialization macro RMS-11 Macros 2-9
  declaring
    ALL block RMS-11 Macros C-3
    DAT block RMS-11 Macros C-3
    FAB RMS-11 Macros C-1
    KEY block RMS-11 Macros C-3
    NAM block RMS-11 Macros C-2
    PRO block RMS-11 Macros C-3
    RAB RMS-11 Macros C-2
    SUM block RMS-11 Macros C-3
Field-offset symbol
  declaring
    ALL block RMS-11 Macros C-3 to C-4
    DAT block RMS-11 Macros C-3 to C-4
    FAB RMS-11 Macros C-1
    KEY block RMS-11 Macros C-3 to C-4
    NAM block RMS-11 Macros C-2
    PRO block RMS-11 Macros C-3 to C-4
    RAB RMS-11 Macros C-2
    SUM block RMS-11 Macros C-3 to C-4
    XAB RMS-11 Macros C-4
  value
    ALL block RMS-11 Macros 6-2
    DAT block RMS-11 Macros 6-14
    FAB RMS-11 Macros 6-22
    KEY block RMS-11 Macros 6-67
    NAM block RMS-11 Macros 6-94
    PRO block RMS-11 Macros 6-108
    RAB RMS-11 Macros 6-115
    SUM block RMS-11 Macros 6-145
$FIL
  predefined syntax element in
      MML System Management 12-41
/FIL keyword
  HELP command MCR Operations 3-65
<FILATR> symbol MCR Operations 4-13
$FILE
  predefined syntax element in
      MML System Management 12-41

File — Introduction 1-14, 2-1, 2-16, 3-1, 3-12, Gloss-13; Command Language 4-1; MCR Operations 2-1; RMS-11 Introduction 1-1; RMS-11 User's Guide 1-2
  See also Account file
  See also Indexed file organization
  See also Relative file organization
  See also Sequential file organization
  access code
    assigning — MCR Operations 2-3
    type — MCR Operations 2-3
    user group — MCR Operations 2-3
  access requested
    See FAC field in FAB
  access shared
    See SHR field in FAB
  accessing — MCR Operations 2-2
  account
    setting up — MCR Operations 2-24
  alignment
    See ALN field in ALL block
  allocation
    See ALQ field in ALL block
    See ALQ field in FAB
  appending
    PIP utility — Utilities 3-14
  area
    See ALL block
  assembler work — PDP-11 MACRO-11 F-1
  attributes — RMS-11 Introduction 5-1; RMS-11 User's Guide 1-2
  backing up — RMS-11 Introduction 5-3; RMS-11 User's Guide 1-10, 1-12
  bucket size
    See BKS field in FAB
    See BKZ field in ALL block
  chaining to — MCR Operations 4-28
  checkpoint — Command Language 5-11, 5-65, 5-74, 6-68
    allocating — MCR Operations 3-8
      number of blocks — MCR Operations 3-8
    discontinuing — MCR Operations 3-8
      example — MCR Operations 3-8
    freeing — MCR Operations 3-9
  closing — I/O Operations 3-17
    See CLOSE operation
  cluster size
    See RTV field in FAB
  command
    level of indirection — Task Builder 1-7
  comparing
    CMP utility — Utilities 12-1
  contiguity
    See FB$CTG mask in FOP field
    See XB$CTG mask in AOP field
  contiguous — Introduction 4-8
  control directive — PDP-11 MACRO-11 6-57 to 6-58
  converting — RMS-11 User's Guide 1-10, 1-12
  copying — Introduction 3-7
    BRU utility — Utilities 7-1
    DOS-11 — Utilities 4-3
    DSC utility — Utilities 8-1

File
  copying (Cont.)
    Files-11 Utilities 3-8
    FLX utility Utilities 4-3
    PIP utility Utilities 3-8
    RT-11 Utilities 4-3
  copying text into EDT Editor 7-3, 7-22
  creating I/O Operations 3-4, 3-7
    Introduction 2-1, 2-16
    RMS-11 Introduction 5-1 to 5-2
    RMS-11 User's Guide 1-10, 1-12
    See also CREATE operation
    EDI editor Utilities 2-2
    source Program Development 2-9 to 2-10
  creation date
    See CDT field in DAT block
  date
    See DAT block
  declaring number of active Task Builder 11-6
  default extension size
    See DEQ field in ALL block
    See DEQ field in FAB
  deleting I/O Operations 3-38, 4-23
    Introduction 3-9 to 3-10
    See also ERASE operation
    PIP utility Utilities 3-17
  deleting by filename block I/O Operations 4-24
  deleting wildcard I/O Operations 4-15
  design RMS-11 Introduction 3-15, 5-1
    RMS-11 User's Guide 1-10, 1-12
  determining existence of MCR Operations 4-53
  directory listing Program Development 3-9
  displaying RMS-11 Introduction 5-3
    RMS-11 User's Guide 1-10, 1-12
    block number
      PIP utility Utilities 3-25
  distribution kit System Generation (11S) 3-2
  dumping
    DMP utility Utilities 11-1
  editing
    EDI editor Utilities 2-1
    source Program Development 2-9, 2-12 to 2-18
  error log
    inserting text MCR Operations 3-212
  exiting from MCR Operations 4-42
  extending I/O Operations 4-21
    MCR Operations 3-79, 3-119
    default size
      specifying MCR Operations 3-72
  extending allocation
    See EXTEND operation
  FORTRAN direct access
    See FLX utility
  header Introduction 3-6, 4-8, Gloss-13
    MCR Operations 2-2
  help
    calling other files MCR Operations 3-67
    contents
      displaying MCR Operations 3-65
    default MCR Operations 3-65
    example MCR Operations 3-68
    format MCR Operations 3-66
      level number MCR Operations 3-66
    qualifier
      synonymous MCR Operations 3-67
  identifier

File
  identifier (Cont.)
    See FID field in NAM block
  index
    accessing — MCR Operations 3-125
    header
      allocating — MCR Operations 3-80
    LBN
      specifying — MCR Operations 3-80
    listing contents
      VFY utility — Utilities 9-6
    multiheader — MCR Operations 3-81
  indirect command — Task Builder 1-5
    See also Indirect command file
  input — Introduction 4-5, Gloss-17
    designating as debugging aid — Task Builder 10-14
    designating as library file — Task Builder 10-23
    directing selective symbol search — Task Builder 10-47 to 10-49
    including content of in map — Task Builder 10-26
    processing to reduce overhead — Task Builder F-6
    specifying as default library — Task Builder 10-15
  internal file identifier
    See IFI field in FAB
  library
    declaring a — Task Builder 10-23
    LBR utility — Utilities 10-2
  listing — Program Development 3-6
    FLX utility — Utilities 4-7
    LBR utility — Utilities 10-21
    PIP utility — Utilities 3-24
  loading — RMS-11 Introduction 5-2; RMS-11 User's Guide 1-10, 1-12
  location
    See LOC field in ALL block
  locked — Command Language 4-75 to 4-76, 9-47
  locking
    See FB$DLK mask in FOP field
  login-text — MCR Operations 3-60
  lost
    recovering
      VFY utility — Utilities 9-6
  MACRO-11 default specification — PDP-11 MACRO-11 8-3 to 8-6
  maintaining — RMS-11 User's Guide 1-10, 1-12
  making file autoloadable
    using name — Task Builder 4-2
  map
    printing — Task Builder 1-2
  maximum number of
    specifying — MCR Operations 3-73, 3-82
  merging
    PIP utility — Utilities 3-9
  multiple — EDT Editor 1-8, 2-32
  name — Introduction 1-14, 3-8, 3-11; MCR Operations 2-4
    special character in — MCR Operations 2-4
  name block
    See NAM block
  non-RMS-11 — RMS-11 Introduction 3-4
  object — Introduction 4-3, 4-5 to 4-9, 4-11 to 4-12, Gloss-22
  ODL — RMS-11 User's Guide 8-3, 8-5
  omitting a specific output — Task Builder 1-3
  open at one time — Task Builder 11-6
  opening
    See OPEN operation

File (Cont.)
  opening an existing — I/O Operations 3-4, 3-8
  opening by filename block — I/O Operations 3-14
  organization
    See ORG field in FAB
  output — Introduction 4-6, 4-10, Gloss-23
  owner — MCR Operations 2-2
    See PRG field in PRO block
  owning
    PIP utility — Utilities 3-11
  positioning — I/O Operations 4-18 to 4-19
  printing — Program Development 3-8 to 3-9
  processing — RMS-11 Introduction 4-1
    RMS-11 User's Guide 1-16
    control routine — System Generation (11S) 2-25
    delaying — MCR Operations 4-30
    macro call — System Generation (11S) 2-23
    terminating — MCR Operations 4-42 to 4-43
  protecting — MCR Operations 2-2, 3-72, 3-80, 3-120
    Files-11
      PIP utility — Utilities 3-29
  protection — Introduction 3-6, 5-6, Gloss-25 to Gloss-26
    Command Language 4-9
    See also PRO field in PRO block
  purging — Introduction 3-9 to 3-10
    Program Development 3-9 to 3-10
    PIP utility — Utilities 3-31
  record-output characteristic
    See RAT field in FAB
  renaming — I/O Operations 4-20
    Introduction 3-8
    See also RENAME operation
    PIP utility — Utilities 3-33
  restoring — EDT Editor 3-1
    RMS-11 Introduction 5-3
    RMS-11 User's Guide 1-10, 1-12
  revising — EDT Editor 2-28
  revision date
    See RDT field in DAT block
  revision number
    See RVN field in DAT block
  rewinding — I/O Operations 4-18
  saving
    BRU utility — Utilities 7-1
    DSC utility — Utilities 8-1
  secondary
    appending data to — MCR Operations 4-44
    closing — MCR Operations 4-29
    opening — MCR Operations 4-44
      for reading — MCR Operations 4-45
    outputting text to — MCR Operations 4-29
  source — Introduction 2-1, 4-3, 4-5, Gloss-30
  specification — RMS-11 Introduction 4-1
    convention for — Task Builder 1-8
    default for — Task Builder 1-8
  specification string
    See FNA field in FAB
    default
      See DNA field in FAB
    parsing
      See FNB field in NAM block
  specifying — Utilities 1-4
    ANSI
      quotation marks in — MCR Operations 1-2

File
  specifying (Cont.)
    default — MCR Operations 2-7
    example — MCR Operations 2-9
    format — MCR Operations 2-4
    VMR — System Management 10-3
    wildcard — MCR Operations 2-6
  spooling — Program Development 1-8, 3-8 to 3-9
    PIP utility — Utilities 3-38
  string
    See FNA field in FAB
  structure — RMS-11 Introduction 3-1
  supersession
    See FB$SUP mask in FOP field
  symbol definition — System Management 10-2
    overriding — System Management 10-4
  system
    command — MCR Operations 3-57
      requirements — MCR Operations 3-58
    image
      determining minimum size — MCR Operations 3-157
  system image
    configuring — System Management 10-1
    Executive data space and — System Management 10-2
  task image — Introduction 2-1, 4-3, 4-8, 4-14, Gloss-33
  text — Introduction 2-1, Gloss-33
  transferring
    FLX utility — Utilities 4-1
  truncating
    See also TRUNCATE operation
    PIP utility — Utilities 3-40
  type — MCR Operations 2-4
    standard — MCR Operations 2-7
      list — MCR Operations 2-8
  universal library
    See Universal library file
  updating
    PAT utility — Utilities 14-1
    PIP utility — Utilities 3-42
    SLP utility — Utilities 13-1
    ZAP utility — Utilities 15-1
  validating contents
    PAT utility — Utilities 14-6
  version — MCR Operations 2-5
  wildcard context
    See WCC field in NAM block
  wildcard operation
    See NB$WCH mask in FNB field
  wildcard search
    See SEARCH operation
  window
    mapping pointer
      allocating — MCR Operations 3-74, 3-84, 3-127
File access — I/O Operations 3-16
  parameter to FDOP$A — I/O Operations 2-14
File access block
  See FAB
File access listener
  See FAL
File access privileges — I/O Operations 3-3
File allocation
  See Allocation
File attribute
  See also Attribute
  RMSDSP utility

File attribute
  RMSDSP utility (Cont.)
    indexed file
      detailed display — RMS-11 Utilities 5-4
File back-up date
  See Back-up date
FILe command
  EDI editor — Utilities 2-33
File Compare Utility
  See CMP utility
File contiguity
  See Contiguity
File Control Block
  See FCB
File Control Processor — RMS-11 Introduction 2-1, 4-3; RMS-11 User's Guide 1-16
  See also FCP
  retrieval pointers — RMS-11 User's Guide 8-11
  window turning — RMS-11 User's Guide 8-12
File Control Services
  See FCS
File creation date
  See Creation date
File Descriptor Block
  See FDB
File Dump Utility
  See DMP utility
File extension
  See File type
File header area
  characteristics — I/O Operations F-4
  file number — I/O Operations F-3
  file owner — I/O Operations F-4
  file protection — I/O Operations F-4
  file sequence number — I/O Operations F-3
  identification area — I/O Operations F-3
  map area offset — I/O Operations F-3
  structure level — I/O Operations F-4
  user file attributes — I/O Operations F-4
File header block — I/O Operations 5-3
  file header area — I/O Operations F-3
  format — I/O Operations F-1 to F-2
  identification area — I/O Operations F-4
  map area — I/O Operations F-5
  predefined — I/O Operations E-2
File ID
  opening file by — I/O Operations 2-33 to 2-34, 3-13
File identifier
  processing by Files-11 — I/O Operations G-6
File locking — I/O Operations 2-15
File name — Command Language 4-3
  default — RMS-11 User's Guide A-6
  file specification — RMS-11 User's Guide A-2
File operation — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-18; RMS-11 Macros 3-6
  See also Operation
File operation macro
  $CLOSE — RMS-11 Macros 5-3
  $CREATE — RMS-11 Macros 5-9
  declaring — RMS-11 Macros C-2
  $DISPLAY — RMS-11 Macros 5-29

File operation macro (Cont.)
  $ERASE RMS-11 Macros 5-40
  $EXTEND RMS-11 Macros 5-46
  $OPEN RMS-11 Macros 5-72
File organization RMS-11 Introduction 3-1, 3-4
RMS-11 User's Guide 1-11, 1-18
  See also Indexed file organization
  See also Relative file organization
  See also Sequential file organization
  and data storage RMS-11 User's Guide 2-5
  and file design RMS-11 User's Guide 2-11
  and optimizations RMS-11 User's Guide 8-10
  and record formats RMS-11 User's Guide 1-20, 2-15
  and standard ODL files RMS-11 User's Guide 8-5
  indexed RMS-11 Introduction 3-6
RMS-11 User's Guide 1-5, 1-11, 5-1, 6-1, 7-1
    alternate keys RMS-11 Introduction 3-7
    changeable keys RMS-11 Introduction 3-10
    duplicate keys RMS-11 Introduction 3-10
    index RMS-11 Introduction 3-7
    keys RMS-11 Introduction 3-6
    null keys RMS-11 Introduction 3-10
    primary key RMS-11 Introduction 3-7
    segmented keys RMS-11 Introduction 3-10
  random access
    to indexed files RMS-11 Introduction 3-15
    to relative files RMS-11 Introduction 3-15
    to sequential files RMS-11 Introduction 3-14
  relative RMS-11 Introduction 3-5
RMS-11 User's Guide 1-4, 1-11, 4-1
    cell RMS-11 Introduction 3-5
    RRN RMS-11 Introduction 3-6
  RMSDEF utility RMS-11 Utilities A-8
  selection RMS-11 User's Guide 2-11
  sequential RMS-11 Introduction 3-4
RMS-11 User's Guide 1-3, 1-11, 3-1
    user-provided interlocks RMS-11 User's Guide 2-7
  sequential access
    to indexed files RMS-11 Introduction 3-14
    to relative files RMS-11 Introduction 3-14
    to sequential files RMS-11 Introduction 3-14
File owner
  nonprivileged user I/O Operations 4-5
  privileged user I/O Operations 4-6
File owner word I/O Operations 4-5
  format I/O Operations 4-6
  reading I/O Operations 4-6
  writing I/O Operations 4-6
FILE PLACEMENT
  RMSDES utility RMS-11 Utilities 2-30
File processing RMS-11 Macros 3-1
  magtape I/O Operations 5-4
File protection Command Language 2-6, 4-9, 4-79 to 4-82, 5-28, 5-38, 5-51, 5-58, 9-33
File revision date
  See Revision date
File Set Identifier MCR Operations 3-116 to 3-117
  See also Fileset-ID
  overriding MCR Operations 3-122

File sharing
  See Shared access
File size
  in blocks
    specifying — System Management 4-61
File space (RMSIFL)
  calculating — RMS-11 Utilities 3-12
File specification — I/O Operations 2-27; Introduction 1-14, 2-2, 3-2, 3-4, 3-11 to 3-12, Gloss-13; Command Language 4-2 to 4-3; RMS-11 Introduction 4-1; RMS-11 User's Guide 1-18 to 1-19
  See also File
  See also Infile, Outfile
  default — Introduction 1-15; RMS-11 User's Guide A-6
    directory — RMS-11 User's Guide A-6
    name — RMS-11 User's Guide A-6
    node — RMS-11 User's Guide B-2
    type — RMS-11 User's Guide A-6
    version — RMS-11 User's Guide A-6
  default name string — RMS-11 User's Guide A-5 to A-6
  definition of — I/O Operations 1-11
  file name string — RMS-11 User's Guide A-5
  fully qualified — RMS-11 Macros 3-4
  magtape — RMS-11 User's Guide A-4 to A-5
    device — RMS-11 User's Guide A-4
    directory — RMS-11 User's Guide A-4
    quoted string — RMS-11 User's Guide A-5
    version — RMS-11 User's Guide A-5
  merged string — RMS-11 Macros 3-3
  NAM block — RMS-11 User's Guide A-6
  node — RMS-11 User's Guide B-2
  parsing
    See PARSE operation
  quoted string — RMS-11 User's Guide B-2
  remote — RMS-11 User's Guide B-2
  RMSBCK utility — RMS-11 Utilities 6-9
  RMSDEF utility — RMS-11 Utilities A-7
  RMSRST utility — RMS-11 Utilities 7-10
  standard — RMS-11 User's Guide A-1
    device — RMS-11 User's Guide A-1
    directory — RMS-11 User's Guide A-1
    name — RMS-11 User's Guide A-2
    type — RMS-11 User's Guide A-3
    version — RMS-11 User's Guide A-3
  wildcard — RMS-11 Introduction 4-1; RMS-11 User's Guide A-2 to A-3; RMS-11 Macros 3-8
File specifier
  See File specification
FILE statement — Error Logging 5-37 to 5-38
File Storage Region
  See FSR
File structure — I/O Operations 5-1
  See also Structure
  ANSI magtape — I/O Operations G-8
  user — I/O Operations 5-1
File Structure Verification Utility
  See VFY utility
File Transfer Utility
  See FLX utility

File truncation
  automatic — I/O Operations 4-22
  PUT$ — I/O Operations 2-9
File type — Introduction 1-14, 2-1, 3-11 to 3-12, 4-4 to 4-5, 4-7, Gloss-14 to Gloss-15; Command Language 4-3 to 4-5; RMS-11 User's Guide A-3
  default — RMS-11 User's Guide A-6
  .FTN — Program Development 7-3 to 7-4
  .LST — Program Development 3-4, 6-11, 7-3 to 7-4
  .MAC — Program Development 3-1
  .MAP — Program Development 4-6
  .MLB — Program Development 6-1
  .OBJ — Program Development 3-4, 7-5
  .OLB — Program Development 6-4
  parsing — I/O Operations 4-11 to 4-12
  .PMD — Program Development 5-10
  .TSK — Program Development 4-1
File version — RMS-11 User's Guide A-3, A-5
  0 — I/O Operations 4-16
  default — I/O Operations 4-16; RMS-11 User's Guide A-6
  parsing — I/O Operations 4-11 to 4-12
  special versions — I/O Operations 4-13
  wildcard — I/O Operations 4-16
File version number — Command Language 4-3
File-ID number — Introduction 3-6, Gloss-13
File-processing macro call — I/O Operations 3-1
  error handling — I/O Operations 3-2
File-structured device — Introduction 5-10 to 5-11, Gloss-13
  exercising
    IOX — System Management 4-3
FILE.MAC source code — Program Development 2-19 to 2-20
/FILE_POSITION file qualifier
  SET QUEUE command — Batch and Queue 2-21
/FILE_POSITION qualifier
  DELETE command — Batch and Queue 2-11
FILEA.MAC source code — Program Development 2-21 to 2-22
FILEB.MAC source code — Program Development 2-23 to 2-24
Filename
  parsing — I/O Operations 4-8, 4-11 to 4-12
Filename block
  ANSI format — I/O Operations B-5
  default directory — I/O Operations 4-17
  definition of — I/O Operations 1-11
  deleting by — I/O Operations 4-24
  directory information — I/O Operations 4-16
  format — I/O Operations B-1, B-3
  initializing — I/O Operations 2-35
  offset definitions — I/O Operations B-2
  offsets — I/O Operations B-1
  offsets for ANSI magtape — I/O Operations B-4
  opening by — I/O Operations 3-14
  status word — I/O Operations 4-11, B-3 to B-4
<FILERR> symbol — MCR Operations 4-11
Files
  source
    applying corrections to — Release Notes 1-40
/FILES qualifier
  SHOW QUEUE command — Batch and Queue 2-15

Files-11 — I/O Operations 5-1, E-1, F-5, G-3, G-6; Introduction 5-12, Gloss-13; Command Language 5-4; MCR Operations 2-1

- disk
  - selecting for testing
    - IOX — System Management 4-38
- disk structure
  - testing for a
    - IOX — System Management 4-63
- file
  - copying
    - FLX utility — Utilities 4-2
    - PIP utility — Utilities 3-8
  - protecting
    - PIP utility — Utilities 3-29
  - verifying structure — Utilities 9-1
- file identifier processing — I/O Operations G-6
- magtape — MCR Operations 2-1
- naming convention — I/O Operations G-3
- valid device — MCR Operations 2-1
- volume
  - bad block
    - entering — MCR Operations 3-78
    - marking — MCR Operations 3-77
  - directory
    - accessing — MCR Operations 3-72, 3-82, 3-121
  - home block
    - modifying — MCR Operations 3-71
  - initializing — MCR Operations 3-76
  - level — MCR Operations 3-82
  - mounting — MCR Operations 3-114
  - owner
    - specifying — MCR Operations 3-83 to 3-84
  - preparing — MCR Operations 2-1
  - protecting — MCR Operations 3-84, 3-123
  - protecting with TEMPORARYFILE
    - IOX — System Management 4-61
- volume exercise
  - example of
    - IOX — System Management 4-9

Files-11 ACP
- See FCP

FILES11 command
- IOX
  - default parameters — System Management 4-38

Fileset-ID — Command Language 5-12, 5-28, 5-38 to 5-40

Filespec — Command Language 4-2 to 4-3
- See also File specification

Filespec qualifier — Introduction Gloss-15, Gloss-27

Fill characters option — MCR Operations 3-181; System Management 10-50
- vertical — MCR Operations 3-206; System Management 10-64

Fill command — ODT 2-9, 6-4

FILL command (nokeypad) — EDT Editor 8-11

FILL function (keypad) — EDT Editor 5-49

Fill memory — ODT 6-4

Fill number
- data bucket
  - See DFL field in KEY block
- index bucket
  - See IFL field in KEY block
- RMSCNV utility — RMS-11 Utilities 4-10
- RMSDEF utility — RMS-11 Utilities A-16

Fill number (Cont.)
  RMSIFL utility — RMS-11 Utilities 3-6
Fill size
  See Bucket fill number
<FILSPC> symbol — MCR Operations 4-13
FIN argument to ORG$ macro — RMS-11 Macros 2-3
.FIND — I/O Operations 4-13 to 4-14
  effects of NB.ANS — I/O Operations 4-15
  wildcard operations — I/O Operations 4-13
FIND command — EDT Editor 7-8
  EDI editor — Utilities 2-33
  EDT — Introduction 2-13
FIND function (keypad) — EDT Editor 5-21
$FIND macro
  key access — RMS-11 Macros 5-51
  RFA access — RMS-11 Macros 5-54
  sequential access — RMS-11 Macros 5-49
FIND operation — RMS-11 Introduction 4-4
  RMS-11 User's Guide 1-15
  RMS-11 Macros 4-10
  access modes — RMS-11 Introduction 4-6
  and bucket locking — RMS-11 User's Guide 2-8
  and shared access — RMS-11 User's Guide 2-6, 2-10
  and stream records — RMS-11 User's Guide 2-16
  declaring with ORG$ macro — RMS-11 Macros 2-3
  deferred write — RMS-11 User's Guide 7-9
  $FIND macro
    key access — RMS-11 Macros 5-51
    RFA access — RMS-11 Macros 5-54
    sequential access — RMS-11 Macros 5-49
  indexed files — RMS-11 User's Guide 7-3
    key access — RMS-11 User's Guide 7-3
    random by key — RMS-11 User's Guide 5-13
    RFA access — RMS-11 User's Guide 7-3
    sequential access — RMS-11 User's Guide 5-17, 7-3
  key access — RMS-11 User's Guide 1-16
  relative files — RMS-11 User's Guide 4-8
    key access — RMS-11 User's Guide 4-8
    RFA access — RMS-11 User's Guide 4-8
    sequential access — RMS-11 User's Guide 4-8
  RFA access — RMS-11 User's Guide 1-16
  sequential access — RMS-11 User's Guide 1-16
  sequential files — RMS-11 User's Guide 3-7
    key access — RMS-11 User's Guide 3-7
    RFA access — RMS-11 User's Guide 3-7
    sequential access — RMS-11 User's Guide 3-7
FIND statement — Error Logging 5-39
Finding text
  keypad editing — EDT Editor 5-21
  line editing — EDT Editor 7-8
  nokeypad editing — EDT Editor 8-4
FINIT$ macro — I/O Operations 2-39
  format — I/O Operations 2-39
FINLM1 — Error Logging 4-6
FIS — System Generation (11M) 4-13
FIX command — Command Language 7-35 to 7-37, 9-16
  MCR Operations 3-53
  VMR — System Management 10-18
/FIX keyword
  INSTALL command
    VMR — System Management 10-22
FIX-IN-MEMORY command — MCR Operations 3-53
  command line format — MCR Operations 3-53
  error message — MCR Operations 3-54
  example — MCR Operations 3-54
  VMR — System Management 10-18

FIX-IN-MEMORY command
  VMR (Cont.)
    command line format — System Management 10-18
    example — System Management 10-19
Fixed and removable, single
    spindle disk — I/O Drivers 5-4A
Fixed control area
  RMSDEF utility — RMS-11 Utilities A-8
Fixed length record — I/O Operations 1-4
  magtape — I/O Operations 1-4
Fixed line number — EDT Editor 1-7, 6-3
  assigning — EDT Editor 6-1
  description — EDT Editor 6-1
  display — EDT Editor 6-4
  example — EDT Editor 6-5
Fixed task
  ODT — ODT 5-7
Fixed-control-size
  See FSZ field in FAB
Fixed-length record format — RMS-11 Introduction 3-2
  RMS-11 User's Guide 1-11, 2-15
  See also FB$FIX code in RFM field
/FL switch
  PRI command — Batch and Queue 2-5
FLA command — MCR Operations 3-55
  command line format — MCR Operations 3-55
  error message — MCR Operations 3-56
  example — MCR Operations 3-55
  keyword
    /CRE — MCR Operations 3-55
    /ELIM — MCR Operations 3-55
Flag
  event — Executive 2-2
  group global event — MCR Operations 3-55
    creating — MCR Operations 3-55
    displaying — MCR Operations 3-55
    eliminating — MCR Operations 3-55
  status
    task — Command Language 7-48
  task status
    displaying — MCR Operations 3-19
    list — MCR Operations 3-20
/FLAG_PAGE qualifier
  PRINT command — Batch and Queue 2-5
FLG field in KEY block
  CREATE operation — RMS-11 Macros 5-19
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-67
  OPEN operation — RMS-11 Macros 5-80
  summary
    XB$CHG mask — RMS-11 Macros 6-76
    XB$DUP mask — RMS-11 Macros 6-77
    XB$NUL mask — RMS-11 Macros 6-78
Floating instruction set
  See FIS
Floating Point Processor
  specifying — Task Builder 10-18
  See also FP11
Floating qualifier — Command Language 1-3 to 1-5
Floating-point
  directive — PDP-11 MACRO-11 6-35
    .FLT2 — PDP-11 MACRO-11 6-35
    .FLT4 — PDP-11 MACRO-11 6-35
  number — PDP-11 MACRO-11 6-33 to 6-34
  operation code — PDP-11 MACRO-11 C-4 to C-5
  processor — PDP-11 MACRO-11 3-14

Floating-point (Cont.)
  rounding — PDP-11 MACRO-11 6-34
    controlling — PDP-11 MACRO-11 6-19
  truncation — PDP-11 MACRO-11 6-34
    controlling — PDP-11 MACRO-11 6-19
  unary operator — PDP-11 MACRO-11 6-35 to 6-36
.FLT2 directive — PDP-11 MACRO-11 6-35
.FLT4 directive — PDP-11 MACRO-11 6-35
$FLUSH macro — RMS-11 Macros 5-56
FLUSH operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
  $FLUSH macro — RMS-11 Macros 5-56
  indexed files — RMS-11 User's Guide 7-5
  record stream — RMS-11 Macros 4-8
  relative files — RMS-11 User's Guide 4-10
  sequential files — RMS-11 User's Guide 3-9
FLX
  changes to — Release Notes 1-35
FLX utility — Command Language 5-12
  cassette — Utilities 4-13
    input file — Utilities 4-15
    multivolume support — Utilities 4-14
    output file — Utilities 4-14
    TA11/TU60 support — Utilities 4-13
  command line — Utilities 4-2
  device support — Utilities 4-2
  DOS-11 volume — Utilities 4-8
    deleting — Utilities 4-10
    directory listing — Utilities 4-8
    initializing — Utilities 4-10
    valid — Utilities 4-1
  error message — Utilities 4-17
  file
    deleting — Utilities 4-7
    Files-11 — Utilities 4-2
    specifying — Utilities 4-2
  FORTRAN direct access file — Utilities 4-16
  paper tape support — Utilities 4-15
  RT-11 volume — Utilities 4-10
    deleting — Utilities 4-12
    directory listing — Utilities 4-10
    initializing — Utilities 4-12
    valid — Utilities 4-2
  switch — Utilities 4-3
    control — Utilities 4-6
    transfer mode — Utilities 4-4
    volume format — Utilities 4-4
  volume
    directory listing — Utilities 4-7
    file deletion — Utilities 4-7
    file transfer — Utilities 4-4
    formatting — Utilities 4-4
    initializing — Utilities 4-2
  wildcard — Utilities 4-3
Flying installs — System Management 12-3
FM1NM1 — Error Logging 4-11
FM1WM1 — Error Logging 4-6, 4-11
FM2CM1 — Error Logging 4-6, 4-11
FM3CM1 — Error Logging 4-6, 4-11
FM4NM1 — Error Logging 4-6
FM4WM1 — Error Logging 4-6, 4-11
<FMASK> symbol — MCR Operations 4-13
FMT utility — Command Language 5-10, 5-12
  command line — Utilities 5-1
  device support — Utilities 5-5
  error message — Utilities 5-10
  indirect command file — Utilities 5-9

FMT utility (Cont.)
  initiating Utilities 5-1
  operation mode Utilities 5-2
  switch Utilities 5-7
    summary Utilities 5-1
  terminating Utilities 5-2
FMTBUF option Task Builder 11-16
FMTNP1 Error Logging 4-7
FN1NM1 Error Logging 4-6
FNA field in FAB RMS-11 Macros 3-3
  CREATE operation RMS-11 Macros 5-10
  ENTER operation RMS-11 Macros 5-36
  ERASE operation RMS-11 Macros 5-41
  offset RMS-11 Macros 6-24
  OPEN operation RMS-11 Macros 5-73
  PARSE operation RMS-11 Macros 5-87
  REMOVE operation RMS-11 Macros 5-103
  RENAME operation RMS-11 Macros 5-109 to 5-110
  summary RMS-11 Macros 6-38
$FNAM
  predefined syntax element in
      MML System Management 12-44
FNB field in NAM block RMS-11 Macros 3-3, 3-9 to 3-10
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37 to 5-38
  ERASE operation RMS-11 Macros 5-41, 5-43
  offset RMS-11 Macros 6-94
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-103, 5-105
  RENAME operation RMS-11 Macros 5-109, 5-111 to 5-112
  SEARCH operation RMS-11 Macros 5-116, 5-118
  summary RMS-11 Macros 6-101
    NB$WCH mask RMS-11 Macros 6-102
  wildcard loop RMS-11 Macros 3-10
FNDNXT function EDT Editor 5-23
  repeating EDT Editor 5-24
$FNDPG (Find page) System Library 8-27
$FNERL Error Logging 4-22
FNS field in FAB RMS-11 Macros 3-3
  CREATE operation RMS-11 Macros 5-10
  ENTER operation RMS-11 Macros 5-36
  ERASE operation RMS-11 Macros 5-41
  offset RMS-11 Macros 6-24
  OPEN operation RMS-11 Macros 5-73
  PARSE operation RMS-11 Macros 5-87
  REMOVE operation RMS-11 Macros 5-103
  RENAME operation RMS-11 Macros 5-109 to 5-110
  summary RMS-11 Macros 6-39
/FO job switch
  QUE /MOD command Batch and Queue 2-20
/FO keyword
  QUE /SP command
    MCR System Management 7-17
/FO switch
  PIP utility Utilities 3-11
  PRI command Batch and Queue 2-5
  QUE /LI command Batch and Queue 2-16
  RMSCNV utility RMS-11 Utilities 4-9, 4-15
FOP field in FAB RMS-11 Macros 3-7, 3-9 to 3-11
  CLOSE operation RMS-11 Macros 5-4
  CREATE operation RMS-11 Macros 5-10 to 5-11, 5-15, 5-18
  ENTER operation RMS-11 Macros 5-36
  ERASE operation RMS-11 Macros 5-41
  EXTEND operation RMS-11 Macros 5-46

FOP field in FAB (Cont.)
  offset — RMS-11 Macros 6-23
  OPEN operation — RMS-11 Macros 5-73 to 5-74, 5-76 to 5-78
  REMOVE operation — RMS-11 Macros 5-103
  RENAME operation — RMS-11 Macros 5-109 to 5-110
  SEARCH operation — RMS-11 Macros 5-117
  summary
    FB$CTG mask — RMS-11 Macros 6-40
    FB$DFW mask — RMS-11 Macros 6-41
    FB$DLK mask — RMS-11 Macros 6-42
    FB$FID mask — RMS-11 Macros 6-43
    FB$MKD mask — RMS-11 Macros 6-44
    FB$NEF mask — RMS-11 Macros 6-45
    FB$POS mask — RMS-11 Macros 6-46
    FB$RWC mask — RMS-11 Macros 6-47
    FB$RWO mask — RMS-11 Macros 6-48
    FB$SUP mask — RMS-11 Macros 6-49
    FB$TMP mask — RMS-11 Macros 6-50
FOR
  range specification — EDT Editor 6-10
FOR command
  MCR — Program Development 7-1, 7-4
FOR compiler task — Program Development 7-1
  creating object module — Program Development 7-5
  /D_LINES — Program Development 7-7
  /DE — Program Development 7-7
  debugging statements — Program Development 7-7
  diagnostic run — Program Development 7-3 to 7-4
  FOR command
    MCR — Program Development 7-1, 7-4
  FORTRAN command
    DCL — Program Development 7-1, 7-3
  .FTN file type — Program Development 7-3 to 7-4
  /LIST — Program Development 7-3, 7-7
  /NOOBJECT — Program Development 7-3
  /OBJECT — Program Development 7-3, 7-7
/FOR keyword
  MOUNT command — MCR Operations 3-120
<FORATT> symbol — MCR Operations 4-11
Foreign volume — Command Language 5-9 to 5-10, 5-12 to 5-13, 5-26, 5-29

FORK — Crash Dump Analyzer 4-2
Fork block
  storage words in SCB — Writing I/O Driver 4-23
Fork level — Executive 5-18
Fork level processing — Writing I/O Driver 2-15
Fork list — Writing I/O Driver 2-9
Fork process — Writing I/O Driver 2-9
  creating with $FORK — Writing I/O Driver 2-12
$FORK routine — Writing I/O Driver 5-10
  accessing shared driver data base — Writing I/O Driver 2-10
  initiating fork process — Writing I/O Driver 2-9
$FORK1 routine — Writing I/O Driver 5-11
Form
  special hardcopy — Batch and Queue 1-2
Form feed — Introduction Gloss-15
  hardware
    specifying — MCR Operations 3-180; System Management 10-50
  PAGE — EDT Editor 5-20
FORM FEED command
  EDI editor — Utilities 2-34
FORMAT
  RMSDES utility — RMS-11 Utilities 2-36

Format
  See also Record format
  assembler listing — PDP-11 MACRO-11 6-4
    control directive — PDP-11 MACRO-11 6-13 to 6-14
    line printer — PDP-11 MACRO-11 6-5 to 6-6
    teleprinter — PDP-11 MACRO-11 6-7 to 6-8
  assembler statement — PDP-11 MACRO-11 2-1
    control — PDP-11 MACRO-11 2-5
  FORTRAN IV
    statement — Program Development 7-3
  macro definition — PDP-11 MACRO-11 7-4
  MACRO-11
    source file — Program Development 2-1 to 2-3
      skeleton — Program Development 2-4
    statement — Program Development 2-3
  memory listing — ODT 6-5
  register — ODT 2-6, 5-3
  source line — PDP-11 MACRO-11 2-5
  Trace listing — ODT 8-2
Format control
  vertical
    line printer — I/O Drivers 10-5 to 10-6
    terminal — I/O Drivers 3-26 to 3-27
Format module — Error Logging 4-11
Format switch — Error Logging 3-5
  full report — Error Logging 3-15
  no report — Error Logging 3-19
  Register report — Error Logging 3-18
Formatting volume
  FLX utility — Utilities 4-4
  FMT utility — Utilities 5-1
/FORMFEED keyword
  SET command — MCR Operations 3-180
    VMR — System Management 10-50
Forms
  definition — Batch and Queue Gloss-4
/FORMS job qualifier
  SET QUEUE command — Batch and Queue 2-20
/FORMS qualifier
  INITIALIZE/PROCESSOR command
    DCL — System Management 7-17
  PRINT command — Batch and Queue 2-5
  QUE /LI command — Batch and Queue 2-16
FOROTS.OLB (FORTRAN IV and
    FORTRAN IV-PLUS library) — Program Development 1-11
FORTRAN — Introduction 4-12
  See also ISA
  AST service routine — Executive 1-8
  common block
    in overlays — Task Builder 3-19
  directives not available — Executive 1-7
  manual load calling sequence — Task Builder 4-9 to 4-10
    for I- and D-space task — Task Builder 4-11
  operations forbidden at AST
      state — Executive 1-8 to 1-9
  run-time support
    virtual program section — Task Builder 5-56 to 5-57
FORTRAN command — Introduction 4-13
    Command Language 6-2, 6-13 to 6-20, 9-16
  DCL — Program Development 7-1, 7-3
FORTRAN IV — Command Language 6-13 to 6-20, 9-16
  See also FOR compiler task
  compiler task — Program Development 7-1
  formatting source statements — Program Development 7-3
  library — Program Development 1-11

FORTRAN IV (Cont.)
  source file
    blank line — Program Development 7-3
    comment line — Program Development 7-3
  specifying OTS to TKB — Program Development 7-5
FORTRAN IV-PLUS — Command Language 6-13 to 6-20, 9-16
  library — Program Development 1-11
FORTRAN OTS
  system object library — System Generation (11S) 4-12
FORTRAN programs
  increasing FSR size — I/O Operations 2-41
FORTRAN-77 — Command Language 6-13 to 6-20, 9-16
FORTRAN-IV-PLUS language processor — EDT Editor 6-4
FORTRAN-style carriage control
  See FB$FTN mask in RAT field
Forward reference — PDP-11 MACRO-11 3-8 to 3-10, 3-13
Four-byte signed integer key — RMS-11 User's Guide 6-4
Four-byte unsigned binary key — RMS-11 User's Guide 6-5
/FP switch — Task Builder 10-18
FP11 — System Generation (11M) 4-13
/FPRO keyword
  HOME command — MCR Operations 3-72
  INI command — MCR Operations 3-80
  MOUNT command — MCR Operations 3-120
FPT symbolic argument — PDP-11 MACRO-11 6-19
/FR switch
  PIP utility — Utilities 3-23
  RMSRST utility — RMS-11 Utilities 7-7
  VFY utility — Utilities 9-5
Fragment
  pool — System Management 13-2 to 13-5, 13-13
Fragmentation
  pool — System Management 13-1 to 13-5, 13-7 to 13-10, 13-12 to 13-13
FREE command
  RMD — System Management 6-8
$FREE macro — RMS-11 Macros 5-58
FREE operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
  and shared access — RMS-11 User's Guide 2-10
  block stream — RMS-11 Macros 4-13
  $FREE macro — RMS-11 Macros 5-58
  record stream — RMS-11 Macros 4-9
Free-space list for pool — RMS-11 Macros 2-19
$FSEP
  predefined syntax element in MML — System Management 12-44
FSR
  calculating length — I/O Operations 2-40
  changing the size of — I/O Operations 1-3
  definition of — I/O Operations 1-11
  initializing — I/O Operations 2-36, 2-39
  number of block buffer headers — I/O Operations 1-2
  number of block buffers — I/O Operations 1-2
FSR size
  for command file — I/O Operations 6-13
$$FSR1 — I/O Operations 1-2
  FSR program section — I/O Operations 2-40
  reserved PSECT name — Task Builder E-3
$$FSR2 — I/O Operations 1-2, 4-2, 4-4 to 4-5
.FSRPT
  low-memory context — Task Builder B-10

.FSRPT (Cont.)
  reserved global symbol — Task Builder E-1
FSRSZ$ — I/O Operations 2-37
FSRSZ$ macro — I/O Operations 2-36
  format — I/O Operations 2-37
  parameters — I/O Operations 2-37
FSZ field in FAB
  CREATE operation — RMS-11 Macros 5-11
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-78
  summary — RMS-11 Macros 6-51
FTB — Program Development 4-4
FTB library
  overlaid region — Task Builder 5-13
.FTN file type — Program Development 7-3 to 7-4
  See also FOR compiler task
/FU switch — Task Builder 10-19
  LBR utility — Utilities 10-21
  PIP utility — Utilities 3-25
  QUE /LI command — Batch and Queue 2-15
  RMSDSP utility — RMS-11 Utilities 5-2, 5-4
Full format report — Error Logging 3-15
  context information — Error Logging 1-5
  device error — Error Logging 1-5
  device supplied information — Error Logging 1-5
  * flag — Error Logging 1-5
  I/O operation — Error Logging 1-5
/FULL qualifier
  SHOW QUEUE command — Batch and Queue 2-15
Full-duplex option — MCR Operations 3-179
  System Management 10-49
Function
  control key — EDT Editor 5-5
  how to redefine — EDT Editor 10-1
Function commands
  IOX
    as a category — System Management 4-3
Function directive, assembler — PDP-11 MACRO-11 6-18 to 6-22
Function key — EDT Editor 5-1
Function mask word
  See I/O function mask
Functionality — Introduction 2-2

G

G command — ODT 2-9, 3-2
  ODT — Program Development 5-6, 5-8
G register — ODT 2-7, 5-4
/GBL keyword
  ASSIGN command — MCR Operations 3-17
    VMR — System Management 10-9
GBL symbolic argument — PDP-11 MACRO-11 6-21, 6-41
GBLDEF option — Task Builder 11-17
GBLINC option — Task Builder 11-18
GBLPAT option — Task Builder 11-19
  See also TKB
GBLREF option — Task Builder 11-20
GBLXCL option — Task Builder 11-21
GCCI$ — Executive 5-75
GCII$ — Executive 5-79
GCML — I/O Operations 6-1 to 6-13
  run-time calls — I/O Operations 6-9
  usage considerations — I/O Operations 6-13
GCML control block — I/O Operations 6-3
  offsets — I/O Operations 6-6 to 6-9

GCML control block (Cont.)
    referencing — I/O Operations 6-9
GCML$ — I/O Operations 6-9 to 6-11
GCMLB$ — I/O Operations 6-4 to 6-5
GCMLD$ — I/O Operations 6-6 to 6-9
General Information Directive — Executive 1-12
General register — ODT 5-2
Generic match — RMS-11 Introduction 3-12
GET argument to ORG$ macro — RMS-11 Macros 2-3
GET command
  RMSDES utility — RMS-11 Utilities 2-10, 2-17, 2-24
    PROTECTION attribute — RMS-11 Utilities 2-33
    with SAVE — RMS-11 Utilities 2-28
Get Command for Command
    Interpreter directive — Executive 5-75
Get Command Interpreter
    Information directive — Executive 5-79
Get LUN Information directive — Executive 5-81
$GET macro
  key access — RMS-11 Macros 5-63
  RFA access — RMS-11 Macros 5-67
  sequential access — RMS-11 Macros 5-60
Get Mapping Context directive — System Generation (11M) 4-25
    Executive 5-86
Get MCR Command Line directive — Executive 5-84
Get Multiple Characteristics — I/O Drivers 2-13
GET operation — RMS-11 Introduction 4-4
    RMS-11 User's Guide 1-15
    RMS-11 Macros 4-10
  access modes — RMS-11 Introduction 4-6
  and bucket locking — RMS-11 User's Guide 2-8
  and ODLs — RMS-11 User's Guide 8-5
  and shared access — RMS-11 User's Guide 2-6, 2-10
  and stream records — RMS-11 User's Guide 2-16 to 2-17
  declaring with ORG$ macro — RMS-11 Macros 2-3
  deferred write — RMS-11 User's Guide 7-9
  $GET macro
    key access — RMS-11 Macros 5-63
    RFA access — RMS-11 Macros 5-67
    sequential access — RMS-11 Macros 5-60
  indexed files — RMS-11 User's Guide 7-5, 7-9
    key access — RMS-11 User's Guide 7-5
    random by key — RMS-11 User's Guide 5-13
    RFA access — RMS-11 User's Guide 7-5
    sequential access — RMS-11 User's Guide 5-17, 7-5
  key access — RMS-11 User's Guide 1-16
  locate mode — RMS-11 User's Guide 3-14
    indexed files — RMS-11 User's Guide 7-8
    relative files — RMS-11 User's Guide 4-13
  move mode
    indexed files — RMS-11 User's Guide 7-7
    relative files — RMS-11 User's Guide 4-12
    sequential files — RMS-11 User's Guide 3-13
  relative files — RMS-11 User's Guide 4-10
    key access — RMS-11 User's Guide 4-10
    RFA access — RMS-11 User's Guide 4-10
    sequential access — RMS-11 User's Guide 4-10
  RFA access — RMS-11 User's Guide 1-16
  sequential access — RMS-11 User's Guide 1-16
  sequential files — RMS-11 User's Guide 3-9
    key access — RMS-11 User's Guide 3-9
    RFA access — RMS-11 User's Guide 3-9
    sequential access — RMS-11 User's Guide 3-9
Get Partition Parameters
    directive — Executive 5-89
Get Region Parameters directive — Executive 5-91
Get Sense Switches directive — Executive 5-93

Get Task Parameters directive — Executive 5-97
Get Time Parameters directive — Executive 5-95
GET$
  FDB — I/O Operations 3-20
  locate mode — I/O Operations 3-18
  move mode — I/O Operations 3-18, 3-21
GET$ macro call
  format — I/O Operations 3-19
  parameters — I/O Operations 3-19
GET$R — I/O Operations 3-22
GET$R macro call
  format — I/O Operations 3-22
  parameters — I/O Operations 3-23
GET$S — I/O Operations 3-24
Get-space routine — RMS-11 Macros 2-18
  example — RMS-11 Macros 7-18
  macro
    declaring — RMS-11 Macros C-2
  RMS-11-supplied — RMS-11 Macros 2-4
GETADR — Executive 1-7
$GETGSA macro — RMS-11 Macros 2-19
GFB — Executive 5-40, 5-60
Global — Introduction Gloss-15
  additive relocation — Task Builder A-16
  relocation — Task Builder A-15
    additive displaced — Task Builder A-17
    displaced — Task Builder A-16
  symbol
    address of ODT SST routine — Task Builder 11-24
    ambiguously defined in overlay — Task Builder 3-16
    declaration directory record — Task Builder A-2
    directory record format — Task Builder A-4
    end of directory record — Task Builder A-11
    from the default library — Task Builder 3-18
    in autoloadable segment — Task Builder 4-4, 4-6
    in cross-reference listing — Task Builder 10-12 to 10-13
    multiplydefined — Task Builder 3-16
    multisegment task — Task Builder 3-16
    name — Task Builder A-6
    name entry — Task Builder A-6
    overlay search sequence — Task Builder 3-17
    resolution — Task Builder 2-7
    search sequence in overlays — Task Builder 3-16
    undefined — Task Builder 2-7
  symbol resolution
    co-tree — Task Builder 3-17
    default library — Task Builder 3-18
    in multisegment task — Task Builder 3-16
GLOBAL argument — PDP-11 MACRO-11 8-9
Global cross-reference
  listing — Program Development 4-5 to 4-6
Global default
  disabling in MACRO-11 — Program Development 3-1 to 3-2
Global event flags
  group — Command Language 6-91 to 6-92, 9-32, 9-38
Global expression evaluation — PDP-11 MACRO-11 3-17
Global label — PDP-11 MACRO-11 6-49
  $USRTB — Writing I/O Driver 3-13
  $xxDAT — Writing I/O Driver 3-9
  $xxEND — Writing I/O Driver 3-9
  $xxTBL — Writing I/O Driver 4-10
Global reference — PDP-11 MACRO-11 6-49
Global switch
  RMSBCK utility — RMS-11 Utilities 6-5
  RMSIFL utility — RMS-11 Utilities 3-5

Global switch (Cont.)
  RMSRST utility — RMS-11 Utilities 7-5
Global symbol — Introduction 4-8, Gloss-15; PDP-11 MACRO-11 1-2, 3-7; Program Development 1-4 to 1-5
  defining — MCR Operations 4-3
  definition — PDP-11 MACRO-11 3-1 to 3-2, 3-8, 6-49
    See also .GLOBL directive
  deleting definition of — MCR Operations 4-35
  directory — PDP-11 MACRO-11 1-2
  entry point — Program Development 1-4, 6-5 to 6-6, 6-10
  label as a — PDP-11 MACRO-11 2-2
  mode — MCR Operations 4-32
  resolution — Program Development 4-2, 6-8 to 6-9
  undefined reference — PDP-11 MACRO-11 6-21
  using library to resolve undefined — Program Development 6-8 to 6-9
.GLOBL directive — PDP-11 MACRO-11 3-7, 6-49
GLUN$ — Executive 5-81; I/O Drivers 1-21
  A/D converter — I/O Drivers 14-2
  card reader — I/O Drivers 11-1 to 11-2
  cassette — I/O Drivers 9-1 to 9-2
  DECtape — I/O Drivers 6-1 to 6-2
  disk — I/O Drivers 5-4A
  DT07 UNIBUS switch — I/O Drivers 23-2
  full-duplex terminal driver — I/O Drivers 2-6 to 2-7
  graphic display driver — I/O Drivers 20-1
  half-duplex terminal driver — I/O Drivers 3-4 to 3-5
  ICS/ICR — I/O Drivers 18-8
  laboratory peripheral system — I/O Drivers 16-2
  line printer — I/O Drivers 10-2 to 10-3
  LPA11-K — I/O Drivers 21-2
  magnetic tape — I/O Drivers 8-3
  message-oriented communication device — I/O Drivers 12-4
  paper tape — I/O Drivers 17-1
  PCL — I/O Drivers 13-2
  table of bits returned — I/O Drivers 1-22 to 1-23
  TU58 — I/O Drivers 7-1 to 7-2
  UDC11 — I/O Drivers 15-3
GMCR$ — Executive 5-84
GMCX$ — Executive 5-86
$GNCAL macro — RMS-11 Macros C-2
Go command — ODT 2-9, 3-2
GOLD
  alternate function — EDT Editor 5-5
  description — EDT Editor 2-5, 5-7
  example — EDT Editor 5-7
  instead of control key — EDT Editor 5-53
  repeat function — EDT Editor 5-7
GOLD integer function — EDT Editor 5-7
GOLD/A function — EDT Editor 9-8
GOLD/D function — EDT Editor 9-8
GOLD/E function — EDT Editor 9-8
GOLD/T function — EDT Editor 9-8
.GOSUB directive — MCR Operations 4-37
  example — MCR Operations 4-37
  format — MCR Operations 4-37
.GOTO directive — MCR Operations 4-37
  example — MCR Operations 4-38
  format — MCR Operations 4-38
GPRT$ — Executive 5-89

Graphic display driver
  device-specific QIO — I/O Drivers 20-2
  standard QIO — I/O Drivers 20-2
  status return — I/O Drivers 20-3
GREG$ — Executive 5-91
/GRO keyword
  HELP command — MCR Operations 3-65
Group
  global event flag — MCR Operations 3-55
    creating — MCR Operations 3-55
    displaying — MCR Operations 3-55
    eliminating — MCR Operations 3-55
  group — MCR Operations 2-3
  user — MCR Operations 2-3
Group Global Event Flag Control Block
  See GFB
Group global event flag dump — Crash Dump Analyzer 1-6, 3-2, 3-18
Group global event flags — Command Language 6-91 to 6-92, 9-32, 9-38
GROUP GLOBAL EVENT FLAGS command — MCR Operations 3-55
Group Number Identification
  definition — System Management B-1
Group-global event flag — Executive 5-60
  reading — Executive 5-127
GSA$ macro — RMS-11 Macros 2-18
  example — RMS-11 Macros 7-3, 7-7, 7-11, 7-15
GSSW$S — Executive 5-93
GT condition test argument — PDP-11 MACRO-11 6-51
$GTBYT routine — Writing I/O Driver 5-12
$GTCOR (Get core) — System Library 8-11
.GTDID — I/O Operations 3-15, 4-17
.GTDIR — I/O Operations 3-15, 4-16
GTIM$ — Executive 5-95
$GTPKT routine — Writing I/O Driver 2-12, 5-13
  in driver processing — Writing I/O Driver 2-17
  use of
    with ACP — Writing I/O Driver D-6
GTSK$ — Executive 5-97
$GTWRD routine — Writing I/O Driver 5-14
  conditional assembly — Writing I/O Driver 5-1
  inclusion of
    by SYSGEN — Writing I/O Driver 3-2
Guide to Writing an I/O Driver Manual
  note to — Release Notes 1-55

H

H register — ODT 2-6, 5-3
Handler
  device
    See Device driver
Hang — Introduction Gloss-16
Hard error
  definition — Error Logging 1-3
Hard error limit switch — Error Logging 2-3, 2-7
Hard location
  See XB$HRD mask in AOP field
Hard receive error
  detection — I/O Drivers 2-36
Hardcopy terminal
  SET TERMINAL — EDT Editor 9-12
  SHOW TERMINAL — EDT Editor 9-17

Hardware — Introduction Gloss-16
  boot block
    writing on system device — MCR Operations 3-159
  configuration — System Generation (11S) 1-2
  form feed option — MCR Operations 3-180
    System Management 10-50
  horizontal tab option — MCR Operations 3-181
    System Management 10-50
  program development — Program Development 1-12
/HD switch — Task Builder 10-20
  DMP utility — Utilities 11-5
  VFY utility — Utilities 9-5
/HDR — Crash Dump Analyzer 2-2
/HDR3 keyword
  MOUNT command — MCR Operations 3-120
HDRDF$ — Crash Dump Analyzer B-20
Header — Task Builder 2-8
  excluding task — Task Builder 10-20
  file — Introduction 3-6, 4-8, Gloss-13
    index
      allocating — MCR Operations 3-80
  in task image — Task Builder B-10
  task
    display in RMD — System Management 6-10
      altering from MCR — System Management 6-11
    fixed part — Task Builder B-11
    variable part — Task Builder B-12
    vector extension area — Task Builder B-13
Header, page — PDP-11 MACRO-11 6-4
/HEADERS qualifier
  BRU utility — Utilities 7-16
$HEADR pointer
  use of
    in fault tracing — Writing I/O Driver 3-24
HELLO command — Introduction 1-5, Gloss-20
    MCR Operations 3-57
  command line format — MCR Operations 3-59
  error message — MCR Operations 3-62
  example — MCR Operations 3-61
  time limit — MCR Operations 3-59
HELP
  as line editing command — EDT Editor 1-3, 7-9
  function key — EDT Editor 2-5, 5-7
  keypad editing — EDT Editor 1-4, 2-5, 5-7
  RMSBCK utility — RMS-11 Utilities 6-4
  RMSCNV utility — RMS-11 Utilities 4-5
  RMSDEF utility — RMS-11 Utilities A-5
  RMSDES utility — RMS-11 Utilities 2-2, 2-11
  RMSDSP utility — RMS-11 Utilities 5-3
  RMSIFL utility — RMS-11 Utilities 3-3
  RMSRST utility — RMS-11 Utilities 7-3
  sample description — EDT Editor 1-3
  use of facility — EDT Editor 1-3 to 1-4
  use of subtopic — EDT Editor 1-4, 7-9
  used for keypad key description — EDT Editor 2-5
Help
  extracting a help file — System Generation (11M) 6-7, 6-17
  library — System Generation (11M) 6-7, 6-17
HELP command — Introduction 1-12, Gloss-16
    Command Language 1-5 to 1-6, 3-22 to 3-28, 9-17
    MCR Operations 3-65
  command line format — MCR Operations 3-65
  EDT — Introduction 2-6
  error message — MCR Operations 3-69
  example of help file — MCR Operations 3-68
  format — Command Language 3-28

HELP command (Cont.)
  IOX — System Management 4-39
  keyword
    /CLI — MCR Operations 3-65
    /DCL — MCR Operations 3-65
    /FIL — MCR Operations 3-65
    /GRO — MCR Operations 3-65
    /LOC — MCR Operations 3-65
    /MCR — MCR Operations 3-66
    /OUT — MCR Operations 3-66
    /xxx — MCR Operations 3-66
  writing — Command Language 3-28
Help file
  calling other files — MCR Operations 3-67
  contents
    displaying — MCR Operations 3-65
  default — MCR Operations 3-65
  example — MCR Operations 3-68
  format — Command Language 3-26 to 3-27
    MCR Operations 3-66
    level number — MCR Operations 3-66
  qualifier
    synonymous — MCR Operations 3-67
  writing — Command Language 3-26 to 3-27
HELP.ULB — System Generation (11M) 6-7, 6-17
HELPBUILD.CMD — System Generation (11M) 6-8, 6-18
/HF switch
  DMP utility — Utilities 11-6
/HFILL keyword
  SET command — MCR Operations 3-181
    VMR — System Management 10-50
/HHT keyword
  SET command — MCR Operations 3-181
    VMR — System Management 10-50
/HIGH keyword
  /LOAD command — MCR Operations 3-106
High-key value
  buckets — RMS-11 User's Guide 5-5 to 5-6
High-level language — Introduction 4-13, Gloss-16
    RMS-11 Introduction 4-7, 5-1
  access streams — RMS-11 User's Guide 1-15
  and file design — RMS-11 User's Guide 1-19
  and ODL files — RMS-11 User's Guide 8-5
  and remote access — RMS-11 User's Guide B-1
  and shared access — RMS-11 User's Guide 2-7
  asynchronous operations — RMS-11 User's Guide 3-14, 4-14
  bucket fill size — RMS-11 User's Guide 6-29
  bucket size — RMS-11 User's Guide 4-3, 6-21
  defaults — RMS-11 User's Guide 2-2
  DEQ — RMS-11 User's Guide 3-5, 4-4, 6-26
  file and directory operations — RMS-11 User's Guide 3-15, 4-15, 7-10
  file operations — RMS-11 User's Guide 8-10
  initial allocation — RMS-11 User's Guide 3-4, 4-4, 6-26
  key characteristics — RMS-11 User's Guide 6-8
  keys — RMS-11 User's Guide 6-7
  locate mode — RMS-11 User's Guide 3-14, 4-13
  MRN — RMS-11 User's Guide 4-5
  overlay program in — Task Builder 3-39 to 3-40
  placement control — RMS-11 User's Guide 6-14
  populating files — RMS-11 User's Guide 6-26
  restrictions — RMS-11 User's Guide 1-13, 1-15, 2-1
/HL switch — Error Logging 2-3, 2-7

HLP macro
  MML — System Management 12-31
/HO switch
  PRI command — Batch and Queue 2-4
HOLD command
  format
    entry number — Batch and Queue 2-22
    job name — Batch and Queue 2-22
/HOLD keyword
  BYE command — MCR Operations 3-31
  SET command — MCR Operations 3-182
/HOLD qualifier
  PRINT command — Batch and Queue 2-4
Hold-screen mode option — MCR Operations 3-182
HOLD/ENTRY command — Command Language 9-17
HOLD/JOB command — Command Language 9-18
HOLD_SCREEN
  VT52 — Introduction 1-16
Home block — I/O Operations E-2
  format — I/O Operations E-3
  volume — Command Language 5-11, 5-47 to 5-59, 9-18, 9-20
HOME command — MCR Operations 3-71
  command line format — MCR Operations 3-71
  error message — MCR Operations 3-75
  example — MCR Operations 3-74
  keyword
    /DENS — MCR Operations 3-71
    displaying — MCR Operations 3-74
    /EXT — MCR Operations 3-72
    /FPRO — MCR Operations 3-72
    /LRU — MCR Operations 3-72
    /MXF — MCR Operations 3-73
    /NAME — MCR Operations 3-73
    /OVR — MCR Operations 3-73
    /OWNER — MCR Operations 3-73
    /PRO — MCR Operations 3-73
    /UIC — MCR Operations 3-74
    /VI — MCR Operations 3-74
    /WIN — MCR Operations 3-74
HOME utility — Command Language 5-57 to 5-59, 9-20
Host system — System Generation (11S) 1-2; Task Builder C-1
  building a task for another system — Task Builder C-1
  definition — System Generation (11M) 1-6
  transferring from task — Task Builder C-1
HWDDF$ — Crash Dump Analyzer B-22
/HX switch
  DMP utility — Utilities 11-6
Hyphen (-) — Command Language 3-16
  See also ODL operator

I

I command — EDT Editor 8-12; ODT 2-9
I error — PDP-11 MACRO-11 6-26, 6-28 to 6-29
  summary — PDP-11 MACRO-11 D-3
I register — ODT 2-7, 5-4
I symbolic argument — PDP-11 MACRO-11 6-41
I/O — RMS-11 Introduction 2-1
  and performance — RMS-11 User's Guide 2-3
  and record operations — RMS-11 User's Guide 5-17
  canceling request — I/O Drivers 1-27

I/O (Cont.)
  completion — I/O Drivers 1-32
  data structures
    changes to — Release Notes 1-33
  function code
    summary — I/O Drivers B-1
  issuing request — I/O Drivers 1-16
  logical — I/O Drivers 1-2
  packet
    maximum number
      specifying — MCR Operations 3-188
  page
    overmapping — MCR Operations 3-95, 3-153
  paging operations — RMS-11 User's Guide 8-10
  physical — I/O Drivers 1-2
  request
    redirecting — MCR Operations 3-144
  status block — I/O Drivers 1-11, 1-35
  status code — I/O Drivers 1-33
    summary — I/O Drivers B-1
  status condition
    table — I/O Drivers 1-36 to 1-38
  virtual — I/O Drivers 1-2
  window turning — RMS-11 User's Guide 8-11
I/O buffer — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-14
  application design — RMS-11 User's Guide 2-5
  remote access — RMS-11 User's Guide B-3
    indexed files — RMS-11 User's Guide B-3
    relative files — RMS-11 User's Guide B-3
    sequential files — RMS-11 User's Guide B-3
I/O buffer pool — RMS-11 Macros 2-6
I/O control blocks
  interrelationship — Writing I/O Driver 2-6
I/O counts
  display in RMD — System Management 6-12
I/O data structure
  See also System data structure macro definition
  See also Data structure
I/O device
  See Device
I/O driver
  See also Driver
  size — System Generation (11S) 1-3
I/O Drivers Reference Manual
  note to — Release Notes 1-50
  technical changes — Release Notes 1-16
I/O error code — I/O Operations I-1 to I-12
I/O error report
  IOX — System Management 4-21
I/O exercise
  steps — System Management 4-2
  termination — System Management 4-23
I/O function code — I/O Operations I-2, I-5, I-9, I-12; I/O Operations I-1, I-3 to I-4, I-6 to I-8, I-10 to I-11
I/O function mask
  ACP — Writing I/O Driver 4-12
  control — Writing I/O Driver 4-12
  creating — Writing I/O Driver 4-13
  legal — Writing I/O Driver 4-12
  no-op — Writing I/O Driver 4-12
  values for disk drive — Writing I/O Driver 4-16
  values for magtape drive — Writing I/O Driver 4-17
  values for standard functions — Writing I/O Driver 4-15

I/O function mask (Cont.)
  values for unit record device — Writing I/O Driver 4-18
I/O hierarchy — Writing I/O Driver 2-1
I/O initiator entry point — Writing I/O Driver 2-4, 2-12
  DDT conditions — Writing I/O Driver 4-10
I/O operations
  event flag use — I/O Operations 2-42
I/O Operations Reference Manual
  note to — Release Notes 1-50
    I/O error codes — Release Notes 1-54
    MTTACP — Release Notes 1-50
    RMS-11 support — Release Notes 1-52
I/O packet — Writing I/O Driver 2-8
  description — Writing I/O Driver 4-2
  format — Writing I/O Driver 4-3
  pointer in SCB — Writing I/O Driver 4-21
  with ACP — Writing I/O Driver D-7
I/O packet field
  I.AST — Writing I/O Driver 4-5
  I.EFN — Writing I/O Driver 4-3
  I.FCN — Writing I/O Driver 4-4
  I.IOSB — Writing I/O Driver 4-4
  I.LNK — Writing I/O Driver 4-2
  I.PRI — Writing I/O Driver 4-3
  I.PRM — Writing I/O Driver 4-5
  I.TCB — Writing I/O Driver 4-4
  I.UCB — Writing I/O Driver 4-4
I/O packets
  pre-allocated — System Generation (11M) 4-37
I/O page
  direct access — System Generation (11S) 4-13
  overmapping — System Management 10-22
  specifying — Task Builder 10-22
I/O philosophy — Writing I/O Driver 2-1
I/O processing — System Generation (11S) 2-23
  ACP — Writing I/O Driver 2-3
  QIO directive — Writing I/O Driver 2-3
I/O queue — Writing I/O Driver 2-9
I/O related directive
  summary — I/O Operations C-2 to C-3
I/O request
  flow — Writing I/O Driver 2-16 to 2-17
  redirecting — System Management 10-33
I/O rundown — System Generation (11M) 4-26
I/O status block — I/O Operations 2-43
  K-series — I/O Drivers 22-32
  LPA11-K — I/O Drivers 21-30 to 21-32
  parameter to FDBK$A — I/O Operations 2-12
  READ$ operations — I/O Operations 2-43
  second word — I/O Operations 2-43
  status codes — I/O Operations 2-44
I/O technique — RMS-11 User's Guide 2-17
  asynchronous operations — RMS-11 User's Guide 2-17
  deferred write — RMS-11 User's Guide 2-17
  indexed files — RMS-11 User's Guide 7-8
    asynchronous operations — RMS-11 User's Guide 7-8
    deferred write — RMS-11 User's Guide 7-8
    multiple access streams — RMS-11 User's Guide 7-10
    multiple buffers — RMS-11 User's Guide 7-9
    sequential reads — RMS-11 User's Guide 7-10
  mass insertion — RMS-11 User's Guide 2-18
  MBC — RMS-11 User's Guide 2-17
  multiple access streams — RMS-11 User's Guide 2-17
  multiple buffers — RMS-11 User's Guide 2-18
  relative files — RMS-11 User's Guide 4-14
    asynchronous operations — RMS-11 User's Guide 4-14
    deferred write — RMS-11 User's Guide 4-14

I/O technique
  relative files (Cont.)
    multiple access streams — RMS-11 User's Guide 4-15
    multiple buffers — RMS-11 User's Guide 4-15
  sequential files — RMS-11 User's Guide 3-14
    asynchronous operations — RMS-11 User's Guide 3-14
    deferred write — RMS-11 User's Guide 3-14
    MBC — RMS-11 User's Guide 3-15
    multiple access streams — RMS-11 User's Guide 3-15
    multiple buffers — RMS-11 User's Guide 3-14
I/O unit — RMS-11 User's Guide 1-14
  blocks — RMS-11 User's Guide 1-16
  buckets — RMS-11 User's Guide 1-16
I/O-related directive
  summary — I/O Operations C-1
IAN field in KEY block
  CREATE operation — RMS-11 Macros 5-19
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-67
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-79
IAS
  linking
    debugger — ODT 8-2
    ODT — ODT 1-3
IAS system prompts and CLI — EDT Editor 2-3
<IAS> symbol — MCR Operations 4-9
IBM magtape
  reading — I/O Operations G-18 to G-19
IBS field in KEY block
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-68
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-80
ICB — Writing I/O Driver 3-2, 4-35
.ICF module — Error Logging 4-1
ICS/ICR — I/O Drivers 18-1
  address assignment — I/O Drivers 18-2
  configuration — I/O Drivers 18-7
  device-specific QIO — I/O Drivers 18-8 to 18-12
  direct access — I/O Drivers 18-75 to 18-80
  error recovery — I/O Drivers 18-71
  FORTRAN interface — I/O Drivers 18-35 to 18-70
  list of supported module — I/O Drivers 18-3
  standard QIO — I/O Drivers 18-8 to 18-12
/ID switch
  DMP utility — Utilities 11-6
  FLX utility — Utilities 4-7
  PIP utility — Utilities 3-23
  RMSBCK utility — RMS-11 Utilities 6-4 to 6-5
  RMSCNV utility — RMS-11 Utilities 4-5, 4-9
  RMSDEF utility — RMS-11 Utilities A-5
  RMSDSP utility — RMS-11 Utilities 5-3, 5-5
  RMSIFL utility — RMS-11 Utilities 3-3, 3-5
  RMSRST utility — RMS-11 Utilities 7-3, 7-5
IDB pool — RMS-11 Macros 2-5
.IDENT directive — PDP-11 MACRO-11 6-16 to 6-17
  Program Development 2-5
IDN condition test argument — PDP-11 MACRO-11 6-52
IDX argument to ORG$ macro — RMS-11 Macros 2-3
.IF directive — PDP-11 MACRO-11 6-51 to 6-55
  MCR Operations 4-38
  condition test argument — PDP-11 MACRO-11 6-51 to 6-52
  example — MCR Operations 4-39
  format — MCR Operations 4-38
IF-THEN-ELSE statement — Error Logging 5-34
IFAB pool — RMS-11 Macros 2-5

.IFACT directive MCR Operations 4-39
example MCR Operations 4-39
format MCR Operations 4-39
.IFDF directive MCR Operations 4-39
example MCR Operations 4-40
format MCR Operations 4-40
.IFDISABLED directive MCR Operations 4-40
format MCR Operations 4-40
.IFENABLED directive MCR Operations 4-40
format MCR Operations 4-40
.IFF directive PDP-11 MACRO-11 6-53 to 6-55
MCR Operations 4-41
example MCR Operations 4-41
format MCR Operations 4-41
IFI field in FAB
CLOSE operation RMS-11 Macros 5-3 to 5-4
CONNECT operation RMS-11 Macros 5-6
CREATE operation RMS-11 Macros 5-20
DISPLAY operation RMS-11 Macros 5-30
EXTEND operation RMS-11 Macros 5-46
offset RMS-11 Macros 6-22
OPEN operation RMS-11 Macros 5-77
summary RMS-11 Macros 6-52
$IFIL
predefined syntax element in MML System Management 12-41
$IFILE
predefined syntax element in MML System Management 12-41
.IFINS directive MCR Operations 4-40
example MCR Operations 4-40
format MCR Operations 4-40
IFL field in KEY block
CREATE operation RMS-11 Macros 5-20
DISPLAY operation RMS-11 Macros 5-31
offset RMS-11 Macros 6-67
OPEN operation RMS-11 Macros 5-80
summary RMS-11 Macros 6-81
IFLA.TMP (RMSIFL) RMS-11 Utilities 3-11
allocating space RMS-11 Utilities 3-13
IFLA1.TMP (RMSIFL) RMS-11 Utilities 3-12
allocating space RMS-11 Utilities 3-14
.IFLOA directive MCR Operations 4-41
example MCR Operations 4-41
format MCR Operations 4-41
IFLP.TMP (RMSIFL) RMS-11 Utilities 3-10
allocating space RMS-11 Utilities 3-13
.IFNACT directive MCR Operations 4-39
example MCR Operations 4-39
format MCR Operations 4-39
.IFNDF directive MCR Operations 4-39
example MCR Operations 4-40
format MCR Operations 4-40
.IFNINS directive MCR Operations 4-40
example MCR Operations 4-40
format MCR Operations 4-40
.IFNLOA directive MCR Operations 4-41
example MCR Operations 4-41
format MCR Operations 4-41
IFORM System Management 12-20 to 12-25
.IFT directive PDP-11 MACRO-11 6-53 to 6-55
MCR Operations 4-41
example MCR Operations 4-41
format MCR Operations 4-41
.IFTF directive PDP-11 MACRO-11 6-53 to 6-54
IHAR$S Executive 5-53
.IIF directive PDP-11 MACRO-11 6-56

Illegal character — PDP-11 MACRO-11 3-3
/IM switch
  FLX utility — Utilities 4-5
  RMSCNV utility — RMS-11 Utilities 4-9
  VMR — System Management 10-4, 10-41
Image
  disk — Task Builder 2-8 to 2-9
  memory — Task Builder 2-8 to 2-9
/IMAGE qualifier
  BRU utiltiy — Utilities 7-17
Immediate address mode — PDP-11 MACRO-11 5-6 to 5-7
Immediate conditional assembly — PDP-11 MACRO-11 6-56
Immediate expression indicator — PDP-11 MACRO-11 3-2
Implicit .WORD directive — PDP-11 MACRO-11 2-1, 2-4, 6-25
Implicit prompt — Introduction 1-6, 2-15, Gloss-16 to Gloss-17, Gloss-25
Implied TYPE (Null)
  line editing — EDT Editor 7-12
  nokeypad editing — EDT Editor 8-13
/IN switch
  LBR utility — Utilities 10-19
.INC directive — MCR Operations 4-42
  example — MCR Operations 4-42
  format — MCR Operations 4-42
/INC keyword
  INSTALL command — MCR Operations 3-95
    VMR — System Management 10-22
  RUN command — MCR Operations 3-152
/INC switch
  OTL — System Generation (11S) 2-8
INCLUDE command — EDT Editor 2-34, 7-10
.INCLUDE directive — PDP-11 MACRO-11 6-58
Increasing FSR size
  FORTRAN programs — I/O Operations 2-41
  MACRO-11 programs — I/O Operations 2-40
INCREMENT statement — Error Logging 5-31
Incremental reorganization — RMS-11 User's Guide 5-12
Indefinite repeat block — PDP-11 MACRO-11 7-3, 7-16 to 7-19
Index — RMS-11 Introduction 3-7
  See also KEY block
  alternate
    bucket size calculation — RMS-11 User's Guide 6-19
    level 0 — RMS-11 User's Guide 5-5
    SIDRs — RMS-11 User's Guide 5-5
  area bucket size
    See IBS field in KEY block
  area number (higher levels)
    See IAN field in KEY block
  area number (lowest level)
    See LAN field in KEY block
  count
    See NOK field in SUM block
  data bucket size
    See DBS field in KEY block
  data bucket VBN
    See DVB field in KEY block
  depth — RMS-11 User's Guide 5-5
  description, obtaining
    See DISPLAY operation
  level count
    See LVL field in KEY block
  levels — RMS-11 User's Guide 5-4, 5-6
    data — RMS-11 User's Guide 5-5
  primary
    bucket size calculation — RMS-11 User's Guide 6-16
    level 0 — RMS-11 User's Guide 5-5
  reference number

Index
  reference number (Cont.)
    See REF field in KEY block
  root — RMS-11 User's Guide 5-5
  root bucket VBN
    See RVB field in KEY block
Index address mode — PDP-11 MACRO-11 5-5
Index bucket — RMS-11 User's Guide 5-6
Index deferred address mode — PDP-11 MACRO-11 5-6
Index file — I/O Operations 5-2, E-1
  accessing — MCR Operations 3-125
  bit map — I/O Operations E-2
  format — I/O Operations E-1
  header — I/O Operations E-2
    allocating — MCR Operations 3-80
  LBN
    specifying — MCR Operations 3-80
  listing contents
    VFY utility — Utilities 9-6
  multiheader — MCR Operations 3-81
Index record — RMS-11 Introduction 3-7; RMS-11 User's Guide 5-2, 5-6

INDEX_AREA
  RMSDES utility — RMS-11 Utilities 2-41
INDEX_FILL
  RMSDES utility — RMS-11 Utilities 2-41
Indexed file organization — RMS-11 Introduction 3-6; RMS-11 User's Guide 1-5

  See also Index
  See also FB$IDX code
  access declarations — RMS-11 User's Guide 7-1
  allocation — RMS-11 User's Guide 6-22
    DEQ — RMS-11 User's Guide 6-26
    initial, calculation — RMS-11 User's Guide 6-22
  alternate keys — RMS-11 Introduction 3-7; RMS-11 User's Guide 1-11
  and remote access — RMS-11 User's Guide B-3
  areas — RMS-11 User's Guide 5-2, 6-10
    multiarea files — RMS-11 User's Guide 6-12
    single-area files — RMS-11 User's Guide 6-11
  asynchronous operations — RMS-11 User's Guide 7-8
  bucket fill size — RMS-11 User's Guide 6-28
  bucket format — RMS-11 User's Guide 5-2
  bucket size — RMS-11 User's Guide 6-15
    calculation, alternate indexes — RMS-11 User's Guide 6-19
    calculation, primary index — RMS-11 User's Guide 6-16
    prologue — RMS-11 User's Guide 5-2
  bucket splitting — RMS-11 User's Guide 5-11
  changeable keys — RMS-11 Introduction 3-10
  compressing deleted records — RMS-11 User's Guide 5-10, 5-16, 6-7, 6-9
  CONNECT operation — RMS-11 User's Guide 7-2
  contiguity — RMS-11 User's Guide 6-13
  data level — RMS-11 User's Guide 5-5
  data records — RMS-11 Introduction 3-7; RMS-11 User's Guide 5-2
  declaring with ORG$ macro — RMS-11 Macros 2-3
  deferred write — RMS-11 User's Guide 6-27, 7-8
  DELETE operation — RMS-11 User's Guide 5-15, 6-7, 7-3, 7-9
    duplicate keys — RMS-11 User's Guide 6-9
  depth — RMS-11 User's Guide 5-5
  design — RMS-11 User's Guide 5-1, 6-1
    allocation — RMS-11 User's Guide 6-22
    areas — RMS-11 User's Guide 6-10
    bucket size — RMS-11 User's Guide 6-15

Indexed file organization
  design (Cont.)
    keys — RMS-11 User's Guide 6-2
    placement control — RMS-11 User's Guide 6-13
    populating files — RMS-11 User's Guide 6-26
    record format — RMS-11 User's Guide 6-1
    record size — RMS-11 User's Guide 6-1
  directory operations — RMS-11 User's Guide 7-10
  DISCONNECT operation — RMS-11 User's Guide 7-3
  duplicate keys — RMS-11 Introduction 3-10
  file operations — RMS-11 User's Guide 7-10
  FIND operation — RMS-11 User's Guide 7-3, 7-9
    random by key — RMS-11 User's Guide 5-13
    sequential access — RMS-11 User's Guide 5-17
  FLUSH operation — RMS-11 User's Guide 7-5
  GET operation — RMS-11 User's Guide 7-5, 7-7 to 7-9
    random by key — RMS-11 User's Guide 5-13
    sequential access — RMS-11 User's Guide 5-17
  I/O techniques — RMS-11 User's Guide 7-8
  incremental reorganization — RMS-11 User's Guide 5-12
  index — RMS-11 Introduction 3-7
  index buckets — RMS-11 User's Guide 5-6
  index levels — RMS-11 User's Guide 5-4, 5-6
  index records — RMS-11 Introduction 3-7
    RMS-11 User's Guide 5-2, 5-6
  keys — RMS-11 Introduction 3-6
    RMS-11 User's Guide 1-5, 6-2
    changeable — RMS-11 User's Guide 6-9
    characteristics — RMS-11 User's Guide 6-8
    data type — RMS-11 Introduction 3-7
    RMS-11 User's Guide 6-3
    duplicates — RMS-11 User's Guide 6-8
    null — RMS-11 User's Guide 6-10
    number of — RMS-11 User's Guide 6-2
    position — RMS-11 User's Guide 6-7
    size — RMS-11 User's Guide 6-6
  level 0
    alternate indexes — RMS-11 User's Guide 5-5
    primary indexes — RMS-11 User's Guide 5-5
  locate mode — RMS-11 User's Guide 7-7
  mass insertion — RMS-11 User's Guide 6-28 to 6-29
  move mode — RMS-11 User's Guide 7-7
  multiple access streams — RMS-11 User's Guide 7-10
  multiple buffers — RMS-11 User's Guide 7-9
  null keys — RMS-11 Introduction 3-10
  placement control — RMS-11 User's Guide 6-13
  populating files — RMS-11 User's Guide 6-26
    primary key order — RMS-11 User's Guide 6-27
    random insertions — RMS-11 User's Guide 6-28
  primary key — RMS-11 Introduction 3-7
    RMS-11 User's Guide 1-11
  prologue — RMS-11 User's Guide 5-2
  PUT operation — RMS-11 User's Guide 6-7, 7-5, 7-7, 7-9
    duplicate keys — RMS-11 User's Guide 6-9
    mass insertion — RMS-11 User's Guide 7-9
    random by key — RMS-11 User's Guide 5-10
  random access — RMS-11 User's Guide 5-7, 6-12
  record operations — RMS-11 User's Guide 7-2
    random access — RMS-11 User's Guide 5-9
    sequential access — RMS-11 User's Guide 5-16
  record transfer modes — RMS-11 User's Guide 7-6
    locate mode — RMS-11 User's Guide 7-7
    move mode — RMS-11 User's Guide 7-7
  REWIND operation — RMS-11 User's Guide 7-6
  root — RMS-11 User's Guide 1-7, 5-5

Indexed file organization (Cont.)
  search times — RMS-11 User's Guide 5-8
  segmented keys — RMS-11 Introduction 3-10
  sequential reads — RMS-11 User's Guide 7-10
  shared access — RMS-11 User's Guide 7-1
    block access — RMS-11 User's Guide 7-1
    record access — RMS-11 User's Guide 7-1
  sharing declarations — RMS-11 User's Guide 7-1
  stream operations — RMS-11 User's Guide 7-2
  structure
    conceptual — RMS-11 User's Guide 5-4
    physical — RMS-11 User's Guide 5-2
  tree structure — RMS-11 Introduction 3-7
  UPDATE operation — RMS-11 User's Guide 5-14, 7-6 to 7-9
    changeable keys — RMS-11 User's Guide 6-10
    duplicate keys — RMS-11 User's Guide 6-9
INDEXF.SYS file — Command Language 5-11, 5-65 to 5-66

Indicator
  See Register indicator
Indirect
  command line
    interpreting — MCR Operations 4-2
  command procedure library — Release Notes 1-28
  command processor support for V4.1 — Release Notes 1-28
  directive
    parameter
      changing — MCR Operations 4-1
    summary of — MCR Operations 4-4
  error message — MCR Operations 4-57
  error processing — MCR Operations 4-10, 4-43
  example — MCR Operations 4-56
  exit status — MCR Operations 4-51
  function — MCR Operations 4-2
  invoking
    interactively
      example of — MCR Operations 4-56
  operating mode
    disabling — MCR Operations 4-31
    enabling — MCR Operations 4-32
    initial setting — MCR Operations 4-32
    list — MCR Operations 4-32
    testing — MCR Operations 4-40
  special symbol — MCR Operations 4-8
    format — MCR Operations 4-8
    logical — MCR Operations 4-8
    numeric — MCR Operations 4-10
    string — MCR Operations 4-12
    type — MCR Operations 4-8
  switch — MCR Operations 4-19
Indirect command file — I/O Operations 6-3; I/O Operations 6-11 to 6-12; Introduction 6-3; Task Builder 1-5, 3-29; Utilities 1-9
  acquiring information — MCR Operations 4-52, 4-54
  BAD utility — Utilities 6-2
  block-structured — MCR Operations 4-3
  CLI — MCR Operations 4-2
    default file type for — MCR Operations 4-2
    initiating — MCR Operations 4-2
    nested — MCR Operations 4-2
  comment in — MCR Operations 4-3
  default name for — MCR Operations 4-4
  definition — Batch and Queue Gloss-5

Indirect command file (Cont.)
  deleting — MCR Operations 4-19
  displaying trace of — MCR Operations 4-19
  exiting from — MCR Operations 4-51
  FMT utility — Utilities 5-9
  independent — System Generation (11M) 3-5
    BLDLAINIT.CMD — System Generation (11M) 3-5
    SGNBLDDRV.CMD — System Generation (11M) 3-5
    SGNKLAB.CMD — System Generation (11M) 3-5
  invoking — System Generation (11M) 3-5
  IOX — System Management 4-6
  major — System Generation (11M) 3-5
  maximum nesting depth — I/O Operations 6-3 to 6-4
  overview — System Generation (11M) 3-5
  parameter
    processing — MCR Operations 4-17
  passing commands in
    to CLI — MCR Operations 4-19
  processing
    interrupting — MCR Operations 4-46
    suspending — MCR Operations 4-55
    terminating — MCR Operations 4-36, 4-51
  RMSBCK utility — RMS-11 Utilities 6-2
  RMSCNV utility — RMS-11 Utilities 4-4
  RMSDEF utility — RMS-11 Utilities A-1 to A-2, A-5 to A-6, A-19
  RMSDES utility — RMS-11 Utilities 2-3
    comments — RMS-11 Utilities 2-4
  RMSDSP utility — RMS-11 Utilities 5-2
  RMSIFL utility — RMS-11 Utilities 3-2
  RMSRST utility — RMS-11 Utilities 7-2
  searching UIC for — MCR Operations 4-4
  SLP utility — Utilities 13-8
  task — MCR Operations 4-1
    default file type for — MCR Operations 4-1
    initiating — MCR Operations 4-1
    nested — MCR Operations 4-2
  task name in — MCR Operations 4-4
  using
    example of — MCR Operations 4-56
  VMR — System Management 10-3
  with ODL — Task Builder 3-29
  ZAP utility — Utilities 15-6
Indirect command file operator (@) — Command Language 3-16
Indirect command file processor — Command Language 1-17
Indirect Command Processor — Introduction 6-2 to 6-3, Gloss-17
  See also Indirect
Industrial control subsystem — I/O Drivers 18-1
/INDX keyword
  INI command — MCR Operations 3-80
/INF keyword
  INI command — MCR Operations 3-80
Infile
  RMSBCK utility — RMS-11 Utilities 6-3
  RMSCNV utility — RMS-11 Utilities 4-5
  RMSDSP utility — RMS-11 Utilities 5-3
  RMSIFL utility — RMS-11 Utilities 3-3
  RMSRST utility — RMS-11 Utilities 7-3
Information record
  text — Task Builder A-11
Inhibit AST Recognition — Executive 5-53
Inhibit MCR
  See MCR
INI command — MCR Operations 3-76
$INIDM (Initialize memory) — System Library 7-2

/INIT keyword
  CLI command — MCR Operations 3-36
Initial allocation
  indexed files — RMS-11 User's Guide 6-22
  relative files — RMS-11 User's Guide 4-3
  sequential files — RMS-11 User's Guide 3-4
Initial argument indicator — PDP-11 MACRO-11 3-2
Initial expression indicator — PDP-11 MACRO-11 3-2
Initial register indicator — PDP-11 MACRO-11 3-2
Initialization
  field — RMS-11 Macros 2-9
INITIALIZE command — Introduction 5-12; Command Language 5-4, 5-10, 5-12, 5-47 to 5-56, 9-18

/INITIALIZE qualifier
  BRU utility — Utilities 7-17
INITIALIZE/PRINTER command
  DCL — System Management 7-6
INITIALIZE/PROCESSOR command — Command Language 9-19
  DCL — System Management 7-14 to 7-19
    /FORMS qualifier — System Management 7-17
INITIALIZE/QUEUE command — Command Language 9-20
  DCL — System Management 7-4, 7-11, 7-13
INITIALIZE/UPDATE command — Command Language 5-11, 5-57 to 5-59, 9-20
INITM1 — Error Logging 4-7
INITVOLUME command — MCR Operations 3-76
  command line format — MCR Operations 3-76
  error message — MCR Operations 3-85
  example — MCR Operations 3-85
  keyword
    /ACCESS — MCR Operations 3-77
    /BAD — MCR Operations 3-77
    /DENS — MCR Operations 3-79
    displaying — MCR Operations 3-84
    /EXT — MCR Operations 3-79
    /FPRO — MCR Operations 3-80
    /INDX — MCR Operations 3-80
    /INF — MCR Operations 3-80
    /LRU — MCR Operations 3-82
    /MXF — MCR Operations 3-82
    /OWNER — MCR Operations 3-83
    /PRO — MCR Operations 3-84
    /UIC — MCR Operations 3-84
    /VI — MCR Operations 3-84
    /WIN — MCR Operations 3-84
$INIVM (Initialize virtual memory) — System Library 8-5
Input
  data format
    Task Builder — Task Builder A-1
  multi-line
    to the Task Builder — Task Builder 1-3
  solicited — MCR Operations 2-14
  terminating — MCR Operations 2-15
  unsolicited — MCR Operations 2-14
    processing
      parallel — MCR Operations 3-197
Input file — Introduction 4-5, Gloss-17
Input file switch
  RMSBCK utility — RMS-11 Utilities 6-8
  RMSIFL utility — RMS-11 Utilities 3-7
  RMSRST utility — RMS-11 Utilities 7-8
Input/output
  See I/O
Input/output device
  See Device

INS command — MCR Operations 3-93
INSERT command — EDT Editor 2-21, 2-26, 2-33, 7-11
  EDI editor — Program Development 2-18, 7-7
  EDI editor — Utilities 2-15
  EDT — Introduction 2-4, 2-9
Insert Directory Entry — I/O Operations 4-15
INSERT END command — EDT Editor 2-27, 2-31
Inserting
  characters in a line — Program Development 2-17
  code in the source file — Program Development 2-18
  lines in a file — Program Development 2-9, 2-18
  modules in a library — Program Development 6-9 to 6-10
  text
    INSERT command — EDT Editor 2-26, 2-33, 7-11
    INSERT END command — EDT Editor 2-31
    keypad editing — EDT Editor 2-8, 5-2, 5-10
    line editing — EDT Editor 2-26, 7-11
    nokeypad editing — EDT Editor 2-40, 8-12
INSTALL command — Introduction 4-10; Command Language 7-1, 7-4 to 7-8, 7-12 to 7-15, 7-26 to 7-34, 7-60, 9-20, 9-37; MCR Operations 3-93
  command line format — MCR Operations 3-93
  error message — MCR Operations 3-98
  example — MCR Operations 3-98
  keyword
    /CKP — MCR Operations 3-94
    /CLI — MCR Operations 3-95
    /INC — MCR Operations 3-95
    /IOP — MCR Operations 3-95
    /PAR — MCR Operations 3-95
    /PMD — MCR Operations 3-96
    /PRI — MCR Operations 3-96
    /SLV — MCR Operations 3-96
    /TASK — MCR Operations 3-97
  VMR — System Management 10-20
    command line format — System Management 10-20
    example — System Management 10-26
    keyword
      /CKP — System Management 10-21
      /CLI — System Management 10-22
      /FIX — System Management 10-22
      /INC — System Management 10-22
      /IOP — System Management 10-22
      /PAR — System Management 10-22
      /PMD — System Management 10-23
      /PRI — System Management 10-23
      /SLV — System Management 10-24
      /TASK — System Management 10-25
      /UIC — System Management 10-25
Installation — Introduction 1-2, Gloss-18
  computer — Introduction 5-3
  DCL — System Management 12-1
  flying — System Management 12-3
  RPT — Error Logging 3-1
  task — Introduction 4-9 to 4-10
Installed task — Command Language 7-57 to 7-58
  removing — Executive 1-12
Installing
  DCL — System Management 12-3
Instruction set
  commercial — PDP-11 MACRO-11 C-3 to C-4
  floating-point — PDP-11 MACRO-11 C-4 to C-5
  PDP-11 — PDP-11 MACRO-11 C-1 to C-2
Instruction space — ODT 3-2, 7-2
  command

Instruction space
  command (Cont.)
    access — ODT 2-9
  enable — ODT 1-3
Integer
  repeat function — EDT Editor 5-7
  used with GOLD function — EDT Editor 5-7
Integer key
  See also XB$IN2 mask in DTP field
  See also XB$IN4 mask in DTP field
  2-byte signed — RMS-11 User's Guide 6-4
  4-byte signed — RMS-11 User's Guide 6-4
Integer routine
  divide ($DIV) — System Library 3-2
  multiply ($MUL) — System Library 3-1
Inter-task communication — Executive 4-1
Interactive mode
  IOX — System Management 4-18
Interactive system — Introduction 1-1, 5-3, Gloss-18
Interactive terminal
  definition — Batch and Queue Gloss-5
Interactive utility
  RMSDEF utility — RMS-11 Utilities A-1
  RMSDES utility — RMS-11 Utilities 2-1
Interface
  terminal — I/O Drivers 3-2
INTERLEAVE command
  IOX — System Management 4-40
Intermediate form
  DCL
    IFORM
Intermodule variable — Error Logging 4-29
  block number — Error Logging 4-29
  cylinder error — Error Logging 4-29
  device function — Error Logging 4-29
  drive serial number — Error Logging 4-29
  drive type — Error Logging 4-29
  error type — Error Logging 4-29 to 4-30
  group error — Error Logging 4-29
  head error — Error Logging 4-29
  MASSBUS — Error Logging 4-33
  Non-MASSBUS — Error Logging 4-33
  physical unit number — Error Logging 4-29
  sector error — Error Logging 4-29
Intermodule variable declaration — Error Logging 4-14
Internal displaced relocation — Task Builder A-15
Internal file identifier
  See IFI field in FAB
Internal register — ODT 5-2
Internal stream identifier
  See ISI field in RAB
Internal symbol
  directory record — Task Builder A-24
  name entry — Task Builder A-5
Interpreter
  BASIC-11 — Command Language 6-2, 6-11 to 6-13
Interpreting crash dumps
  interrupt save — Crash Dump Analyzer 4-2
  mapping information — Crash Dump Analyzer 4-1
  stack depth — Crash Dump Analyzer 4-1
    Kernel stack — Crash Dump Analyzer 4-2
    SST — Crash Dump Analyzer 4-2
    $STKDP — Crash Dump Analyzer 4-2
Interrupt
  definition — System Generation (11M) 1-4

Interrupt Control Block
  See ICB
Interrupt entry point
  address — Writing I/O Driver 3-5
Interrupt level — Executive 5-18
Interrupt processing
  fork level — Writing I/O Driver 2-9, 2-15
  priority 7 — Writing I/O Driver 2-14
  priority of interrupting source — Writing I/O Driver 2-14
Interrupt Service Routine
  See ISR
Interrupt timeouts
  error logging — Error Logging 1-6
Interrupt Transfer Block — Executive 5-18
Intersystem file transfer — RMS-11 Utilities 1-2, 6-1
  RMSCNV utility — RMS-11 Utilities 4-1
  RMSRST utility — RMS-11 Utilities 7-1, 7-10
    /FR switch — RMS-11 Utilities 7-7
    version number conversion — RMS-11 Utilities 7-5
Interval report
  IOX — System Management 4-20
INTSV — Crash Dump Analyzer 4-2
$INTSV routine — Writing I/O Driver 2-12, 5-15
  calling with INTSV$ macro — Writing I/O Driver 4-35
  processing at priority of
      interrupting source — Writing I/O Driver 2-15
INTSV$ macro
  description — Writing I/O Driver 4-35
  format — Writing I/O Driver 4-35
$INTXT routine — Writing I/O Driver 5-16
Invoking
  ODT — ODT 1-4, 5-1
  RMSBCK utility — RMS-11 Utilities 6-2
  RMSCNV utility — RMS-11 Utilities 4-3
  RMSDEF utility — RMS-11 Utilities A-5
  RMSDES utility — RMS-11 Utilities 2-2
  RMSDSP utility — RMS-11 Utilities 5-2
  RMSIFL utility — RMS-11 Utilities 3-2
  RMSRST utility — RMS-11 Utilities 7-2
/INVOLUME qualifier
  BRU utility — Utilities 7-17
$IOALT routine — Writing I/O Driver 2-13, 5-17
$$IOB1
  reserved PSECT name — Task Builder E-3
$$IOB2
  reserved PSECT name — Task Builder E-3
$IODON routine — Writing I/O Driver 2-13, 5-17
$IOFIN routine — Writing I/O Driver 5-18
  use of
    by ACP — Writing I/O Driver D-7
/IOP keyword
  INSTALL command — MCR Operations 3-95
    VMR — System Management 10-22
  RUN command — MCR Operations 3-153
IOSTAT — I/O Operations 2-44
IOX
  command
    ABORT — System Management 4-23
    BADBLOCKS — System Management 4-24
    BUFFERSIZE — System Management 4-26
    categories — System Management 4-3
    COMPAREDATA YES/NO — System Management 4-27
    CONFIGURE — System Management 4-28
    CONTROL_C YES/NO — System Management 4-31
    CTRL/C — System Management 4-30
    DENSITY — System Management 4-32
    description — System Management 4-22

IOX
  command (Cont.)
    descriptions System Management 4-22
    DESELECT System Management 4-34
    ERRORLIMIT System Management 4-35
    EXECUTE System Management 4-36
    EXIT System Management 4-37
    files System Management 4-6
    FILES11 System Management 4-38
    HELP System Management 4-39
    in interactive mode System Management 4-19
    INTERLEAVE System Management 4-40
    LOGFILE System Management 4-41
    mode System Management 4-18
    parameter
      by device type System Management 4-9
      with FILES11 System Management 4-8
      with SELECT System Management 4-8
      with VERIFY System Management 4-9
    parameter list
      for Files-11 System Management 4-8
      for NFS volumes System Management 4-8
    PARAMETERLIST System Management 4-42
    PATTERN System Management 4-46
    PRINTSUMMARY System Management 4-47
    PROCEED System Management 4-48
    RANDOM System Management 4-49
    RANGE System Management 4-50
    RECORDS System Management 4-51
    REPORTERRORS YES/NO System Management 4-52
    RESTART System Management 4-53
    RETRIES System Management 4-54
    RUNTIME System Management 4-55
    SELECT System Management 4-56
    SPY System Management 4-58
    START System Management 4-59
    summary with HELP System Management 4-39
    SUMMARYTIME System Management 4-60
    syntax System Management 4-22
    TEMPORARYFILE System Management 4-61
    VERIFY System Management 4-62
    VOLUMECHECK System Management 4-63
    WAIT System Management 4-64
    WRITECHECK System Management 4-65
  considerations for System Management 4-1
  controlling with CTRL/C System Management 4-30
  data
    compare error report System Management 4-21
    pattern checking System Management 4-27
    transfer size of System Management 4-26
  DECtape exercising System Management 4-3
  defaults
    changing during task build System Management 4-22
  device
    exercising steps System Management 4-2
    status display System Management 4-58
    testing
      time of System Management 4-55
  disk exercising System Management 4-2
  error message System Management 4-66
  execution mode System Management 4-18
    entering System Management 4-18
  exercise parameters
    list of general System Management 4-8
  exiting from System Management 4-37
  file-structured exercising System Management 4-3
  increment System Management 4-5

IOX (Cont.)
  indirect command files — System Management 4-6
  installation
    on RSX-11M — System Management 4-4
    on RSX-11M-PLUS — System Management 4-4
  interleaving with Executive — System Management 4-64
  interval report output
      frequency — System Management 4-60
  invoking
    on RSX-11M — System Management 4-5
    on RSX-11M-PLUS — System Management 4-5
    when installed — System Management 4-5
    when not installed — System Management 4-5
    with an increment — System Management 4-5
    without an increment — System Management 4-5
  nonfile-structured exercising — System Management 4-3
  output type
    activity report — System Management 4-19
    interval report — System Management 4-20
    summary report — System Management 4-20
  parameter
    command exercising magtape — System Management 4-11
    default overriding with
        FILES11 — System Management 4-38
    default overriding with
        SELECT — System Management 4-56
    default shown with
        PARAMETERLIST — System Management 4-42
    device-dependent exercise — System Management 4-8
    exercising Files-11 volumes — System Management 4-9
    exercising NFS volume — System Management 4-14
    list of general exercise — System Management 4-8
  parameter command
    category — System Management 4-3
  pattern
    altering test — System Management 4-46
    displaying test — System Management 4-46
  restarting — System Management 4-53
  RSX-11M
    running from — System Management 4-36
  running steps — System Management 4-2
  selecting
    devices — System Management 4-7
    Files-11 volume — System Management 4-7
    NFS volume — System Management 4-7, 4-62
    NFS volume with VERIFY — System Management 4-7
  starting — System Management 4-59
  tape exercising — System Management 4-2
  task termination — System Management 4-18
  task-build file
    location of — System Management 4-22
  termination — System Management 4-37
    using PROCEED — System Management 4-48
  test configuration — System Management 4-28
    adding units — System Management 4-6
    displaying — System Management 4-7
    setting up — System Management 4-6
  testing
    removing devices from — System Management 4-34
  wait-for-event flag — System Management 4-64
  write-check — System Management 4-65
/IP switch — Task Builder 10-22
IRAB pool — RMS-11 Macros 2-5
.IRP directive — PDP-11 MACRO-11 7-17
.IRPC directive — PDP-11 MACRO-11 7-18
ISA
  FORTRAN routines — System Generation (11M) 4-56

ISA (Cont.)
  industrial/laboratory libraries — System Generation (11M) 4-56
ISI field in RAB — RMS-11 Macros 4-2
  CONNECT operation — RMS-11 Macros 5-7
  DELETE operation — RMS-11 Macros 5-25
  DISCONNECT operation — RMS-11 Macros 5-27
  FIND operation — RMS-11 Macros 5-49, 5-51, 5-54
  FLUSH operation — RMS-11 Macros 5-56
  FREE operation — RMS-11 Macros 5-58
  GET operation — RMS-11 Macros 5-60, 5-63, 5-67
  NXTVOL operation — RMS-11 Macros 5-70
  offset — RMS-11 Macros 6-115
  PUT operation — RMS-11 Macros 5-91, 5-95
  READ operation — RMS-11 Macros 5-98, 5-100
  REWIND operation — RMS-11 Macros 5-114
  SPACE operation — RMS-11 Macros 5-120
  summary — RMS-11 Macros 6-121
  TRUNCATE operation — RMS-11 Macros 5-122
  UPDATE operation — RMS-11 Macros 5-124
  WAIT operation — RMS-11 Macros 5-126
  WRITE operation — RMS-11 Macros 5-127, 5-129
ISR — Executive 5-18
ISTAT$ — I/O Operations 7-2, 7-7
ITBDF$ — Crash Dump Analyzer B-25
Item terminator — PDP-11 MACRO-11 3-2

J

/JO switch
  PRI command — Batch and Queue 2-6
Job
  deleting — Batch and Queue 2-10
  holding — Batch and Queue 2-1
  modifying — Batch and Queue 2-1
  releasing — Batch and Queue 2-1
/JOB_PAGE qualifier
  PRINT command — Batch and Queue 2-6
/JOBCOUNT job qualifier
  SET QUEUE command — Batch and Queue 2-20
/JOBCOUNT qualifier
  PRINT command — Batch and Queue 2-3
Jobname parameter
  DELETE command — Batch and Queue 2-10
Jobname switch
  QUE /LI command — Batch and Queue 2-16
Jobname= switch
  PRI command — Batch and Queue 2-4
Journal file
  definition — EDT Editor 1-4
  editing — EDT Editor 3-4
  protecting edits with — EDT Editor 3-1
  saving — EDT Editor 3-5, 7-8
  successive recovery — EDT Editor 3-4
JOURNAL qualifier
  DCL — EDT Editor 4-4
  MCR — EDT Editor 4-6
Journaling — EDT Editor 1-4
  EDT — Introduction 2-17, Gloss-18
$JSR
  predefined syntax element in MML — System Management 12-45

K

K command — ODT 2-9, 7-1
  ZAP utility — Utilities 15-16
k symbol — ODT 2-1, 2-3

K-series — I/O Drivers 22-1
  buffer management — I/O Drivers 22-32
  device support — System Generation (11M) 4-12
  FORTRAN interface — I/O Drivers 22-7 to 22-30
  I/O status block — I/O Drivers 22-32
  MACRO-11 interface — I/O Drivers 22-31
  routine
    generating — I/O Drivers 22-4 to 22-5
K-SERIES lab support routine
  generating — System Generation (11S) 4-9
KBF field in RAB — RMS-11 Macros 4-5
  FIND operation — RMS-11 Macros 5-52
  GET operation — RMS-11 Macros 5-63
  offset — RMS-11 Macros 6-115
  PUT operation — RMS-11 Macros 5-96
  summary — RMS-11 Macros 6-122
/KDS — Crash Dump Analyzer 2-2
Kernel — Introduction 5-4, Gloss-18
Kernel data space dump — Crash Dump Analyzer 3-54
Kernel data space switch — Crash Dump Analyzer 2-4
Kernel instruction space dump — Crash Dump Analyzer 3-54
Kernel instruction space switch — Crash Dump Analyzer 2-4
Kernel Mapping Register switch — Crash Dump Analyzer 2-8
Kernel stack dump — Crash Dump Analyzer 3-1, 3-5
Key — RMS-11 Introduction 3-6
RMS-11 User's Guide 1-5, 1-19, 6-2
  ALT MODE — Command Language 3-12
  alternate — RMS-11 Introduction 3-7
RMS-11 User's Guide 1-7, 1-11
  BACK SPACE — Command Language 3-13
  buffer address
    See KBF field in RAB
  buffer size
    See KSZ field in RAB
  CAPS LOCK — Command Language 3-14
  changeable — RMS-11 Introduction 3-10
    See also XB$CHG mask in FLG field
  characteristics — RMS-11 User's Guide 6-8
    See also FLG field in KEY block
    changeable — RMS-11 User's Guide 6-9
    duplicates — RMS-11 User's Guide 6-8
    null — RMS-11 User's Guide 6-10
  COPY — Command Language 3-14
  CTRL — Command Language 3-18
  cursor-control — Command Language 3-17
  data type — RMS-11 Introduction 3-7
RMS-11 User's Guide 6-3
    See also DTP field in KEY block
    2-byte signed integer — RMS-11 User's Guide 6-4
    4-byte signed integer — RMS-11 User's Guide 6-4
    2-byte unsigned binary — RMS-11 User's Guide 6-5
    4-byte unsigned binary — RMS-11 User's Guide 6-5
    packed decimal — RMS-11 User's Guide 6-6
    string — RMS-11 User's Guide 6-3
  DELETE — Command Language 3-13
  duplicate — RMS-11 Introduction 3-10
    See also XB$DUP mask in FLG field
  ENTER — Command Language 3-12, 3-17
  ESC — Command Language 3-12
  ESCAPE — Command Language 3-12
I/O Drivers 3-22
  LINE FEED — Command Language 3-13
  match criterion — RMS-11 Introduction 3-12
    See also RB$KGE mask in ROP field
    See also RB$KGT mask in ROP field
  name

Key
  name (Cont.)
    See KNM field in KEY block
  NO SCROLL — Command Language 3-14
  null — RMS-11 Introduction 3-10
    See also NUL field in KEY block
  number of — RMS-11 User's Guide 6-2
  position — RMS-11 User's Guide 6-7
  primary — RMS-11 Introduction 3-7; RMS-11 User's Guide 1-7, 1-11
  reference
    See KRF field in RAB
  REPEAT — Command Language 3-14
  RETURN — Command Language 3-2, 3-12, 3-17, 3-22; I/O Drivers 3-22
  RMSDES utility
    numbering — RMS-11 Utilities 2-8, 2-28, 2-38
  rubout — I/O Drivers 3-22, 3-24
  SCROLL — Command Language 3-14
  segment — RMS-11 Introduction 3-10; RMS-11 User's Guide 6-7
  segment count
    See NSG field in KEY block
  segment, position
    See POS field in KEY block
  segment, size
    See SIZ field in KEY block
  SEL — Command Language 3-12
  SHIFT — Command Language 3-14
  size — RMS-11 User's Guide 6-6
    See also TKS field in KEY block
  special — I/O Drivers 2-29
  special character — MCR Operations 2-14
  TAB — Command Language 3-22
  XAB
    See KEY block
KEY block — RMS-11 Introduction 4-8
  chaining to FAB — RMS-11 Macros 2-12 to 2-13
  declaring — RMS-11 Macros 2-8
  initializing — RMS-11 Macros 2-9
  summary — RMS-11 Macros 6-67
Key buffer pool — RMS-11 Macros 2-6
Key information
  RMSDSP utility
    displaying — RMS-11 Utilities 5-4
Key name
  RMSCNV utility — RMS-11 Utilities 4-10
Key of reference
  RMSCNV utility — RMS-11 Utilities 4-10, 4-16
  RMSIFL utility — RMS-11 Utilities 3-8 to 3-9
Key record access — RMS-11 Introduction 3-12
  See also RB$KEY code in RAC field
  to indexed files — RMS-11 User's Guide 5-7, 5-9
  to relative files — RMS-11 User's Guide 4-1
  to sequential files — RMS-11 User's Guide 3-2
Keyboard
  terminal — Command Language 3-1, 3-11
Keypad
  terminal — Command Language 3-1, 3-17
Keypad editing
  advantage — EDT Editor 2-4
  changing case in — EDT Editor 5-48
  command — EDT Editor 1-9
  deleting text in — EDT Editor 5-25
  description — EDT Editor 1-7
  description of keypad diagram — EDT Editor 5-6

Keypad editing (Cont.)
  ending a session — EDT Editor 2-19, 5-9
  entering text in — EDT Editor 5-10
  essential function — EDT Editor 5-7
  how to use — EDT Editor 2-4, 5-2
  reinserting text in — EDT Editor 5-25
  setting direction of cursor movement — EDT Editor 5-15
  starting — EDT Editor 2-5, 5-1
Keypad editor
  See Editor, K52 and Editor, KED
Keypad function — EDT Editor 5-3 to 5-4
  ADVANCE — EDT Editor 5-15
  alternate — EDT Editor 2-8, 5-5
  APPEND — EDT Editor 5-38
  BACK SPACE — EDT Editor 5-19
  BACKUP — EDT Editor 5-15
  BOTTOM — EDT Editor 5-21
  CHAR — EDT Editor 5-16
  CHNGCASE — EDT Editor 2-18 to 2-19, 5-48
  COMMAND — EDT Editor 5-9, 5-47
  control key — EDT Editor 5-53
  CTRL/A — EDT Editor 5-53
  CTRL/C — EDT Editor 5-54
  CTRL/D — EDT Editor 5-53
  CTRL/E — EDT Editor 5-53
  CTRL/K — EDT Editor 5-54
  CTRL/T — EDT Editor 5-53
  CTRL/U — EDT Editor 5-30, 5-48
  CTRL/W — EDT Editor 5-8
  CTRL/Z — EDT Editor 5-8
  CUT — EDT Editor 5-33
  DEL C — EDT Editor 5-26
  DEL EOL — EDT Editor 5-30
  DEL L — EDT Editor 5-32
  DEL W — EDT Editor 5-28
  DELETE — EDT Editor 5-25
  DOWN — EDT Editor 5-13
  ENTER — EDT Editor 5-46, 5-48
  EOL — EDT Editor 5-18
  EXIT — EDT Editor 5-9
  FILL — EDT Editor 5-49, 5-52
  FIND — EDT Editor 5-21
  FNDNXT — EDT Editor 5-23
  GOLD — EDT Editor 5-5
  GOLD integer — EDT Editor 5-7
  HELP — EDT Editor 5-7
  how to use — EDT Editor 2-5
  LEFT — EDT Editor 5-14
  LINE — EDT Editor 5-18
  LINE FEED — EDT Editor 5-28
  OPEN LINE — EDT Editor 5-11
  PAGE — EDT Editor 5-20
  PASTE — EDT Editor 5-33, 5-36
  QUIT — EDT Editor 5-9
  redefining key — EDT Editor 10-1
  REPLACE — EDT Editor 5-40
  RESET — EDT Editor 5-8, 5-34
  RIGHT — EDT Editor 5-14
  SECTION — EDT Editor 5-20
  SELECT — EDT Editor 5-33
  setting tab — EDT Editor 5-53
  SPECINS — EDT Editor 5-48
  standard — EDT Editor 2-8, 5-5
  SUBS — EDT Editor 5-44
  TOP — EDT Editor 5-21

Keypad function (Cont.)
  UND C — EDT Editor 5-27
  UND L — EDT Editor 5-32
  UND W — EDT Editor 5-29
  UP — EDT Editor 5-13
  VT100 — EDT Editor 2-6, 5-4
  VT52 — EDT Editor 2-7, 5-3
  WORD — EDT Editor 5-17
Keypad key
  function — EDT Editor 5-1
  redefining functions of — EDT Editor 10-1
  VT100 — EDT Editor 2-6, 5-4
  VT52 — EDT Editor 2-7, 5-3
Keypad number — EDT Editor 10-3
Keyword — MCR Operations 1-4
  abbreviation — I/O Operations 7-12
  recognition — I/O Operations 7-9
  VMR — System Management 10-4
Keyword table — I/O Operations 7-2
KILL command
  EDI editor — Utilities 2-34
/KIS — Crash Dump Analyzer 2-2
/KMR — Crash Dump Analyzer 2-6
/KN switch
  RMSCNV utility — RMS-11 Utilities 4-10, 4-16
/KNL keyword
  OPEN command — MCR Operations 3-137
KNM field in KEY block
  CREATE operation — RMS-11 Macros 5-18
  DISPLAY operation — RMS-11 Macros 5-30
  offset — RMS-11 Macros 6-68
  OPEN operation — RMS-11 Macros 5-74
  summary — RMS-11 Macros 6-82
/KR switch
  RMSCNV utility — RMS-11 Utilities 4-10, 4-16
  RMSIFL utility — RMS-11 Utilities 3-8 to 3-9
KRF field in RAB — RMS-11 Macros 4-5
  CONNECT operation — RMS-11 Macros 5-7
  FIND operation — RMS-11 Macros 5-51
  GET operation — RMS-11 Macros 5-63
  offset — RMS-11 Macros 6-115
  REWIND operation — RMS-11 Macros 5-114
  summary — RMS-11 Macros 6-123
KSR-33 — I/O Drivers 2-3, 3-2
KSR-35 — I/O Drivers 2-3, 3-2
KSZ field in RAB — RMS-11 Macros 4-5 to 4-6
  FIND operation — RMS-11 Macros 5-52
  GET operation — RMS-11 Macros 5-63
  offset — RMS-11 Macros 6-115
  PUT operation — RMS-11 Macros 5-96
  summary — RMS-11 Macros 6-124
KW11-K — I/O Drivers 22-3
KW11-P
  as system clock — System Generation (11M) 4-14
KW11-Y Watchdog timer — System Generation (11M) 4-15
KWV11-A — I/O Drivers 22-3

L

L command — ODT 2-9, 6-4
L error — PDP-11 MACRO-11 2-1
  summary — PDP-11 MACRO-11 D-4
L register — ODT 2-6, 5-3
LA100 — I/O Drivers 2-3
LA12 — I/O Drivers 2-3
LA120 — I/O Drivers 2-4, 3-3
LA180 — I/O Drivers 10-2

LA180S — I/O Drivers 2-4, 3-3
LA30 — I/O Drivers 2-4, 3-2
LA30-P — I/O Drivers 3-29
LA34 — I/O Drivers 2-4
LA36 — Introduction 1-2; Command Language 3-1, 3-14; I/O Drivers 2-4, 3-2
LA38 — I/O Drivers 2-4
LA50 — I/O Drivers 2-4A
Label — Introduction 4-4, Gloss-18; RMS-11 Introduction 2-5
  field — PDP-11 MACRO-11 2-1 to 2-3
  Indirect — MCR Operations 4-22
    Begin-End block with — MCR Operations 4-28
    branching to — MCR Operations 4-37
    defining — MCR Operations 4-22
    direct access — MCR Operations 4-22
      maximum number of — MCR Operations 4-22
  legal character in — PDP-11 MACRO-11 2-3
  multiple definition — PDP-11 MACRO-11 2-3
  terminator — PDP-11 MACRO-11 3-1
  volume — Command Language 5-28
    Files-11
      specifying — MCR Operations 3-73, 3-77
    overriding — MCR Operations 3-73, 3-122
Label block — Task Builder 2-8
  group — Task Builder B-1
/LABEL keyword
  MOUNT command — MCR Operations 3-121
Labeled magtape volume — Command Language 5-4, 5-35 to 5-36
Laboratory peripheral
  K-series support routine — I/O Drivers 22-1
Laboratory Peripheral Accelerator
  See LPA11-K
Laboratory peripheral system — I/O Drivers 16-1
  clock rate — I/O Drivers 16-33 to 16-34
  device-specific QIO — I/O Drivers 16-3 to 16-9
  FORTRAN interface — I/O Drivers 16-9
    subroutine summary — I/O Drivers 16-11 to 16-28
    synchronous subroutine — I/O Drivers 16-10
  sampling rate — I/O Drivers 16-33 to 16-34
  standard QIO — I/O Drivers 16-2
  status return — I/O Drivers 16-29 to 16-33
LAN field in KEY block
  CREATE operation — RMS-11 Macros 5-19
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-67
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-83
Language
  assembly — Program Development 1-4 to 1-5
    See also MACRO-11
  high-level — Introduction 3-12, 4-12 to 4-13, Gloss-16
    overlay program in — Task Builder 3-39
  source — Introduction 4-4, Gloss-30; Command Language 6-2
  support — Command Language 6-2
Laser printer
  LN01 — I/O Drivers 10-2
LAST
  range specification — EDT Editor 6-8
Layered product
  installing — System Generation (11M) 6-12, 6-19

/LB switch — Task Builder 10-23 to 10-24
  DMP utility — Utilities 11-6
  Indirect — MCR Operations 4-19
LB:
  pseudo device — Command Language 5-6
LBLDF$ macro — Task Builder B-1
LBN — RMS-11 Introduction 2-4; RMS-11 User's Guide 8-11

  See also Placement control
  index file
    specifying — MCR Operations 3-80
LBR — Command Language 6-39 to 6-61; Program Development 1-9

  See also LIBRARY command
  adding a module to a library — Program Development 6-9 to 6-10
  /COMPRESS — Program Development 6-10
  /CR — Program Development 6-2, 6-5
  /CREATE — Program Development 6-1, 6-4 to 6-5
  efficiency — Program Development 1-9
  /FU — Program Development 6-11 to 6-12
  /FULL — Program Development 6-11
  /IN — Program Development 6-10
  /INSERT — Program Development 6-9
  LBR command
    MCR — Program Development 1-9, 6-2
  /LE — Program Development 6-11 to 6-12
  LIBRARY command
    DCL — Program Development 1-9, 6-1
  /LIST — Program Development 6-9, 6-11
  listing information — Program Development 6-11 to 6-12
  /MACRO — Program Development 6-1 to 6-2
  macro library — Program Development 6-1 to 6-3
  module name requirement — Error Logging 4-17
  /NAMES — Program Development 6-11
  /OBJECT — Program Development 6-2, 6-4 to 6-5
  object module library — Program Development 6-4 to 6-6
  .OLB file type — Program Development 6-4
  /REPLACE — Program Development 6-9 to 6-10
  replacing a module in a library — Program Development 6-10 to 6-11
  /RP — Program Development 6-10 to 6-11
  /-SP — Program Development 6-11
LBR command
  MCR — Program Development 1-9, 6-2
    See also LBR
LBR command line
  device-level module — Error Logging 4-37
  DEVSM1 — Error Logging 4-36
  DSP2M1 — Error Logging 4-36
LBR utility
  combining library function — Utilities 10-32
  command line — Utilities 10-8
  default — Utilities 10-8
  error message — Utilities 10-33
  library file
    creating — Utilities 10-12
    deleting — Utilities 10-13
    format — Utilities 10-2
    inserting module — Utilities 10-20
    listing — Utilities 10-21
    replacing module — Utilities 10-23
    spooling — Utilities 10-29
  restriction — Utilities 10-8
  switch — Utilities 10-9
  universal library file
    inserting module — Utilities 10-20

LBR utility
  universal library file (Cont.)
    replacing module — Utilities 10-27
LC command
  EDI editor — Utilities 2-35
/LC switch
  DMP utility — Utilities 11-6
LC symbolic argument — PDP-11 MACRO-11 6-19
LCBDF$ — Crash Dump Analyzer B-26
LCH field in FAB — RMS-11 Macros 3-2
  CREATE operation — RMS-11 Macros 5-13
  ENTER operation — RMS-11 Macros 5-36
  ERASE operation — RMS-11 Macros 5-42
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-74
  PARSE operation — RMS-11 Macros 5-87
  REMOVE operation — RMS-11 Macros 5-104
  RENAME operation — RMS-11 Macros 5-110
  SEARCH operation — RMS-11 Macros 5-117
  summary — RMS-11 Macros 6-53
$LCKPG (Lock page) — System Library 8-30
LCL symbolic argument — PDP-11 MACRO-11 6-41
LCM symbolic argument — PDP-11 MACRO-11 6-19
/LD switch
  PIP utility — Utilities 3-17
LD symbolic argument — PDP-11 MACRO-11 6-12
LD$xx symbol — Writing I/O Driver 3-5
  required by INTSV$ macro — Writing I/O Driver 4-35
LE condition test argument — PDP-11 MACRO-11 6-51
/LE job switch
  QUE /MOD command — Batch and Queue 2-20
/LE switch
  LBR utility — Utilities 10-21
  PRI command — Batch and Queue 2-5
LEAVE statement — Error Logging 5-35
LEFT function — EDT Editor 2-11, 5-14
Legal I/O function mask — Writing I/O Driver 4-12
/LENGTH job qualifier
  SET QUEUE command — Batch and Queue 2-20
/LENGTH qualifier
  BRU utility — Utilities 7-18
  PRINT command — Batch and Queue 2-5
Letter-quality printer — I/O Drivers 2-4
Level
  indexed files — RMS-11 User's Guide 5-4
    data — RMS-11 User's Guide 5-5
    level 0, alternate indexes — RMS-11 User's Guide 5-5
    level 0, primary indexes — RMS-11 User's Guide 5-5
Level count
  listing — PDP-11 MACRO-11 6-9 to 6-10
LEVEL1_INDEX_AREA
  RMSDES utility — RMS-11 Utilities 2-41
Lexical conditionals — Error Logging 5-36
/LGO subkeyword
  CLI command — MCR Operations 3-37
LI command
  EDI editor — Utilities 2-35
/LI switch — PDP-11 MACRO-11 8-6
  Task Builder 10-25
  See also /LIST switch
  CMP utility — Utilities 12-3
  FLX utility — Utilities 4-7
  LBR utility — Utilities 10-21
  PIP utility — Utilities 3-24
    /BR — Utilities 3-25
    /FU — Utilities 3-25
    /TB — Utilities 3-26

/LI switch (Cont.)
  QUE /LI command — Batch and Queue 2-15
  VFY utility — Utilities 9-6
  ZAP utility — Utilities 15-2
/LI:P switch
  QUE /LI command — Batch and Queue 2-15 to 2-16
LIBR
  linking to region — Task Builder 5-14
  option — Task Builder 11-11 to 11-12
Librarian Utility
  See LBR utility
Library
  See also Macro, Object, OTS
  building a — Task Builder 5-14
  cluster — Task Builder 5-44
    — RMS-11 User's Guide 8-7 to 8-9
    building — Task Builder 5-44, 5-48 to 5-51
    building example — Task Builder 5-48 to 5-51
    building rule 1: overlays — Task Builder 5-45
    building rule 2: references — Task Builder 5-46
    building rule 3: .STB file — Task Builder 5-47
    building rule 4: stack — Task Builder 5-47
    building rule 5: PIC — Task Builder 5-47
    building rule 6: traps — Task Builder 5-47
    building rule summary — Task Builder 5-44
    examples — Task Builder 5-47
    overlay run-time support — Task Builder 5-51 to 5-53
    resolving interlibrary references — Task Builder 5-49
  command — MCR Operations 4-19
    default file type for — MCR Operations 4-20
  declaring a — Task Builder 10-23
  default
    controlling symbol search — Task Builder 10-15, 10-19
    global symbol resolution — Task Builder 3-18
    specifying a — Task Builder 10-15
  default search of system TKB — Program Development 4-2
  DIGITAL-supplied — Program Development 1-9
  Executive object
    inserting
      data base object module — System Generation (11S) 4-5
      device driver — System Generation (11S) 4-5
  extending a — Task Builder 10-17
  file
    declaring a — Task Builder 10-23
  FTB
    overlaid region — Task Builder 5-13
  indirect command procedure — Release Notes 1-28
  macro — Command Language 6-41
    — Program Development 6-1 to 6-3
  maintenance — Program Development 6-10 to 6-11
  modules
    .FCTR directive — Task Builder 3-25
  object — Program Development 6-4 to 6-6
    designating in TKB — Program Development 6-6 to 6-9
    system — Program Development 1-11
    using to resolve undefined global symbols — Program Development 6-8 to 6-9
  object module — Command Language 6-41
    — RMS-11 User's Guide 8-1
    placing in overlay structure — Task Builder 10-24
  obtaining information about a user — Program Development 6-11 to 6-12

Library (Cont.)
  old
    overlaid region — Task Builder 5-13
  OTS — Program Development 7-2
  region — Task Builder 2-20
    specifying — Task Builder 10-25
  relocation
    resident — Task Builder A-23
  resident — Task Builder 5-1, 5-3
    RMS-11 User's Guide 8-1, 8-8
    building and linking to a — Task Builder 5-14, 5-31 to 5-38
    data in task image — Task Builder B-4 to B-6
    declaring — Task Builder 11-11, 11-28
    installing — MCR Operations 3-93
    label block 0 — Task Builder B-7
    label block 1 — Task Builder B-9
    label block 2 — Task Builder B-9
    label block 3 — Task Builder B-9
    name block data — Task Builder B-8
    relocation — Task Builder A-23
    RMSRES — RMS-11 User's Guide 8-6, 8-9
    search — Task Builder 10-23
  resolving references
    .FCTR directive — Task Builder 3-25
  RSX-11S subset FCS resident — System Generation (11S) 4-13
  search
    MACRO-11 — Program Development 1-5, 1-10, 2-7
    TKB — Program Development 1-11
  squeezing — Program Development 6-3
  supervisor mode — RMS-11 User's Guide 8-9
  SYSLIB
    replacing as default — Task Builder 10-23
  system — Introduction 4-11, Gloss-18, Gloss-32
    macro (RSXMAC.SML) — Program Development 1-5
    modifications to TKB data structures — Release Notes 1-30
  system macro — System Generation (11S) 4-12
  system object — System Generation (11S) 4-12
  universal — Command Language 6-41
    command procedures in — MCR Operations 4-19
LIBRARY command — Command Language 6-39 to 6-61, 9-21
  DCL — Program Development 1-9, 6-1
    See also LBR
.LIBRARY directive — PDP-11 MACRO-11 6-57
Library file
  See LBR utility
Library file, macro
  force search of — PDP-11 MACRO-11 6-20
  including in assembly — PDP-11 MACRO-11 8-6
/LIBRARY qualifier — PDP-11 MACRO-11 8-12
Library routine
  communication between — System Library 1-1 to 1-2
  placement of — System Library 1-2
  search of — System Library 1-2
  storage — System Library 1-2
LIBRARY/COMPRESS command — Command Language 6-42 to 6-43, 9-21
LIBRARY/CREATE command — Command Language 6-43 to 6-46, 9-21
LIBRARY/DELETE command — Command Language 6-46 to 6-47, 9-22
LIBRARY/EXTRACT command — Command Language 6-47 to 6-48, 9-22

LIBRARY/INSERT command — Command Language 6-48 to 6-50, 9-22
LIBRARY/LIST command — Command Language 6-50 to 6-53, 9-23
LIBRARY/REMOVE command — Command Language 6-54, 9-23
LIBRARY/REPLACE command — Command Language 6-54 to 6-56, 9-23
License — Introduction 5-3, Gloss-19
/LIM switch — Error Logging 2-3
/LIM switch — Error Logging 2-6
/LIMIT — Crash Dump Analyzer 2-6
.LIMIT directive — PDP-11 MACRO-11 6-39
Limit register — ODT 2-6, 5-3
Limit switch — Error Logging 2-3, 2-6
Line
  definition of
    EDT — Introduction 2-16
  displaying — EDT Editor 9-12
  length
    EDT — Introduction 2-16
  number
    EDT — Introduction 2-4, 2-8 to 2-9, Gloss-19
  pointer
    EDT — Introduction 2-5, 2-8 to 2-9, 2-13, Gloss-19
  remote — I/O Drivers 2-41 to 2-42, 3-31 to 3-32
  setting display limit — EDT Editor 9-5
  setting length of — EDT Editor 9-14
  too long to display on screen — EDT Editor 9-12
  truncation
    EDT — Introduction 2-16
  wrapping
    EDT — Introduction 2-16
LINE CHANGE command
  EDI editor — Utilities 2-35
Line continuation
  DCL — Command Language 1-11, 3-12
Line editing
  abbreviating command — EDT Editor 7-1
  asterisk prompt — EDT Editor 2-20, 7-1
  creating files in — EDT Editor 2-20
  deleting line — EDT Editor 7-6
  description — EDT Editor 1-7
  displaying line — EDT Editor 7-20
  ending a session — EDT Editor 7-8, 7-14
  line number — EDT Editor 6-1
  locating text — EDT Editor 7-8
  moving line — EDT Editor 7-11
  returning to with CTRL/Z — EDT Editor 5-8, 7-2
  returning to with EX — EDT Editor 8-10
  starting — EDT Editor 2-20, 7-2
Line editing command — EDT Editor 1-9
  CHANGE — EDT Editor 7-1
  CLEAR — EDT Editor 7-2
  COPY — EDT Editor 2-35, 7-3
  DEFINE KEY — EDT Editor 7-4
  DEFINE MACRO — EDT Editor 7-4
  DELETE — EDT Editor 2-30, 7-6
  EXIT — EDT Editor 2-31, 7-8
  FIND — EDT Editor 7-8
  HELP — EDT Editor 1-3, 7-9
  Implied TYPE (Null) — EDT Editor 2-23, 7-12
  INCLUDE — EDT Editor 2-34, 7-10
  INSERT — EDT Editor 2-21, 7-11
  MOVE — EDT Editor 2-35, 7-11

Line editing command (Cont.)
  Null — EDT Editor 2-23, 7-12
  PRINT — EDT Editor 7-13
  QUIT — EDT Editor 7-14
  QUIT/SAVE — EDT Editor 3-2, 7-14
  REPLACE — EDT Editor 2-27, 7-14
  RESEQUENCE — EDT Editor 2-31, 2-36, 6-3, 7-15
  SET and SHOW — EDT Editor 9-1
  SUBSTITUTE — EDT Editor 2-30, 7-16
  SUBSTITUTE NEXT — EDT Editor 7-19
  TYPE — EDT Editor 2-22, 7-20
  used in keypad editing — EDT Editor 5-46
  WRITE — EDT Editor 2-36, 7-22
Line feed command — ODT 2-5, 4-4
LINE FEED function — EDT Editor 5-28
LINE FEED key — Command Language 3-13
  closing location
    ODT — Program Development 5-5, 5-7
  displaying word on stack
    ODT — Program Development 5-8
  generating task list
    PMT — System Management 13-8
  opening location
    ODT — Program Development 5-5, 5-7
LINE function — EDT Editor 5-18
Line mode
  EDT — Introduction 2-4, Gloss-19
Line number — EDT Editor 1-7
  assigning new — EDT Editor 7-15
  fixed — EDT Editor 1-7
  line editing — EDT Editor 6-1
  resequencing — EDT Editor 6-3
  setting display of — EDT Editor 9-6
Line printer — Introduction 1-14, 3-7, 5-10, 6-2, Gloss-19
  definition — Batch and Queue Gloss-5
  list of — I/O Drivers 10-1
  LP11 — I/O Drivers 10-2
  LS11 — I/O Drivers 10-2
  LV11 — I/O Drivers 10-2
  options — System Generation (11M) 4-78
  ready recovery — I/O Drivers 10-5
  status return — I/O Drivers 10-4 to 10-5
Line printer listing format — PDP-11 MACRO-11 6-5 to 6-6
Line Text Editor
  See EDI editor
/LINES — Crash Dump Analyzer 2-6
/LINES keyword
  SET command — MCR Operations 3-184
    VMR — System Management 10-51
Lines switch — Crash Dump Analyzer 2-7
LINK command — Introduction 4-3, 4-7, 4-11; Command Language 6-1, 6-62 to 6-89, 7-4, 9-23 to 9-25
  DCL — ODT 1-3 to 1-4, 8-1; Program Development 1-5, 4-1, 5-1, 5-9, 6-7
    See also TKB
LINK/C81 command — Command Language 6-87 to 6-89, 9-25
LINK/COBOL command — Command Language 6-87 to 6-89, 9-25
Linker — PDP-11 MACRO-11 1-2, 2-2
Linking
  module — Task Builder 2-3
  ODT — ODT 1-2

Linking
  ODT (Cont.)
    DCL — ODT 1-3
    MCR — ODT 1-2
    PDS — ODT 1-3
  overview of — PDP-11 MACRO-11 4-1
  RSX-11M-PLUS feature — ODT 1-3
LIST command
  EDI editor — Program Development 2-13
List command — ODT 2-9, 6-4
.LIST directive — PDP-11 MACRO-11 6-9 to 6-14
  arguments for — PDP-11 MACRO-11 6-10 to 6-12
LIST ON PSEUDO DEVICE command
  EDI editor — Utilities 2-36
LIST ON TERMINAL command
  EDI editor — Utilities 2-35
List option
  ACNT — System Management 2-6 to 2-7
/LIST qualifier — PDP-11 MACRO-11 8-10
LIST statement — Error Logging 5-39
/LIST switch
  See also /LIST switch
  BAD utility — Utilities 6-5
.LIST TTM directive — Program Development 2-6
Listing
  assembly — Program Development 3-4 to 3-5
  control — Program Development 1-4 to 1-5, 2-6
  device
    specifying — ODT 6-2, 6-5
  directory — Program Development 3-9
  examining at a terminal — Program Development 3-6, 7-4
  format
    memory — ODT 6-5
    Trace program — ODT 8-2
  format of — PDP-11 MACRO-11 6-4
  FORTRAN IV — Program Development 7-5
  global cross-reference — Program Development 4-5 to 4-6
    generating as — Task Builder 10-11
  printing — Program Development 3-8 to 3-9
  sample assembly — PDP-11 MACRO-11 H-1 to H-3
  spooling — Program Development 3-8 to 3-9
  use in debugging — Program Development 5-4
  wide
    specifying a — Task Builder 10-51
Listing control
  See also .LIST or .NLIST directive
  comment block — PDP-11 MACRO-11 6-18
  directive — PDP-11 MACRO-11 6-3 to 6-18
    arguments for — PDP-11 MACRO-11 6-11 to 6-12
    .IDENT — PDP-11 MACRO-11 6-16 to 6-17
    .LIST — PDP-11 MACRO-11 6-9 to 6-14
    .NLIST — PDP-11 MACRO-11 6-9 to 6-14
    .PAGE — PDP-11 MACRO-11 6-17 to 6-18
    .REM — PDP-11 MACRO-11 6-18
    .SBTTL — PDP-11 MACRO-11 6-15 to 6-16
    .TITLE — PDP-11 MACRO-11 6-15
  level count — PDP-11 MACRO-11 6-9 to 6-10
  MAC task command — PDP-11 MACRO-11 8-6 to 8-7
  page ejection — PDP-11 MACRO-11 6-17
  switch — PDP-11 MACRO-11 8-6 to 8-7
    /CR — PDP-11 MACRO-11 8-7
    /LI — PDP-11 MACRO-11 8-6
    /NL — PDP-11 MACRO-11 8-6
    /NOSP — PDP-11 MACRO-11 8-7
    /SP — PDP-11 MACRO-11 8-7

Listing control directive
  arguments for — PDP-11 MACRO-11 6-10
Listing file
  FLX utility — Utilities 4-7
  PIP utility — Utilities 3-24
Listing level count — PDP-11 MACRO-11 6-9 to 6-10
LISTING_DIRECTIVES argument — PDP-11 MACRO-11 8-11
Literal declaration — Error Logging 4-12
LITERAL statement — Error Logging 5-33
/LN switch
  CMP utility — Utilities 12-3
LN01 — I/O Drivers 10-2
/LO job switch
  QUE /MOD command — Batch and Queue 2-20
/LO switch
  Indirect — MCR Operations 4-21
  RMSCNV utility — RMS-11 Utilities 4-10
  RMSIFL utility — RMS-11 Utilities 3-6
  VFY utility — Utilities 9-6
LOA command — Writing I/O Driver 4-35
  action if UC.PWF set — Writing I/O Driver 2-4
  effect of
    when loading driver — Writing I/O Driver 3-8
  loading driver — Writing I/O Driver 3-2, 3-12
$$LOAD
  PSECT — Task Builder 5-53
  reserved PSECT name — Task Builder E-3
$LOAD
  predefined syntax element in
      MML — System Management 12-45
LOAD command — MCR Operations 3-105
  command line format — MCR Operations 3-105
  error message — MCR Operations 3-107
  example — MCR Operations 3-106
  keyword
    /HIGH — MCR Operations 3-106
    /PAR — MCR Operations 3-105
    /SIZE — MCR Operations 3-106
  pool requirements — MCR Operations 3-107
  VMR — System Management 10-27
    command line format — System Management 10-27
    example — System Management 10-28
    keyword
      /PAR — System Management 10-27
      /SIZE — System Management 10-27
LOAD module — Task Builder 5-53
$LOAD routine
  in manual load — Task Builder 4-7
Load test
  UETP — System Management 9-2
Loadable data base
  advantage — Writing I/O Driver 3-8
  assembling — Writing I/O Driver 3-9
  characteristics — Writing I/O Driver 3-8
Loadable driver
  assembling — Writing I/O Driver 3-9
  benefit — Writing I/O Driver 1-1
  combination with data base — Writing I/O Driver 3-1
  debugging — Writing I/O Driver 3-8
  definition — Writing I/O Driver 1-1
  incorporating
    with data base — Writing I/O Driver 3-8
  linking
    with loadable data base — Writing I/O Driver 3-3
    with resident data base — Writing I/O Driver 3-3
  loading
    into memory — Writing I/O Driver 3-2, 3-12

Loadable driver (Cont.)
  rebuilding and reincorporating
    after debugging — Writing I/O Driver 3-30
  removing
    from memory — Writing I/O Driver 3-2
  task-building
    mapped system — Writing I/O Driver 3-10
    unmapped system — Writing I/O Driver 3-11
    with resident data base — Writing I/O Driver 3-12
Loading
  asynchronous example of — Task Builder 4-10
  mechanism
    overlay — Task Builder 3-16
Loading files — RMS-11 User's Guide 1-10, 1-12
LOC field in ALL block
  CREATE operation — RMS-11 Macros 5-17
  EXTEND operation — RMS-11 Macros 5-47
  offset — RMS-11 Macros 6-2
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-12
/LOC keyword
  HELP command — MCR Operations 3-65
LOC symbolic argument — PDP-11 MACRO-11 6-11
LOC0 field in ALL block
  offset — RMS-11 Macros 6-2
LOC1 field in ALL block
  offset — RMS-11 Macros 6-2
LOCAL argument — PDP-11 MACRO-11 8-9
Local data block — Program Development 2-8
Local macro — Program Development 2-8
  definitions — Program Development 2-8
Local symbol — Introduction 4-7, Gloss-19
  PDP-11 MACRO-11 3-11 to 3-12
  Program Development 1-4 to 1-5
  accessing — MCR Operations 4-21
  automatic creation — PDP-11 MACRO-11 7-8 to 7-9
  Begin-End block with — MCR Operations 4-3, 4-28
  block
    enabling — PDP-11 MACRO-11 3-11 to 3-12
  definitions — PDP-11 MACRO-11 6-19 to 6-20
  deleting definition of — Program Development 2-7 to 2-8
  reserved — MCR Operations 4-35
  treatment as user-defined — MCR Operations 4-17
<LOCAL> symbol — PDP-11 MACRO-11 3-7
LOCATE command
  EDI editor — MCR Operations 4-9
Locate Directory Entry — Program Development 2-14, 2-18, 7-4 to 7-5, 7-7
Locate mode — Utilities 2-15, 2-36
  See also RB$LOC mask in ROP field
  GET$ — I/O Operations 4-13
  GET$ operations — I/O Operations 1-6
  indexed files — RMS-11 Introduction 4-6
  PUT$ — I/O Operations 3-18
  relative files — I/O Operations 3-21
  sequential files — RMS-11 User's Guide 7-7
Locating text
  keypad editing — I/O Operations 3-27
  line editing — RMS-11 User's Guide 4-13
  nokeypad editing ('string') — RMS-11 User's Guide 3-14
Location
  See also LOC field in ALL block
  altering — EDT Editor 5-21
  closing — EDT Editor 7-8
  displaying — EDT Editor 8-4

Location (Cont.)
  hard
    See also XB$HRD mask in AOP field
  RMSDEF utility — RMS-11 Utilities A-14
Location counter — Program Development 1-4 to 1-5
  See also Current location counter
  control directive — PDP-11 MACRO-11 6-36
  definition — Task Builder A-17
  modification — Task Builder A-18
  use in debugging — Program Development 5-3 to 5-4
Location indicator
  See Register indicator
/LOCK keyword
  default value
    specifying — MCR Operations 3-121
  DISMOUNT command — MCR Operations 3-50
  MOUNT command — MCR Operations 3-121
  option
    Nounload — MCR Operations 3-50, 3-121
    Unload — MCR Operations 3-51, 3-121
    Virtual — MCR Operations 3-51, 3-121
Locked file — Command Language 4-75 to 4-76, 9-47
Locking buckets — RMS-11 Introduction 4-3
Locking, file
  See FB$DLK mask in FOP field
Log — Introduction Gloss-19
Log file
  disabling — System Management 3-5
  example — System Management 3-8
  reading — System Management 3-8
  reassigning — System Management 3-6
  task communication to — System Management 3-2
  use of log file defaults — System Management 3-6
  using PIP to read — System Management 3-8
/LOG keyword
  DEVICES command — MCR Operations 3-46
/LOG switch — Error Logging 2-3, 2-5, 2-8
Log switch — Error Logging 2-3, 2-5, 2-8
  New version subswitch — Error Logging 2-3, 2-6
  No limit subswitch — Error Logging 2-3, 2-5 to 2-6
<LOGDEV> symbol — MCR Operations 4-14
$LOGER — Error Logging 4-23
LOGFILE YES/NO command
  IOX — System Management 4-41
Logging
  console output — System Management 3-1
  messages
    Console Logger — System Management 3-2
Logging in — Introduction 1-5 to 1-7, Gloss-20; Command Language 3-2, 4-2; MCR Operations 3-57
  disabling — MCR Operations 3-59
Logging out — Introduction 1-21, Gloss-20; Command Language 3-2; MCR Operations 3-31
Logical
  address — Task Builder 2-14
  address space — Task Builder 2-14
  block number
    See LBN
  end-of-file directive (/) — MCR Operations 4-42
    example — MCR Operations 4-43
    format — MCR Operations 4-42
  name
    assigning — MCR Operations 3-16

Logical
  name (Cont.)
    determining physical device associated with — MCR Operations 4-53
    syntax — MCR Operations 3-16
  symbol — MCR Operations 4-7
    defining — MCR Operations 4-48
    testing — MCR Operations 4-39, 4-41
  test — MCR Operations 4-38
    compound — MCR Operations 4-42
      example — MCR Operations 4-42
  unit number
    See also LUN
    assigning physical device to a — Task Builder 11-7
  unit table entry — Task Builder B-9, B-14
  units
    number of — Task Builder 11-37
Logical address space — Executive 3-2
Logical AND operator — PDP-11 MACRO-11 3-2, 3-5
  special meaning — PDP-11 MACRO-11 6-52
Logical block — RMS-11 Introduction 2-3
  RCT — System Management 5-2
  reading — I/O Drivers 1-28
  writing — I/O Drivers 1-29
Logical block number
  See LBN
Logical channel number
  See LCH field in FAB
Logical device — I/O Drivers 1-18
Logical device name — Crash Dump Analyzer 3-17
Logical end-of-tape — I/O Drivers 9-8
Logical I/O — I/O Drivers 1-2
Logical inclusive OR operator — PDP-11 MACRO-11 3-2, 3-5
  special meaning — PDP-11 MACRO-11 6-52
Logical name — Command Language 5-5, 5-8, 5-13 to 5-15
  assigning — System Management 10-9
Logical operator
  See Operator, binary
Logical page
  definition — Batch and Queue Gloss-5
Logical unit number — I/O Drivers 1-17
  See also LUN
  assigning — I/O Operations 4-12
  changing assignment — I/O Drivers 1-7
  parameter to FDOP$A — I/O Operations 2-13
  retrieving — I/O Drivers 1-21
LOGICAL UNIT NUMBERS command — MCR Operations 3-113
  VMR — System Management 10-29
Logical unit table — Command Language 5-8, 5-18 to 5-19
  See also LUT
Login
  See also Logging in
  disabling — MCR Operations 3-59, 3-184; System Management 10-51
  enabling — MCR Operations 3-184; System Management 10-51
  silent — MCR Operations 3-57
    specifying — MCR Operations 3-38
  text file — MCR Operations 3-60

LOGIN command — Introduction 1-5, Gloss-20; Command Language 3-3 to 3-6, 3-9, 9-25; MCR Operations 3-57
  command line format — MCR Operations 3-59
  error message — MCR Operations 3-62
  example — MCR Operations 3-61
  time limit — MCR Operations 3-59
/LOGIN keyword
  ASSIGN command — MCR Operations 3-17
LOGIN.CMD file — Command Language 3-4
LOGIN.TXT file — Command Language 3-4
/LOGON keyword
  SET command — MCR Operations 3-184
    VMR — System Management 10-51
Logout
  See also Logging out
  silent — MCR Operations 3-31
    specifying — MCR Operations 3-38
LOGOUT command — Introduction 1-21 to 1-22, Gloss-20; Command Language 3-7 to 3-8, 5-13, 5-45, 9-25
LOGTST
  ERROR routines — Error Logging 4-23
<LOGUIC> symbol — MCR Operations 4-14
%LOK — Error Logging 5-21
Lookahead function — Error Logging 5-21
Lost file
  recovering
    VFY utility — Utilities 9-6
Low core memory dump — Crash Dump Analyzer 1-6, 3-2, 3-20
/LOW switch
  PRI command — Batch and Queue 2-4
Low-memory context — Task Builder B-10
/LOWER keyword
  SET command — MCR Operations 3-184
    VMR — System Management 10-51
LOWER_CASE argument — PDP-11 MACRO-11 8-10
Lowercase — Introduction 1-18
  character
    converting — MCR Operations 3-184; System Management 10-51
  mode — MCR Operations 4-33
/LOWERCASE job qualifier
  SET QUEUE command — Batch and Queue 2-20
/LOWERCASE qualifier
  PRINT command — Batch and Queue 2-4
LP command
  EDI editor — Utilities 2-36
LP11 — I/O Drivers 10-2
LPA11-K — I/O Drivers 21-1
  22-bit addressing — I/O Drivers 21-36
  buffer management — I/O Drivers 21-32 to 21-33
  device-specific QIO — I/O Drivers 21-27 to 21-29
  FORTRAN interface — I/O Drivers 21-2 to 21-27
  I/O status block — I/O Drivers 21-30 to 21-32
  microcode — I/O Drivers 21-34 to 21-35
  time-out — I/O Drivers 21-35
  unloading driver — I/O Drivers 21-35
LPS11 — I/O Drivers 16-1 to 16-2
LQP02 — I/O Drivers 2-4
LRL field in FAB
  CREATE operation — RMS-11 Macros 5-20
  offset — RMS-11 Macros 6-24

LRL field in FAB (Cont.)
  OPEN operation — RMS-11 Macros 5-79
  summary — RMS-11 Macros 6-54
/LRU keyword
  HOME command — MCR Operations 3-72
  INI command — MCR Operations 3-82
  MOUNT command — MCR Operations 3-121
LS11 — I/O Drivers 10-2
LSB symbolic argument — PDP-11 MACRO-11 6-19 to 6-20
.LST file type — Program Development 3-4, 6-11, 7-3 to 7-4
.LST module — Error Logging 4-1
$LUIC
  predefined syntax element in MML — System Management 12-45
LUN — Introduction 5-11, Gloss-20; Writing I/O Driver 2-19; Command Language 5-5, 5-7, 5-18 to 5-19, 7-57 to 7-58; MCR Operations 2-10
  See also Logical unit number
  assigning — MCR Operations 2-10
  assignment
    changing — MCR Operations 3-143; System Management 10-32
    displaying — MCR Operations 3-113; System Management 10-29
  default by TKB — Program Development 4-4 to 4-5
  preinitiation processing of — Writing I/O Driver 2-11
LUN command — MCR Operations 3-113
  command line format — MCR Operations 3-113
  error message — MCR Operations 3-113
  example — MCR Operations 3-113
  VMR — System Management 10-29
    command line format — System Management 10-29
    example — System Management 10-29
LV11 — I/O Drivers 10-2
LVL field in KEY block
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-67
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-84
/LW switch
  DMP utility — Utilities 11-7
LX: — Error Logging 3-2

M

M command
  EDI editor — Utilities 2-38
M error — PDP-11 MACRO-11 2-3, 3-1 to 3-2, 3-8
  summary — PDP-11 MACRO-11 D-4
M register — ODT 2-6, 5-3
m symbol — ODT 2-1
/MA switch — Task Builder 10-26
  RMSCNV utility — RMS-11 Utilities 4-10
MAC command
  MCR — Program Development 1-4, 3-1, 3-5, 6-3
    See also MACRO-11
.MAC file type — Program Development 3-1
MAC task — Program Development 1-4
  See also MACRO-11
  command format — PDP-11 MACRO-11 8-4 to 8-6
  cross-reference listing — PDP-11 MACRO-11 8-16
  error message — PDP-11 MACRO-11 8-19 to 8-21

MAC task (Cont.)
  listing control — PDP-11 MACRO-11 8-6 to 8-7
  running by indirect command — PDP-11 MACRO-11 8-3
  running directly — PDP-11 MACRO-11 8-2
Machine code
  binary — Introduction 4-5 to 4-6, 4-12, Gloss-4
Macro — EDT Editor 7-4; Introduction 4-13, Gloss-20; RMS-11 Introduction 4-7
  See also DEFINE MACRO
  call — PDP-11 MACRO-11 7-1
    cross-reference of symbols — Program Development 3-7 to 3-8
    resolution — Program Development 1-4, 1-10, 2-7
    unrecognized — Program Development 2-7
  definition — EDT Editor 1-5
  directive — PDP-11 MACRO-11 7-1
    See also .MACRO directive
  expansion — PDP-11 MACRO-11 7-1
    terminating — PDP-11 MACRO-11 7-3
  expansion listing — PDP-11 MACRO-11 6-9
  keyword indicator — PDP-11 MACRO-11 3-1
  library — Program Development 6-1 to 6-3
    adding modules — Program Development 6-9 to 6-10
    creating a user — Program Development 6-1 to 6-3
    definitions — Program Development 6-3 to 6-4
    DIGITAL-supplied — Program Development 1-9
    force search of — PDP-11 MACRO-11 6-20
    including in assembly — PDP-11 MACRO-11 8-6
    listing information — Program Development 6-11 to 6-12
    replacing modules — Program Development 6-10 to 6-11
    search of system — Program Development 1-5, 1-10, 2-7
  library directive
    See .MCALL directive
  name — PDP-11 MACRO-11 7-1
  nesting — PDP-11 MACRO-11 7-3
  SNAP$ — Task Builder D-6
  SNPBK$ — Task Builder D-6
  SNPDF$ — Task Builder D-6
  symbol — PDP-11 MACRO-11 3-6
    definition — Program Development 1-4, 1-10, 2-7, 6-4
  symbol table — PDP-11 MACRO-11 3-6 to 3-7
Macro call — I/O Operations 2-2; PDP-11 MACRO-11 7-4
  See also .MCALL directive
  argument in — PDP-11 MACRO-11 7-4 to 7-5
  assembly time — I/O Operations 2-2
  file-processing — I/O Operations 2-2; System Generation (11S) 2-23
  format — PDP-11 MACRO-11 7-4
  numeric argument indicator — PDP-11 MACRO-11 3-3
  run-time — I/O Operations 2-2
  unary operator in — PDP-11 MACRO-11 7-5
MACRO CALL command
  EDI editor — Utilities 2-37
MACRO command — Introduction 4-5, 4-11, 4-13; PDP-11 MACRO-11 8-8 to 8-12; Command Language 6-2 to 6-11, 9-26
  DCL — Program Development 1-4, 3-1, 3-4, 6-3
    See also MACRO-11
  EDI editor — Utilities 2-36

Macro definition — PDP-11 MACRO-11 7-1 to 7-4
  argument concatenation — PDP-11 MACRO-11 7-10 to 7-11
  argument in — PDP-11 MACRO-11 7-4 to 7-6
  argument limit — PDP-11 MACRO-11 7-8
  argument passing — PDP-11 MACRO-11 7-7
  attribute — PDP-11 MACRO-11 7-11 to 7-14
  deletion — PDP-11 MACRO-11 7-21
  dummy argument — PDP-11 MACRO-11 7-2
  error notice — PDP-11 MACRO-11 7-15 to 7-16
  format — PDP-11 MACRO-11 7-4
  keyword argument — PDP-11 MACRO-11 7-9
  name — PDP-11 MACRO-11 7-2
  nesting — PDP-11 MACRO-11 7-3, 7-5 to 7-6
  single argument — PDP-11 MACRO-11 7-16
  special characters in — PDP-11 MACRO-11 7-6
.MACRO directive — PDP-11 MACRO-11 7-1 to 7-2, 7-10
MACRO EXECUTE command
  EDI editor — Utilities 2-38
MACRO IMMEDIATE command
  EDI editor — Utilities 2-38
Macro library — Command Language 6-41
  RMSMAC.MLB — RMS-11 Macros 2-20
  RSTS/E — RMS-11 Macros D-3
Macro MetaLanguage
  See MML
Macro name convention — Executive 1-5
MACRO-11 — Program Development 1-5; RMS-11 User's Guide 1-13
  address mode summary — PDP-11 MACRO-11 B-2
  and ODL files — RMS-11 User's Guide 8-5
  assembling source file — Program Development 3-1 to 3-2
  changes made to — Release Notes 1-33
  coding standard — PDP-11 MACRO-11 E-1 to E-16
  /CR — Program Development 1-8, 3-8
  cross-reference listing — Program Development 1-5, 1-7, 3-7 to 3-8
  /CROSS_REFERENCE — Program Development 1-8, 3-7
  data storage
    definition — Program Development 2-8
  default search of system
    library — Program Development 1-5, 1-10, 2-7
  defining local symbols — Program Development 2-7 to 2-8
  directive summary — PDP-11 MACRO-11 B-3 to B-8
  directives — Program Development 1-4 to 1-5
  /DISABLE:GLOBAL — Program Development 3-1
  disabling global default — Program Development 3-1 to 3-2
  /DS:GBL — Program Development 3-1
  error — Program Development 3-2 to 3-4
  error code
    A — Program Development 3-2 to 3-3
    E — Program Development 3-4
    Q — Program Development 3-4
    U — Program Development 3-3
  error code summary — PDP-11 MACRO-11 D-1 to D-5
  error message — PDP-11 MACRO-11 8-19 to 8-21; Program Development 3-2, 3-5
  file specification
    switch — PDP-11 MACRO-11 8-3 to 8-5; PDP-11 MACRO-11 8-6
  key segments — RMS-11 User's Guide 6-7
  /LIBRARY — Program Development 6-3
  /LIST — Program Development 3-1, 3-4 to 3-5, 3-7
  listing
    generation — Program Development 3-4 to 3-5; Program Development 3-6
  location counter — Program Development 1-4 to 1-5
  MAC command

MACRO-11
  MAC command (Cont.)
    MCR — Program Development 1-4, 3-1, 3-5, 6-3
  macro
    cross-reference — Program Development 3-7 to 3-8
    library usage — Program Development 6-3 to 6-4
    symbol — Program Development 1-4, 2-7, 6-4
  MACRO command
    DCL — Program Development 1-4, 3-1, 3-4, 6-3
  /ML — Program Development 6-3 to 6-4
  /NOOBJECT — Program Development 3-1
  /OBJECT — Program Development 3-4
  object module — Program Development 3-4 to 3-6
  obsolete functions — PDP-11 MACRO-11 I-1
  operating hints — PDP-11 MACRO-11 F-1
  operating procedures — PDP-11 MACRO-11 8-1
  placement control — RMS-11 User's Guide 6-14
  populating files — RMS-11 User's Guide 6-27
  position independent code — PDP-11 MACRO-11 G-1
  source file — Program Development 2-2
    cross-referencing symbols
      CRF utility — Utilities B-1
    format — Program Development 2-1 to 2-3
    skeleton — Program Development 2-4
  source input — Program Development 1-4
  /-SP — Program Development 3-5, 3-8
  special character summary — PDP-11 MACRO-11 B-1
  statement format — PDP-11 MACRO-11 2-1; Program Development 2-3
  symbol
    cross-reference — Program Development 3-7 to 3-8
    evaluation — Program Development 1-4, 3-1 to 3-2, 6-4
  table of contents generation — Program Development 2-6
  work file — PDP-11 MACRO-11 F-1
MACRO-11 Assembler — Command Language 6-2 to 6-11, 9-26, B-2
MACRO-11 Assembly Language — Introduction 4-3 to 4-5, 4-12, Gloss-3 to Gloss-4, Gloss-20
MACRO-11 calling sequence
  manual load — Task Builder 4-7
    I- and D-space tasks — Task Builder 4-8 to 4-9
MACRO-11 programs
  increasing FSR size — I/O Operations 2-40
Macro-declaration macro — RMS-11 Macros 2-2
Macro-name
  defining — EDT Editor 7-4
MAG — I/O Operations G-10
MAG command
  format — I/O Operations G-10
MAG SET
  /BS — I/O Operations G-10
  /CC — I/O Operations G-11
  /EOF — I/O Operations G-11
  /POS — I/O Operations G-16
  /REWIND — I/O Operations G-12, G-16
  /RS — I/O Operations G-12
MAG SET /EOT — I/O Operations G-11
MAG SET /EOV — I/O Operations G-11
MAG SET /INITIALIZE — I/O Operations G-11
MAG SET /POS — I/O Operations G-11
MAG SET command — I/O Operations G-10, G-16
  error messages — I/O Operations G-13 to G-15
  example — I/O Operations G-12

Magnetic tape
  See Magtape
  See Tape
Magnetic Tape ACP
  See MTAACP
Magtape — I/O Operations 5-4; Command Language 1-10, 5-4, 5-12, 5-27; I/O Drivers 8-1; RMS-11 Introduction 2-4; RMS-11 Macros 3-2, 5-20, 5-37, 5-43, 5-77, 5-88, 5-104, 5-111, 5-118
  See also Medium
  See also Tape
  access protection
    specifying — MCR Operations 3-77
  ANSI — Command Language 5-4, 5-34 to 5-36; RMS-11 Macros 3-2, 5-20, 5-37, 5-43, 5-77, 5-88, 5-104, 5-111, 5-118
    mounting — MCR Operations 3-116
    protection
      overriding — MCR Operations 3-122
    specifying — MCR Operations 3-121
  block size
    specifying — MCR Operations 3-119
  character translation
    specifying — MCR Operations 3-124
  closing a file — I/O Operations 5-8
  closing volume — I/O Operations 4-25
  density
    displaying in IOX — System Management 4-32
    specifying — MCR Operations 3-79
    specifying in IOX — System Management 4-32
  density selection — I/O Drivers 8-15
  device-specific QIO — I/O Drivers 8-4 to 8-9
  examples — I/O Operations 5-9 to 5-10
  exercise
    example — System Management 4-11
    using SELECT — System Management 4-11
  exercising
    in IOX — System Management 4-2
  expiration date
    overriding — MCR Operations 3-122
  Files-11 — MCR Operations 2-1
    initializing — MCR Operations 3-76
    owner
      specifying — MCR Operations 3-83
  HDR3 label
    specifying — MCR Operations 3-120
  label — RMS-11 Introduction 2-5
  list of — I/O Drivers 8-2
  mounting — Command Language 5-38 to 5-40; MCR Operations 3-114
  multiple-file operations — I/O Operations 5-6
  overriding FCS defaults — I/O Operations 5-6 to 5-7
  P/OS — RMS-11 Macros D-3
  position to EOT — I/O Operations 4-25
  positioning — I/O Operations 5-5, G-11
    See also FB$NEF mask in FOP field
    See also FB$POS mask in FOP field
    See also RB$EOF mask in ROP field
  processing examples — I/O Operations 5-7
  reading a file — I/O Operations 5-8
  reading IBM — I/O Operations G-18 to G-19

Magtape (Cont.)
  record
    number of characters
      specifying — MCR Operations 3-123
    type
      specifying — MCR Operations 3-119
  records tested — System Management 4-51
  retries upon error — System Management 4-54
  rewind-after-closing
    See FB$RWC mask in FOP field
  rewind-before-creating
    See FB$RWO mask in FOP field
  rewind-before-opening
    See FB$RWO mask in FOP field
  rewinding — I/O Operations 4-25
  rewinding file on — I/O Operations 4-25
  RMSBCK utility — RMS-11 Utilities 6-7
    multivolume — RMS-11 Utilities 6-9
  RMSCNV utility — RMS-11 Utilities 4-8
  RMSDEF utility — RMS-11 Utilities A-8, A-10
  RMSDES utility — RMS-11 Utilities 2-34
  RMSDSP utility — RMS-11 Utilities 5-3
  RMSRST utility — RMS-11 Utilities 7-8 to 7-9
  select recovery — I/O Drivers 8-13
  set — MCR Operations 3-116
    naming — MCR Operations 3-117
  single-file operations — I/O Operations 5-5
  standard QIO — I/O Drivers 8-4
  status return — I/O Drivers 8-10 to 8-12
  tape mark — RMS-11 Introduction 2-5
  testing
    altering record count — System Management 4-51
  translation — I/O Operations G-16
  unlabeled
    specifying — MCR Operations 3-121
  volume — RMS-11 Introduction 2-5
Magtape ACP
  See MTAACP
Magtape block size
  See BLS field in FAB
Magtape Control Task — I/O Operations G-10
Magtape position — I/O Operations 2-15
Magtape volume
  access — I/O Operations 5-4
  ANSI — Command Language 5-4, 5-34 to 5-36
  creating multiple file — I/O Operations 5-6
  labeled — Command Language 1-10, 5-4, 5-12, 5-35 to 5-36
  rewinding — I/O Operations 5-5
  unlabeled — Command Language 5-4, 5-35 to 5-36
Magtape volume set
  rewinding — I/O Operations 5-5
MAGTAPE_BLOCK_SIZE
  RMSDES utility — RMS-11 Utilities 2-34
/MAIN keyword
  SET command — MCR Operations 3-185
    VMR — System Management 10-51
MAIN text buffer — EDT Editor 1-2
  inserting text into — EDT Editor 2-1, 6-6
.MAIN. default name — PDP-11 MACRO-11 6-15
Maintaining files — RMS-11 User's Guide 1-10, 1-12
  backing up files — RMS-11 User's Guide 1-10, 1-12
  converting files — RMS-11 User's Guide 1-10, 1-12
  designing and creating files — RMS-11 User's Guide 1-10, 1-12
  displaying files — RMS-11 User's Guide 1-10, 1-12

Maintaining files (Cont.)
  loading files — RMS-11 User's Guide 1-10, 1-12
  restoring files — RMS-11 User's Guide 1-10, 1-12
Manual load
  calling sequence — Task Builder 4-7 to 4-8
  error handling — Task Builder 4-12
  FORTRAN calling sequence — Task Builder 4-9 to 4-10
    for I- and D-space task — Task Builder 4-11
  MACRO-11 calling sequence — Task Builder 4-7
    I- and D-space tasks — Task Builder 4-8 to 4-9
/MANUAL switch
  BAD utility — Utilities 6-6
  FMT utility — Utilities 5-8
Map
  common — Task Builder 5-19
  debugging use — Program Development 5-2, 5-8
  examining at terminal — Program Development 4-6
  file
    adding cross-reference to a — Task Builder 10-11
    content — Task Builder 10-37 to 10-43
    description — Task Builder 10-37 to 10-43
    example — Task Builder 10-37 to 10-43
    general — Task Builder 10-37 to 10-43
    inhibiting spooling of a — Task Builder 10-45
    printing — Task Builder 1-2
    specifying — Task Builder 10-26
  full — Program Development 4-7
  generating — Program Development 4-5 to 4-7
  including SYSLIB contribution — Task Builder 10-26
  privileged task — Task Builder 6-10 to 6-11
  reducing width — Program Development 4-5 to 4-6
  region — Task Builder 5-19
  resident region
    including symbol definition — Task Builder 10-26
  short
    specifying a — Task Builder 10-37 to 10-43
  spooling to print — Task Builder 10-45
  stack limits — Program Development 5-8
  standard — Program Development 4-5 to 4-6
  task
    linked to a common — Task Builder 5-24
Map Address Window directive — Executive 5-100
Map device — System Generation (11M) 4-21
.MAP file type — Program Development 4-6
MAP macro
  MML — System Management 12-31 to 12-34
MAP$ — Executive 5-101
Mapped
  array
    area — Task Builder 5-56, 5-58
    declaration — Task Builder A-10
    declaration entry — Task Builder A-10
  baseline system
    bootstrapping — System Generation (11M) 4-2
  region
    declaring address window — Task Builder 11-39
  system
    definition — System Generation (11M) 1-5
Mapped system — Executive 3-2
<MAPPED> symbol — MCR Operations 4-9
Mapping
  APR0 — Executive 3-19
  concept — Task Builder 2-22
  DCL to MCR — System Management 12-20 to 12-25, 12-34
  I/O page — Executive 3-19
  privileged tasks — Executive 3-19

Mapping (Cont.)
  task — Task Builder 2-15
Mapping context — Executive 5-86
Mapping pointer
  file window
    allocating — MCR Operations 3-74, 3-84, 3-127
Mapping register assignment block
  allocating — Writing I/O Driver B-2
  figure — Writing I/O Driver B-3
.MARK — I/O Operations 4-18 to 4-19
Mark Time directive — Executive 5-103
Mark time request — Crash Dump Analyzer 3-50
Mark-for-deletion
  See FB$MKD mask in FOP field
Mask register — ODT 2-6, 5-3
Mask symbol
  See Code and mask symbol
Mass insertion — RMS-11 User's Guide 2-18, 6-28, 7-9
  See also RB$MAS mask in ROP field
  populating indexed files — RMS-11 User's Guide 6-29
  RMSCNV utility — RMS-11 Utilities 4-10
Mass-storage device — Introduction 1-13, 3-2, 3-8, 5-6, 5-11, Gloss-21; RMS-11 Introduction 2-1
  errors — Error Logging 1-1
Master command table
  DCL — System Management 12-6 to 12-12, 12-17 to 12-20, 12-46 to 12-47
Master File Directory — I/O Operations 5-2
  See also MFD
Master File Directory Header — I/O Operations E-2
Match criterion — RMS-11 Introduction 3-12
  See also RB$KGE mask in ROP field
  See also RB$KGT mask in ROP field
  random access — RMS-11 User's Guide 5-13
MAXBUF option — Task Builder 11-23
/MAXEXT keyword
  SET command — MCR Operations 3-187
    VMR — System Management 10-53
/MAXIMUM qualifier
  BRU utility — Utilities 7-18
Maximum record number
  See also MRN
  RMSDEF utility — RMS-11 Utilities A-9
Maximum record size
  RMSDEF utility — RMS-11 Utilities A-9
/MAXPKT keyword
  SET command — MCR Operations 3-188
/MB switch
  CMP utility — Utilities 12-3
MBC — RMS-11 User's Guide 2-17
  sequential files — RMS-11 User's Guide 3-15
MBC field in RAB
  CONNECT operation — RMS-11 Macros 5-6
  offset — RMS-11 Macros 6-115
  summary — RMS-11 Macros 6-125
MBF field in RAB
  CONNECT operation — RMS-11 Macros 5-6
  offset — RMS-11 Macros 6-115
  summary — RMS-11 Macros 6-126
.MBLUN
  reserved global symbol — Task Builder E-1
MC command
  EDI editor — Utilities 2-37

/MC switch
  Indirect — MCR Operations 4-19
MC symbolic argument — PDP-11 MACRO-11 6-11
.MCALL assembler directive — RMS-11 Macros 2-2
.MCALL directive — PDP-11 MACRO-11 7-20; Program Development 1-10, 2-6 to 2-7, 3-3; I/O Drivers 1-17
  using with user macro library — Program Development 6-3 to 6-4
MCL symbolic argument — PDP-11 MACRO-11 6-20
MCR — EDT Editor 2-2; Introduction 1-5, 1-8, 4-1, Gloss-21; Command Language 1-1 to 1-2, B-1; Program Development 1-1 to 1-3; System Management 7-1, 7-12 to 7-13, 11-1 to 11-2, 11-5, 12-1, 12-20 to 12-25, 12-34
  CLI default — System Management 2-3
  command
    summary — MCR Operations 1-5
    testing in UETP — System Management 9-3
  command line — EDT Editor 4-4
  creating saved answer file — System Generation (11M) 3-11
  inhibit execution
    Phase I — System Generation (11M) 4-4
    Phase II — System Generation (11M) 5-4
    PREPGEN — System Generation (11M) 3-11
  interface — MCR Operations 1-5
  linking
    debugger — ODT 8-1
    ODT — ODT 1-2
    ODTID — ODT 1-3
    supervisor libraries — ODT 1-4
  mapping to DCL — System Management 12-20 to 12-25, 12-34
  mode — MCR Operations 4-32
  multiuser
    correction to on unmapped system — Release Notes 1-35
  relationship with VMR — System Management 10-1
  source module
    updating — Release Notes 1-42
  terminal
    specifying — MCR Operations 3-189
  using
    suppress messages from QMG — Release Notes 1-36
MCR command — Command Language 1-7, 9-25
MCR dispatching algorithm — Executive 5-5
/MCR keyword
  HELP command — MCR Operations 3-66
  SET command — MCR Operations 3-189
MCR Operations Manual
  note to — Release Notes 1-48
  technical changes — Release Notes 1-6
MCR qualifier — EDT Editor 4-6
MCR RUN support — System Generation (11M) 4-29
MCR SSM command
  See SSM command
MCR unit control block — Crash Dump Analyzer 3-26
/MD switch
  DMP utility — Utilities 11-7
MD symbolic argument — PDP-11 MACRO-11 6-11
.MDELETE directive — PDP-11 MACRO-11 7-21
/ME switch
  PIP utility — Utilities 3-9, 3-28
ME symbolic argument — PDP-11 MACRO-11 6-11

MEB symbolic argument — PDP-11 MACRO-11 6-11
Medium — Introduction 5-11 to 5-12, Gloss-21
  and I/O time — RMS-11 User's Guide 2-3
  and record formats and file organizations — RMS-11 User's Guide 1-20
  and variable-length format — RMS-11 User's Guide 2-15
  disk — RMS-11 User's Guide 1-18
    file specification — RMS-11 User's Guide A-1
    retrieval pointers — RMS-11 User's Guide 8-11
    usage — RMS-11 User's Guide 8-13
  magtape — RMS-11 User's Guide 1-18
    file specification — RMS-11 User's Guide A-4 to A-5
  placement control — RMS-11 User's Guide 6-13
  sequential files — RMS-11 User's Guide 3-3
  unit-record device — RMS-11 User's Guide 1-18, A-1
Member Number Identification
  definition — System Management B-2
Memory — Introduction 5-4, 5-6, 5-9, Gloss-21
  accessing — MCR Operations 3-137
  allocation file
    See Map file
  available
    displaying — System Generation (11S) 2-22
  cache — System Generation (11M) 4-16
  compacting space
    See SHF
  display
    See RMD
  dump — Task Builder D-1
  fill command — ODT 2-9, 6-4
  image — Task Builder 2-8 to 2-9
  layout
    unmapped system — Task Builder 2-16
  limit register — ODT 2-6, 5-3, 6-1
  list command — ODT 2-9, 6-4
  listing format — ODT 6-5
  management
    PLAS directives — System Generation (11M) 4-24
    specifying for target system — Task Builder 10-27
  maximum size of — System Management 10-41
  parity support — System Generation (11M) 4-15
  physical
    disk-resident overlay — Task Builder 3-3 to 3-4
    memory-resident overlay — Task Builder 3-6
    overlay — Task Builder 3-5, 3-32 to 3-34
  processor memory size — System Generation (11M) 4-11
  reducing to build a task — Task Builder F-4
  reducing usage of — Task Builder 3-1
  requirement — System Generation (11S) 1-3
  resident overlay structure — Task Builder 3-6
  saving — System Generation (11S) 2-17
    maximum size — System Generation (11S) 2-16
      determining — System Generation (11S) 2-17
    overlaid task — Task Builder 3-9 to 3-10
    restriction — System Generation (11S) 2-17
  search — ODT 6-3
  search command — ODT 2-8, 2-10 to 2-11
Memory allocation — PDP-11 MACRO-11 6-46
Memory allocation file
  See Map
Memory errors — Error Logging 1-1
  error logging — Error Logging 1-6

Memory management — System Library 7-1; Executive 3-1 to 3-3, 3-11
  See also Virtual memory management
  core blocks release ($RLCB) — System Library 7-4
  core blocks request ($RQCB) — System Library 7-3
  directives — Executive 3-8 to 3-10
  fixing tasks
    on RSX-11S — Release Notes 3-1
  initialize ($INIDM) — System Library 7-2
  use by task — Task Builder 2-15 to 2-16
Memory Management Unit — Task Builder 2-14
Memory word — Introduction Gloss-36
Memory-resident
  .overlay
    loading — Task Builder 4-1
  overlay — Task Builder 3-1; RMS-11 User's Guide 1-13, 8-3, 8-6
  task — Introduction 5-7, 5-9, Gloss-2
/MEMSIZ — Crash Dump Analyzer 2-6
<MEMSIZ> symbol — MCR Operations 4-11
MERGE
  See CONVERT command
Merged string — RMS-11 Macros 3-3
Merging file
  PIP utility — Utilities 3-9
/MESSAGE
  keyword
    CLI command — MCR Operations 3-39
  subkeyword
    CLI command — MCR Operations 3-38
Message
  Basic MCR — System Generation (11S) 2-4
  diagnostic
    eliminating — Task Builder 10-30
  error — Command Language A-1; Task Builder H-1
    virtual memory system — Task Builder F-5
  Indirect — MCR Operations 4-57
  inhibiting system queuing of — Task Builder 10-35
  invocation — ODT 1-4
  MCR — MCR Operations A-1
  MCR command
    ABORT — MCR Operations 3-4
    ACS — MCR Operations 3-9
    ALLOCATE — MCR Operations 3-13
    ASSIGN — MCR Operations 3-18
    BOOT — MCR Operations 3-25
    BROADCAST — MCR Operations 3-30
    BYE — MCR Operations 3-32
    CLI — MCR Operations 3-40
    DISMOUNT — MCR Operations 3-51
    FIX — MCR Operations 3-54
    FLA — MCR Operations 3-56
    HELLO — MCR Operations 3-62
    HELP — MCR Operations 3-69
    HOME — MCR Operations 3-75
    INI — MCR Operations 3-85
    INSTALL — MCR Operations 3-98
    LOAD — MCR Operations 3-107
    LOGIN — MCR Operations 3-62
    LUN — MCR Operations 3-113
    MOUNT — MCR Operations 3-128
    OPEN — MCR Operations 3-138
    REASSIGN — MCR Operations 3-143
    REDIRECT — MCR Operations 3-144

Message
  MCR command (Cont.)
    REMOVE — MCR Operations 3-146
    RESUME — MCR Operations 3-147
    RUN — MCR Operations 3-156
    SAVE — MCR Operations 3-160
    SET — MCR Operations 3-209
    TAS — MCR Operations 3-216
    UFD — MCR Operations 3-220
    UNFIX — MCR Operations 3-222
    UNLOAD — MCR Operations 3-223
  OTL — System Generation (11S) 2-10
  recording
    by Console Logger — System Management 3-2
  RMSBCK utility — RMS-11 Utilities C-1
  RMSCNV utility — RMS-11 Utilities C-1
  RMSDEF utility — RMS-11 Utilities A-20
  RMSDES utility — RMS-11 Utilities 2-52
  RMSDSP utility — RMS-11 Utilities C-1
  RMSIFL utility — RMS-11 Utilities C-1
  RMSRST utility — RMS-11 Utilities C-1
  sending — MCR Operations 3-27
    time limit — MCR Operations 3-27
  SIP — System Generation (11S) 2-17
  size for console output — System Management 3-2
  summary — System Generation (11S) A-1
  time-stamping
    by Console Logger — System Management 3-2
  TKTN — System Generation (11S) 2-19; MCR Operations 3-5, A-1
  VMR — System Management 10-76
Message formatting — System Library 6-1
  ASCII string — System Library 6-7
  carriage return/line feed insertion — System Library 6-9
  date conversion ($DAT) — System Library 6-2
  edit directive ($EDMSG) — System Library 6-5
  extended ASCII — System Library 6-8
  field mark — System Library 6-12
  file name string — System Library 6-11
  form feed insertion — System Library 6-8
  general — System Library 6-5
  space insertion — System Library 6-10
    length of — System Library 6-12
  time conversion ($TIM) — System Library 6-3
  upper case text ($CVTUC) — System Library 6-1
MESSAGE statement — Error Logging 5-41
Message-oriented communication
  device-specific QIO — I/O Drivers 12-5 to 12-7
  driver — I/O Drivers 12-1
  full-duplex — I/O Drivers 12-11
  half-duplex — I/O Drivers 12-11
  redundancy checking — I/O Drivers 12-11
  standard QIO — I/O Drivers 12-5
  status return — I/O Drivers 12-8 to 12-10
  transmission validation — I/O Drivers 12-11
Messages
  ERLCFL — Error Logging 5-44
Metalanguage — System Management 12-12
  general description — System Management 12-13 to 12-15
.MEXIT directive — PDP-11 MACRO-11 7-3
MFD — Introduction 5-12, Gloss-11, Gloss-21; Command Language 4-1, 5-11, 5-65; MCR Operations 2-2
  contents — MCR Operations 2-2

/MH switch
  LBR utility — Utilities 10-22
Mini-Reference
  technical changes — Release Notes 1-20
Minus operator — PDP-11 MACRO-11 3-4
Minus sign (-) command
  EDT — Introduction 2-13 to 2-14
Minus sign (-) operator — ODT 2-3 to 2-4
Misplaced word
  correcting with DEL W and UND W — EDT Editor 5-29
Mistake
  correcting after COMMAND:
      prompt — EDT Editor 5-47
  typing — Introduction 1-8 to 1-9
Mixed MASSBUS configuration — Error Logging 4-33
/ML assembler switch — RMS-11 Macros 2-20
/ML switch — PDP-11 MACRO-11 8-6 to 8-7
  RMSCNV utility — RMS-11 Utilities 4-11
ML-11 — I/O Drivers 5-4
.MLB file type — Program Development 6-1
/MM switch — Task Builder 10-27
MML — System Management 12-5 to 12-6, 12-9, 12-15 to 12-17
  AND macro — System Management 12-25 to 12-26
  BC macro — System Management 12-26
  BCT macro — System Management 12-27
  BS macro — System Management 12-26
  BST macro — System Management 12-27 to 12-28
  CBM macro — System Management 12-28
  CCBM macro — System Management 12-28
  COP macro — System Management 12-29
  DIR macro — System Management 12-30
  DMAP macro — System Management 12-31 to 12-34
  ERR macro — System Management 12-30
  HLP macro — System Management 12-31
  MAP macro — System Management 12-31 to 12-34
  NO macro — System Management 12-35
  OCOP macro — System Management 12-29
  OPT macro — System Management 12-35 to 12-36
  OPTR macro — System Management 12-35 to 12-36
  predefined syntax elements — System Management 12-39 to 12-45
  PRO macro — System Management 12-36 to 12-37
  QUA macro — System Management 12-37 to 12-38
  TST macro — System Management 12-39
Mnemonic — Introduction Gloss-21
Mode
  See also Access mode
  See also Address mode
  See also Record transfer mode
  change
    EDT — Introduction 2-3, 2-17, Gloss-6
  compatibility
    in a task — Task Builder 10-8
  Indirect operating
    disabling — MCR Operations 4-31
    enabling — MCR Operations 4-32
    initial setting — MCR Operations 4-32
    list — MCR Operations 4-32
    testing — MCR Operations 4-40
  line
    EDT — Introduction 2-4, Gloss-19
Modem — I/O Drivers 2-42, 3-32
Modify option
  ACNT — System Management 2-5 to 2-6
Modifying
  commands
    DCL — System Management 12-12

Modularity
  program — PDP-11 MACRO-11 6-43
Module
  extracting from library — Task Builder 10-23
  linking — Task Builder 2-3
  name — Task Builder A-4
  name entry format — Task Builder A-4
  object
    extracting by name — Task Builder F-4
    linking — Task Builder 2-1
    patching — Release Notes 1-47
  placing in segment
    reducing overhead — Task Builder F-4
  record
    end of — Task Builder A-24
  source
    DCL
      updating — Release Notes 1-46
    Executive
      updating — Release Notes 1-40
    MCR
      updating — Release Notes 1-42
Module name — Program Development 2-3, 2-5, 6-5 to 6-7
  table — Program Development 6-9 to 6-10
    macro library — Program Development 6-2 to 6-3
    object library — Program Development 6-5, 6-7
MODULE statement — Error Logging 5-32
Module version — Program Development 2-5
.MOLUN
  reserved global symbol — Task Builder E-1
Monitor — Introduction Gloss-22
  level — Introduction 2-2, 3-7
Monitor Console Routine
  See MCR
MOU command — MCR Operations 3-114
/MOU keyword
  SAVE command — MCR Operations 3-160
MOUNT command — Command Language 5-4, 5-9, 5-12 to 5-13, 5-26 to 5-42, 9-27 to 9-28
  — MCR Operations 3-114
  command line format
    ANSI magtape — MCR Operations 3-116
    Files-11 — MCR Operations 3-115
  error message — MCR Operations 3-128
  example — MCR Operations 3-127
  keyword
    /ACP — MCR Operations 3-118
    ANSI magtape — MCR Operations 3-118
    /BS — MCR Operations 3-119
    /CC — MCR Operations 3-119
    /DENS — MCR Operations 3-119
    /EXT — MCR Operations 3-119
    Files-11 — MCR Operations 3-116
    /FOR — MCR Operations 3-120
    /FPRO — MCR Operations 3-120
    /HDR3 — MCR Operations 3-120
    /LABEL — MCR Operations 3-121
    /LOCK — MCR Operations 3-121
    /LRU — MCR Operations 3-121
    /OVR — MCR Operations 3-122
    /OVRACC — MCR Operations 3-122
    /OVREXP — MCR Operations 3-122
    /OVRSFID — MCR Operations 3-122
    /PARM — MCR Operations 3-123

MOUNT command
  keyword (Cont.)
    /PRO — MCR Operations 3-123
    /PUB — MCR Operations 3-123
    /RS — MCR Operations 3-123
    /SHARE — MCR Operations 3-124
    /TR — MCR Operations 3-124
    /UIC — MCR Operations 3-124
    /UNL — MCR Operations 3-125
    /VI — MCR Operations 3-125
    /VOL — MCR Operations 3-126
    /WAIT — MCR Operations 3-126
    /WIN — MCR Operations 3-127
    /WRITE — MCR Operations 3-127
  supported device — MCR Operations 3-114
/MOUNTED qualifier
  BRU utility — Utilities 7-18
Mounted volume — Command Language 5-9, 5-13
MOVE command — EDT Editor 2-35, 7-11
  EDT — Introduction 2-10 to 2-11
Move mode — I/O Operations 1-6; RMS-11 Introduction 4-6
  GET$ — I/O Operations 3-18
  GET$ operations — I/O Operations 3-21
  indexed files — RMS-11 User's Guide 7-7
  PUT$ — I/O Operations 3-26
  relative files — RMS-11 User's Guide 4-12
  sequential files — RMS-11 User's Guide 3-13
Moving
  text
    EDT — Introduction 2-11
Moving the cursor
  keypad editing — EDT Editor 2-9, 5-12 to 5-21
  nokeypad editing — EDT Editor 2-37, 8-13
/MP switch — Task Builder 10-28
$MPUB1 routine — Writing I/O Driver 5-20, B-3
  use of
    to obtain UMRs — Writing I/O Driver B-1
$MPUBM routine — Writing I/O Driver 5-19, B-3
  use of
    to obtain UMRs — Writing I/O Driver B-1
.MRKDL — I/O Operations 4-23
$$MRKS
  PSECT — Task Builder 5-52
  reserved PSECT name — Task Builder E-3
MRKT$ — Executive 5-103
MRL field in KEY block
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-68
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-85
MRN — RMS-11 User's Guide 1-19
  relative files — RMS-11 User's Guide 4-4 to 4-5
MRN field in FAB
  CREATE operation — RMS-11 Macros 5-13
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-79
  summary — RMS-11 Macros 6-55
MRS field in FAB
  CREATE operation — RMS-11 Macros 5-12
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-79
  summary — RMS-11 Macros 6-56
MSCP disk
  RCT
    address space — System Management 5-2
    bad block handling — System Management 5-3

MSCP60 Error Logging 4-9
MSCP80 Error Logging 4-9
MSCPAT Error Logging 4-9
MSCPE Error Logging 4-9
MSCPEN Error Logging 4-9
MSCPSD Error Logging 4-9
MSCPTO Error Logging 4-9
MTAACP Command Language 5-34, 5-38 to 5-40
MTADF$ Crash Dump Analyzer B-27
$MUL (Integer multiply) System Library 3-1
Multi-line input Task Builder 1-3
Multiblock count
  See MBC
  See MBC field in RAB
Multibuffer count
  See MBF field in RAB
Multicontroller driver Writing I/O Driver 2-10
  conditional code description Writing I/O Driver 4-33
  conditional code example Writing I/O Driver 4-34
Multidirectory device
  See FB$MDI mask in DEV field
Multiple
  buffer EDT Editor 1-8, 2-32
  file EDT Editor 1-8, 2-32
Multiple access streams
  and shared access RMS-11 User's Guide 2-9 to 2-10
  I/O techniques RMS-11 User's Guide 2-17
  indexed files RMS-11 User's Guide 7-10
  relative files RMS-11 User's Guide 4-15
  sequential files RMS-11 User's Guide 3-15
Multiple areas
  RMSDES utility RMS-11 Utilities 2-7, 2-43
Multiple buffer count
  parameter to FDBF$A I/O Operations 2-18
  parameter to FSRSZ$ I/O Operations 2-38
Multiple buffering I/O Operations 1-6, 3-10
  effect on FSRSZ$ I/O Operations 2-37
  read-ahead I/O Operations 1-7, 2-18
  type of I/O Operations 2-18
  versus single buffering I/O Operations 1-7
  write-behind I/O Operations 2-19
Multiple buffers RMS-11 User's Guide 2-18
  indexed files RMS-11 User's Guide 7-9
  relative files RMS-11 User's Guide 4-15
  sequential files RMS-11 User's Guide 3-14
Multiple definition error
  See M error
Multiple expression PDP-11 MACRO-11 2-4
Multiple keys
  RMSDES utility RMS-11 Utilities 2-7, 2-38
Multiple label PDP-11 MACRO-11 2-2
Multiple symbol PDP-11 MACRO-11 2-4
Multiple-buffered record I/O I/O Operations 3-10
Multiple-tree
  example Task Builder 3-31
  structure Task Builder 3-30 to 3-31
    defining a Task Builder 3-30 to 3-31
Multiplexer
  asynchronous serial line I/O Drivers 2-40, 3-29 to 3-30
  Q BUS I/O Drivers 2-40
Multiplication operator PDP-11 MACRO-11 3-2, 3-5
Multiply routine
  double-precision multiply ($DMUL) System Library 3-3
  multiply ($MUL) System Library 3-1
Multiprogramming Introduction 5-8, Gloss-22

Multisegment task
  See Overlay
Multiuser — Introduction Gloss-22
  protection — System Generation (11M) 4-26
  system
    tailoring — System Generation (11M) 6-8, 6-18
Multiuser system — Introduction 5-1
Multiuser task — Command Language 6-73
MUNG qualifier
  EDIT command — Command Language 4-20 to 4-22, 9-16

/MXF keyword
  HOME command — MCR Operations 3-73
  INI command — MCR Operations 3-82

N

N command — ODT 2-10, 6-3
N error — PDP-11 MACRO-11 3-15
  summary — PDP-11 MACRO-11 D-4
n symbol — ODT 2-1 to 2-2
N$$UMR symbol — Writing I/O Driver B-4
N$-family macro — RMS-11 Macros 2-9
  declaring — RMS-11 Macros C-2
  example — RMS-11 Macros 7-3, 7-7, 7-11, 7-15

N.OVPT
  low-memory context — Task Builder B-10
  reserved global symbol — Task Builder E-1
N.STAT — I/O Operations 4-11, B-3 to B-4
  wildcard .FIND operations — I/O Operations 4-13
NAM block — RMS-11 Introduction 4-8
  chaining to FAB — RMS-11 Macros 2-12
  declaring — RMS-11 Macros 2-8
  file specification — RMS-11 User's Guide A-6
  identification by
    See FB$FID mask in FOP field
  initializing — RMS-11 Macros 2-9
  summary — RMS-11 Macros 6-94
NAM field in FAB
  chaining NAM block to FAB — RMS-11 Macros 2-12
  CREATE operation — RMS-11 Macros 5-9
  ENTER operation — RMS-11 Macros 5-35
  ERASE operation — RMS-11 Macros 5-40
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-72
  PARSE operation — RMS-11 Macros 5-86
  REMOVE operation — RMS-11 Macros 5-102
  RENAME operation — RMS-11 Macros 5-108
  SEARCH operation — RMS-11 Macros 5-116
  summary — RMS-11 Macros 6-57
NAM$B macro — RMS-11 Macros 2-8, C-2
  example — RMS-11 Macros 7-3, 7-7, 7-11, 7-15

NAM$E macro — RMS-11 Macros 2-9
  declaring — RMS-11 Macros C-2
  example — RMS-11 Macros 7-3, 7-7, 7-11, 7-15

NAME
  RMSDES utility
    file section — RMS-11 Utilities 2-31
    key section — RMS-11 Utilities 2-38
Name
  file — RMS-11 User's Guide A-2
    default — RMS-11 User's Guide A-6
  global symbol — Task Builder A-6

.NAME directive Task Builder 3-26
  attribute
    DSK Task Builder 3-27
    GBL Task Builder 3-27
    NODSK Task Builder 3-27
    NOGBL Task Builder 3-27
  example of use of Task Builder 3-27
/NAME keyword
  HOME command MCR Operations 3-73
/NAME qualifier
  SHOW QUEUE command Batch and Queue 2-16
/NAME:jobname qualifier
  PRINT command Batch and Queue 2-4
Named variable Error Logging 5-8
NAMOF$ macro RMS-11 Macros C-2
.NARG directive PDP-11 MACRO-11 7-11
  example PDP-11 MACRO-11 7-12
NB condition test argument PDP-11 MACRO-11 6-52
NB$-family symbol
  declaring RMS-11 Macros C-2
NB$DEV mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111
  value RMS-11 Macros 6-94
NB$DIR mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111
  value RMS-11 Macros 6-94
NB$NAM mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation
    (set if NB$QUO is set) RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111
  value RMS-11 Macros 6-94
NB$NOD mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111
  value RMS-11 Macros 6-94
NB$QUO mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111
  value RMS-11 Macros 6-94

NB$TYP mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation
    (set if NB$QUO is set) RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111
  value RMS-11 Macros 6-94
NB$VER mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111
  value RMS-11 Macros 6-94
NB$VER mask in FNB field of NAM
  RSX-11 RMS-11 Macros D-3 to D-4
NB$WCH mask in FNB field RMS-11 Macros 3-9 to 3-10
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-38
  ERASE operation RMS-11 Macros 5-41, 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-103, 5-105
  RENAME operation RMS-11 Macros 5-109, 5-112
  SEARCH operation RMS-11 Macros 5-116, 5-118
  summary RMS-11 Macros 6-102
  value RMS-11 Macros 6-94
  wildcard loop RMS-11 Macros 3-10
NB$WDI mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111
  value RMS-11 Macros 6-94
NB$WNA mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111
  value RMS-11 Macros 6-94
NB$WTY mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-111
  value RMS-11 Macros 6-94
NB$WVE mask in FNB field
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-37
  ERASE operation RMS-11 Macros 5-43
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-88
  REMOVE operation RMS-11 Macros 5-105

NB$WVE mask in FNB field (Cont.)
  RENAME operation — RMS-11 Macros 5-111
  value — RMS-11 Macros 6-94
NB.ANS
  bit in N.STAT — I/O Operations 4-15
.NCHR directive — PDP-11 MACRO-11 7-13
NDF condition test argument — PDP-11 MACRO-11 6-52
NE condition test argument — PDP-11 MACRO-11 6-51
Negative offset — ODT 7-2
Nested conditional assembly
    directive — PDP-11 MACRO-11 6-52
Nesting
  macro definition — PDP-11 MACRO-11 7-5 to 7-6
<NETNOD> symbol — MCR Operations 4-14
/NETUIC keyword
  SET command — MCR Operations 3-189
    VMR — System Management 10-53
Network facilities
  RMSCNV utility — RMS-11 Utilities 4-1
$NEW
  predefined syntax element in
      MML — System Management 12-44
/NEW_VERSION qualifier
  BRU utility — Utilities 7-19
NEXT & PRINT command
  EDI editor — Utilities 2-16, 2-39
NEXT command
  EDI editor — Utilities 2-16, 2-39
Next sequential location — ODT 4-4
Next-record context — RMS-11 Macros 4-3
  See also Context
$NFIL
  predefined syntax element in
      MML — System Management 12-41
$NFILE
  predefined syntax element in
      MML — System Management 12-41
NFS
  exercise
    example of — System Management 4-14
  testing
    range of blocks — System Management 4-50
  volume
    altering range of test blocks — System Management 4-50
    displaying range of test
        blocks — System Management 4-50
    error retries — System Management 4-54
    selecting with SELECT — System Management 4-56
    selecting with VERIFY — System Management 4-62
/NL switch — PDP-11 MACRO-11 8-6
NL:
  pseudo device — Command Language 5-6
.NLIST BEX directive — Program Development 2-6
.NLIST directive — PDP-11 MACRO-11 6-9 to 6-14
  arguments for — PDP-11 MACRO-11 6-10 to 6-12
.NLUNS
  reserved global symbol — Task Builder E-1
/NM switch — Task Builder 10-30
  PIP utility — Utilities 3-28
NMBLK$
  general method of specifying — I/O Operations 2-32
  macro call — I/O Operations 2-30
  parameters — I/O Operations 2-31
NMBLK$ macro — I/O Operations 3-15
NML11 — Error Logging 4-9
No limit switch — Error Logging 2-3, 2-6
No log switch — Error Logging 2-3

NO macro
  MML — System Management 12-35
NO SCROLL key — Command Language 3-14
  VT100 — Introduction 1-17
No sharing
  sharing declaration — RMS-11 User's Guide 2-7
No spool switch — Crash Dump Analyzer 2-8
No-op I/O function mask — Writing I/O Driver 4-12
/[NO]CV switch
  RMSRST utility — RMS-11 Utilities 7-5, 7-10
/[NO]QU switch
  RMSBCK utility — RMS-11 Utilities 6-5 to 6-7, 6-10
  RMSRST utility — RMS-11 Utilities 7-6 to 7-8, 7-12
NOA field in SUM block
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-145
  OPEN operation — RMS-11 Macros 5-81
  summary — RMS-11 Macros 6-148
NOCOMMAND qualifier
  DCL — EDT Editor 4-3
  MCR — EDT Editor 4-6
.NOCROSS directive — PDP-11 MACRO-11 6-21 to 6-22
$NOD
  predefined syntax element in MML — System Management 12-41
$NODE
  predefined syntax element in MML — System Management 12-41
Node
  remote file specification — RMS-11 User's Guide B-2
/NOER switch
  RMSIFL utility — RMS-11 Utilities 3-6
/NOINITIALIZE qualifier
  BRU utility — Utilities 7-19
NOJOURNAL qualifier
  DCL — EDT Editor 4-4
  example — EDT Editor 3-5
  MCR — EDT Editor 4-6
NOK field in SUM block
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-145
  OPEN operation — RMS-11 Macros 5-81
  summary — RMS-11 Macros 6-149
Nokeypad command
  ADV — EDT Editor 8-5
  APPEND — EDT Editor 8-5
  ASC — EDT Editor 8-5
  BACK — EDT Editor 8-6
  CHGC — EDT Editor 8-6
  circumflex (^) — EDT Editor 8-25
  CUT — EDT Editor 2-43, 8-7
  D — EDT Editor 2-40, 8-9
  DEFK — EDT Editor 8-10, 10-1
  EX — EDT Editor 8-10
  EXT — EDT Editor 8-10
  FILL — EDT Editor 8-11
  I — EDT Editor 2-40, 8-12
  Null — EDT Editor 8-13
  PASTE — EDT Editor 2-43, 8-15
  QUIT — EDT Editor 8-15
  R — EDT Editor 8-15
  REF — EDT Editor 8-16
  S — EDT Editor 2-42, 8-16
  SEL — EDT Editor 8-17
  SHL — EDT Editor 8-18
  SHR — EDT Editor 8-18
  SN — EDT Editor 8-19

Nokeypad command (Cont.)
  TAB EDT Editor 8-21
  TADJ EDT Editor 8-22
  TC EDT Editor 8-23
  TD EDT Editor 8-24
  TI EDT Editor 8-24
  TOP EDT Editor 8-24
  UNDC EDT Editor 8-24
  UNDL EDT Editor 8-25
  UNDW EDT Editor 2-41, 8-24
Nokeypad editing
  buffer definition EDT Editor 8-4
  command definition EDT Editor 8-4
  command format EDT Editor 2-37
  copying text EDT Editor 8-15
  count definition EDT Editor 8-4
  CTRL/Z and I EDT Editor 2-40
  cursor movement EDT Editor 2-37, 2-39, 8-2
  defining entity EDT Editor 2-39
  deleting entity EDT Editor 8-9
  deleting text EDT Editor 8-15
  description EDT Editor 1-7, 2-36
  direction definition EDT Editor 8-4
  ending a session EDT Editor 8-10
  entity EDT Editor 8-2 to 8-4
  format EDT Editor 8-4
  how to enter EDT Editor 2-37
  inserting character EDT Editor 2-40
  inserting text EDT Editor 8-12
  moving text into buffers EDT Editor 8-7
  returning to line editing EDT Editor 2-44
  reverse search EDT Editor 2-42, 8-6
  search ('string') EDT Editor 8-4
  shortening a file EDT Editor 2-39
  starting EDT Editor 2-36, 7-2, 8-1
  substituting text EDT Editor 2-42
  undeleting character EDT Editor 8-24
  undeleting text EDT Editor 8-25
  use of command EDT Editor 1-10
  using EDT Editor 2-37
  using CTRL/Z with I EDT Editor 8-13
/NOLIM switch Error Logging 2-3, 2-6
/NOLO job switch
  QUE /MOD command Batch and Queue 2-21
/NOLOG switch Error Logging 2-3
/NOLOW switch
  PRI command Batch and Queue 2-4
Non-RMS-11 files RMS-11 Introduction 3-4
Noncontiguous range EDT Editor 6-11
Nonfile-structured exercising
  IOX System Management 4-3
Nonoverlaid routine RMS-11 User's Guide 1-13, 8-2, 8-8 to 8-9
Nonprivileged task
  directive restrictions Executive 1-12 to 1-13
Nonprivileged user Introduction 5-5, Gloss-25
Nonsense interrupt logging Error Logging 4-22
NOOUTPUT qualifier (DCL) EDT Editor 4-3
/NOPRESERVE qualifier
  BRU utility Utilities 7-19
Noread Only qualifier
  NOREAD_ONLY (DCL) EDT Editor 4-4
  -RO (MCR) EDT Editor 4-7
NORECOVER qualifier
  DCL EDT Editor 4-4
  MCR EDT Editor 4-6
NOSAV symbolic argument PDP-11 MACRO-11 6-42

/NOSO switch
  RMSIFL utility — RMS-11 Utilities 3-8 to 3-10
/NOSP switch — PDP-11 MACRO-11 8-7
/NOSUPERSEDE qualifier
  BRU utility — Utilities 7-19
Notes module
  exit — Error Logging 4-33
  heading — Error Logging 4-32
  MODULE statement — Error Logging 4-32
  NML11 — Error Logging 4-9
  note name — Error Logging 4-32
  NRK67 — Error Logging 4-9
  NRM05 — Error Logging 4-9
  NRM23 — Error Logging 4-9
  NT0310 — Error Logging 4-9
  NTS11 — Error Logging 4-9
  print declaration — Error Logging 4-32
  print number — Error Logging 4-33
  PROCEDURE statement — Error Logging 4-32
  unknown note — Error Logging 4-33
  user written — Error Logging 4-31
NOTYPE qualifier — EDT Editor 7-17
/NOVERIFY switch
  FMT utility — Utilities 5-8
.NOVLY
  reserved global symbol — Task Builder E-1
/NOWCHK switch
  BAD utility — Utilities 6-9
NOWIDE argument — PDP-11 MACRO-11 8-11 to 8-12
NP command
  EDI editor — Utilities 2-16, 2-39
NPR device driver — Writing I/O Driver B-1
  use of SCB field S.MPR — Writing I/O Driver 4-23
NRK67 — Error Logging 4-9
NRM05 — Error Logging 4-9
NRM23 — Error Logging 4-9
/NS switch
  SLP utility — Utilities 13-16
NSG field in KEY block
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-68
  OPEN operation — RMS-11 Macros 5-81
  summary — RMS-11 Macros 6-86
$NSIER — Error Logging 4-22
.NSTBL
  reserved global symbol — Task Builder E-1
NT0310 — Error Logging 4-9
NTS11 — Error Logging 4-9
.NTYPE directive — PDP-11 MACRO-11 7-14
/NU switch
  FLX utility — Utilities 4-7
NUL field in KEY block
  CREATE operation — RMS-11 Macros 5-19
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-67
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-87
$NULL
  predefined syntax element in MML — System Management 12-45
Null
  root — Task Builder 3-30
    in ODL — Task Builder 3-30
  segment
    in ODL — Task Builder 3-30
NULL command (Implied TYPE)
  line editing — EDT Editor 2-23, 7-12

NULL command (Implied TYPE)
(Cont.)
nokeypad editing — EDT Editor 8-13
Null device — I/O Drivers 19-1
driver — I/O Drivers 19-1
Null key — RMS-11 Introduction 3-10
RMS-11 User's Guide 6-10
See also NUL field in KEY block
See also XB$NUL mask in FLG field
/NULL subkeyword
CLI command — MCR Operations 3-38
NULL_KEY
RMSDES utility — RMS-11 Utilities 2-39
NULL_VALUE
RMSDES utility — RMS-11 Utilities 2-39
$NUM
predefined syntax element in MML — System Management 12-39
Number
displayed in line editing — EDT Editor 6-1
fixed line — EDT Editor 1-7, 6-4
floating-point — PDP-11 MACRO-11 6-33 to 6-34
line — EDT Editor 6-1
MACRO-11 treatment — PDP-11 MACRO-11 3-14
one's complement — PDP-11 MACRO-11 6-35 to 6-36
one-word floating-point — PDP-11 MACRO-11 6-35 to 6-36
packing decimal — PDP-11 MACRO-11 6-31
radix control — PDP-11 MACRO-11 6-31 to 6-32
resequencing of line — EDT Editor 6-3
two's complement operator — PDP-11 MACRO-11 3-4
version
file — Command Language 4-3
Number of arguments
See .NARG directive
Number sign (#) — Command Language 3-16
in cross-reference listing — Task Builder 10-12 to 10-13
<NUMBER> symbol — MCR Operations 4-9
Numbering system — Introduction 3-2
Numeric control
operator — PDP-11 MACRO-11 6-33
temporary operator — PDP-11 MACRO-11 6-35 to 6-36
Numeric conversion function — Error Logging 5-17 to 5-18
Numeric directive — PDP-11 MACRO-11 6-33
Numeric symbol — MCR Operations 4-7, 4-14
decrementing — MCR Operations 4-30
defining — MCR Operations 4-49
incrementing — MCR Operations 4-42
radix of — MCR Operations 4-15
redefining — MCR Operations 4-49
substituting — MCR Operations 4-15
testing — MCR Operations 4-39
Numeric to ASCII — System Library 5-1
See also ASCII number conversion
binary byte to octal ($CBTMG) — System Library 5-9
binary date to decimal ($CBDAT) — System Library 5-2
binary to signed decimal ($CBDSG) — System Library 5-4
binary to signed octal ($CBOSG) — System Library 5-8
binary to unsigned decimal ($CBDMG) — System Library 5-3
binary to unsigned octal ($CBOMG) — System Library 5-7
double-precision binary to decimal ($CDDMG) — System Library 5-5
general purpose binary to ASCII ($CBTA) — System Library 5-10

Numeric to ASCII (Cont.)
  Radix-50 to ASCII ($C5TA) System Library 5-11
/NV subswitch
  PIP utility Utilities 3-20
/NV switch
  PIP utility Utilities 3-12
NXT field in ALL block
  CLOSE operation RMS-11 Macros 5-3
  CREATE operation RMS-11 Macros 5-9
  DISPLAY operation RMS-11 Macros 5-30
  ENTER operation RMS-11 Macros 5-35
  ERASE operation RMS-11 Macros 5-40
  EXTEND operation RMS-11 Macros 5-46
  offset RMS-11 Macros 6-2
  OPEN operation RMS-11 Macros 5-73
  PARSE operation RMS-11 Macros 5-86
  REMOVE operation RMS-11 Macros 5-102
  RENAME operation RMS-11 Macros 5-108
  SEARCH operation RMS-11 Macros 5-116
  summary RMS-11 Macros 6-13
NXT field in DAT block
  CLOSE operation RMS-11 Macros 5-3
  CREATE operation RMS-11 Macros 5-9
  DISPLAY operation RMS-11 Macros 5-30
  ENTER operation RMS-11 Macros 5-35
  ERASE operation RMS-11 Macros 5-40
  EXTEND operation RMS-11 Macros 5-46
  offset RMS-11 Macros 6-14
  OPEN operation RMS-11 Macros 5-73
  PARSE operation RMS-11 Macros 5-86
  REMOVE operation RMS-11 Macros 5-102
  RENAME operation RMS-11 Macros 5-108
  SEARCH operation RMS-11 Macros 5-116
  summary RMS-11 Macros 6-19
NXT field in KEY block
  CLOSE operation RMS-11 Macros 5-3
  CREATE operation RMS-11 Macros 5-9
  DISPLAY operation RMS-11 Macros 5-30
  ENTER operation RMS-11 Macros 5-35
  ERASE operation RMS-11 Macros 5-40
  EXTEND operation RMS-11 Macros 5-46
  offset RMS-11 Macros 6-67
  OPEN operation RMS-11 Macros 5-73
  PARSE operation RMS-11 Macros 5-86
  REMOVE operation RMS-11 Macros 5-102
  RENAME operation RMS-11 Macros 5-108
  SEARCH operation RMS-11 Macros 5-116
  summary RMS-11 Macros 6-88
NXT field in PRO block
  CLOSE operation RMS-11 Macros 5-3
  CREATE operation RMS-11 Macros 5-9
  DISPLAY operation RMS-11 Macros 5-30
  ENTER operation RMS-11 Macros 5-35
  ERASE operation RMS-11 Macros 5-40
  EXTEND operation RMS-11 Macros 5-46
  offset RMS-11 Macros 6-108
  OPEN operation RMS-11 Macros 5-73
  PARSE operation RMS-11 Macros 5-86
  REMOVE operation RMS-11 Macros 5-102
  RENAME operation RMS-11 Macros 5-108
  SEARCH operation RMS-11 Macros 5-116
  summary RMS-11 Macros 6-111
NXT field in SUM block
  CLOSE operation RMS-11 Macros 5-3
  CREATE operation RMS-11 Macros 5-9
  DISPLAY operation RMS-11 Macros 5-30
  ENTER operation RMS-11 Macros 5-35

NXT field in SUM block (Cont.)
  ERASE operation — RMS-11 Macros 5-40
  EXTEND operation — RMS-11 Macros 5-46
  offset — RMS-11 Macros 6-145
  OPEN operation — RMS-11 Macros 5-73
  PARSE operation — RMS-11 Macros 5-86
  REMOVE operation — RMS-11 Macros 5-102
  RENAME operation — RMS-11 Macros 5-108
  SEARCH operation — RMS-11 Macros 5-116
  summary — RMS-11 Macros 6-150
NXT field in XAB
  chaining XABs to FAB — RMS-11 Macros 2-12
<NXTSYM> symbol — MCR Operations 4-14
$NXTVOL macro — RMS-11 Macros 5-70
  RSTS/E — RMS-11 Macros D-4
NXTVOL operation — RMS-11 Introduction 4-4
  $NXTVOL macro — RMS-11 Macros 5-70
  record stream — RMS-11 Macros 4-9

O

O command — ODT 2-10, 7-1
  ZAP utility — Utilities 15-17
O error — PDP-11 MACRO-11 6-39, 6-53, 7-3, 7-12, 7-14, 7-21
  summary — PDP-11 MACRO-11 D-4
^O operator — PDP-11 MACRO-11 3-5, 6-32
O$-family symbol
  declaring
    ALL block — RMS-11 Macros C-3 to C-4
    DAT block — RMS-11 Macros C-3 to C-4
    FAB field offset — RMS-11 Macros C-1
    KEY block — RMS-11 Macros C-3 to C-4
    NAM block field offset — RMS-11 Macros C-2
    PRO block — RMS-11 Macros C-3 to C-4
    RAB — RMS-11 Macros C-2
    SUM block — RMS-11 Macros C-3 to C-4
    XAB — RMS-11 Macros C-4
  value
    ALL block — RMS-11 Macros 6-2
    DAT block — RMS-11 Macros 6-14
    FAB — RMS-11 Macros 6-22 to 6-24
    KEY block — RMS-11 Macros 6-67 to 6-68
    NAM block — RMS-11 Macros 6-94
    PRO block — RMS-11 Macros 6-108
    RAB — RMS-11 Macros 6-115
    SUM block — RMS-11 Macros 6-145
/OA switch
  RMSRST utility — RMS-11 Utilities 7-9 to 7-10
$$OBF1
  reserved PSECT name — Task Builder E-3
$$OBF2
  reserved PSECT name — Task Builder E-3
.OBJ file type — Program Development 3-4, 7-5
Object
  library
    adding modules — Program Development 6-9 to 6-10
    creating a user — Program Development 6-4 to 6-6
    default search of system — Program Development 1-11, 4-2
    DIGITAL-supplied — Program Development 1-10 to 1-11
    dual use — Program Development 6-8 to 6-9
    listing information — Program Development 6-11 to 6-12
    OTS — Program Development 7-1 to 7-2
    using to resolve undefined global symbols — Program Development 6-8 to 6-9
  module
    concatenated — Program Development 4-3 to 4-4

Object
  module (Cont.)
    FORTRAN IV — Program Development 7-5 to 7-6
    input to TKB — Program Development 4-1
    MACRO-11 — Program Development 1-4, 3-4 to 3-6
Object code
  assembling — RMS-11 User's Guide 1-13, 8-1
  compiling — RMS-11 User's Guide 1-13, 8-1
  patching — Task Builder 11-5
Object file — Introduction 4-3, 4-5 to 4-9, 4-11 to 4-12, Gloss-22
Object module — Introduction 4-3, 4-5 to 4-9, 4-11 to 4-12, Gloss-22
  concatenating — Task Builder 10-7
  content of — Task Builder A-1
  data base
    inserting
      into Executive object library — System Generation (11S) 4-5
  default name — PDP-11 MACRO-11 6-15
  format — Task Builder A-3
  linking — Task Builder 2-1
  name — PDP-11 MACRO-11 1-2
  name assignment — PDP-11 MACRO-11 6-15
  overriding definition in — Task Builder 11-17
  patching — Release Notes 1-47
    PAT utility — Utilities 14-1
  relocatable — Task Builder 2-2
  selective global symbol
    using /SS to include — Task Builder 10-47 to 10-49
  storing in library
    LBR utility — Utilities 10-19
Object module library — Command Language 6-41, RMS-11 User's Guide 8-1
Object Module Patch Utility
  See PAT utility
/OBJECT qualifier — PDP-11 MACRO-11 8-10
Object Time System
  See also OTS
  usage to extend record buffer — Task Builder 11-16
OBJECT_BINARY argument — PDP-11 MACRO-11 8-11
OCB — Executive 5-31, 5-172
OCOP macro
  MML — System Management 12-29
/OCT switch
  DMP utility — Utilities 11-7
Octal conversion
  octal to binary ($COTB) — System Library 4-5
  octal to binary double-word (.OD2CT) — System Library 4-2
Octal number — Introduction 3-2, Gloss-22
Octal operator — ODT 2-7, 4-2 to 4-3
<OCTAL> symbol — MCR Operations 4-9
.OD2CT (Octal to binary double-word) — System Library 4-2
.ODD directive — PDP-11 MACRO-11 6-37
$ODEV
  predefined syntax element in MML — System Management 12-42
$ODEVE
  predefined syntax element in MML — System Management 12-42
ODL — RMS-11 User's Guide 8-3
  autoload indicator — Task Builder 4-2

ODL (Cont.)
  directive — Task Builder 3-22 to 3-23
    .END — Task Builder 3-22
    example use of .NAME — Task Builder 3-27
    .FCTR — Task Builder 3-24
    introduction — Task Builder 3-22
    .NAME — Task Builder 3-26
    .NAME attributes — Task Builder 3-27
    .PSECT — Task Builder 3-28
    .ROOT — Task Builder 3-22
  efficiently placing in
    autoload indicator — Task Builder 4-6
  enabling operator
    memory-resident overlay — Task Builder 10-34
  file
    declaring a — Task Builder 10-28
  multiple-tree
    defining structure — Task Builder 3-29
    example — Task Builder 3-30 to 3-31
    structure — Task Builder 3-29
  operator
    , (comma) — Task Builder 3-23
    ! (exclamation point) — Task Builder 3-23, 3-25 to 3-26
    - (hyphen) — Task Builder 3-23
    introduction — Task Builder 3-23
  summary — Task Builder 3-48 to 3-51
  using indirect file with — Task Builder 3-29
ODL file
  creating
    start of procedure — Task Builder 3-35
    with allocation diagram — Task Builder 3-34 to 3-35
  DAPRLX — RMS-11 User's Guide 8-7
  .FCTR statement
    creating from allocation diagram — Task Builder 3-37 to 3-38
  prototype — RMS-11 User's Guide 8-3
  RMSRLX — RMS-11 User's Guide 8-7
  .ROOT statement
    creating from allocation diagram — Task Builder 3-36
  standard — RMS-11 User's Guide 8-3, 8-5
    DAP11X — RMS-11 User's Guide 8-6
    RMS11S — RMS-11 User's Guide 8-5
    RMS11X — RMS-11 User's Guide 8-5
    RMS12X — RMS-11 User's Guide 8-6
  virtual address space
    in allocation diagram — Task Builder 3-35
ODL statement
  co-tree
    from allocation diagram — Task Builder 3-38 to 3-39
ODT — Program Development 1-6 to 1-7
  at sign (@) — Program Development 5-8
  B command — Program Development 5-6
  backslash () — Program Development 5-5
  breakpoint register — Program Development 5-6
  changing location contents — Program Development 5-7
  correcting input — Program Development 5-3
  dollar sign ($) — Program Development 5-6 to 5-8
  error conditions in task — Program Development 5-8
  examining locations — Program Development 5-4 to 5-5
  forming address — Program Development 5-4
  G command — Program Development 5-6, 5-8
  including in a task — Program Development 5-1 to 5-2
  LINE FEED key — Program Development 5-5, 5-7 to 5-8
  map use — Program Development 5-2
  ODT.OBJ file — Program Development 5-1

ODT (Cont.)
  overview — ODT 1-1
  P command — Program Development 5-7
  question mark (?) — Program Development 5-3
  R command — Program Development 5-3
  relocation register — Program Development 5-2 to 5-4
  RETURN key — Program Development 5-8
  setting breakpoints — Program Development 5-6
  setting up a task with — Program Development 1-7
  slash (/) — Program Development 5-4
  source listing use — Program Development 5-4
  SST within — Program Development 5-8
  terminating task execution — Program Development 5-8
  underline (_) — Program Development 5-2
  X command — Program Development 5-8
ODT on-line debugger
  ZAP utility — Utilities 15-1
ODT Reference Manual
  note to — Release Notes 1-54
ODT vector — Task Builder 11-24
ODTID module — ODT 1-3
.ODTL1
  reserved global symbol — Task Builder E-1
.ODTL2
  reserved global symbol — Task Builder E-1
ODTV option — Task Builder 11-24
$OFF macro — RMS-11 Macros 2-11
Offset — ODT 2-3, 7-1
  branch — ODT 7-2
  calculation — ODT 2-10, 7-1
  negative — ODT 7-2
  PC-relative — ODT 7-2
Offset mode — Crash Dump Analyzer 3-1
Offspring Control Block
  See OCB
Offspring task
  status values — Executive 4-3
OFNB$X macro call
  format — I/O Operations 3-14
.OLB file type — Program Development 6-4
  See also LBR
On-line
  definition — System Generation (11M) 1-6
  formatting (FMT) — System Generation (11M) 4-27
On-Line Debugging Tool
  See ODT
On-Line Task Loader
  See OTL
One's complement operator — PDP-11 MACRO-11 3-5, 6-35 to 6-36
One-word floating-point number — PDP-11 MACRO-11 6-35 to 6-36
.ONERR directive — MCR Operations 4-43
  example — MCR Operations 4-44
  format — MCR Operations 4-43
$ONUM
  predefined syntax element in MML — System Management 12-40
Op code
  See Operation code
OP command
  EDI editor — Utilities 2-39
OPEN command — MCR Operations 3-135
  Basic MCR — System Generation (11S) 2-3
  command line format — MCR Operations 3-135
  control character — MCR Operations 3-135
  error message — MCR Operations 3-138
  example — MCR Operations 3-138
  exiting — MCR Operations 3-136

OPEN command (Cont.)
  keyword
    /DRV — MCR Operations 3-136
    /KNL — MCR Operations 3-137
    /PAR — MCR Operations 3-137
    /TASK — MCR Operations 3-137
  line terminator — MCR Operations 3-136
.OPEN directive — MCR Operations 4-44
  example — MCR Operations 4-44
  format — MCR Operations 4-44
OPEN LINE function — EDT Editor 5-11
$OPEN macro — RMS-11 Macros 5-72
  RSTS/E — RMS-11 Macros D-4
OPEN operation — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-18; RMS-11 Macros 3-7
  BDB requirement — RMS-11 Macros 2-8
  I/O buffer requirement — RMS-11 Macros 2-7
  IFAB requirement — RMS-11 Macros 2-5
  $OPEN macro — RMS-11 Macros 5-72
  remote access — RMS-11 User's Guide B-2 to B-3
  wildcard loop — RMS-11 Macros 3-10 to 3-11
OPEN SECONDARY command
  EDI editor — Utilities 2-39
OPEN$ macro call
  format — I/O Operations 3-17
OPEN$x
  restrictions — I/O Operations 3-3
  suffixes for — I/O Operations 3-2
OPEN$x macro call
  file access privileges — I/O Operations 3-3
  format — I/O Operations 3-5
.OPENA directive — MCR Operations 4-44
  example — MCR Operations 4-45
  format — MCR Operations 4-45
Opening
  a file — I/O Operations 3-2
  a new file — I/O Operations 3-8
  absolute location — ODT 2-5, 4-4
  an existing file — I/O Operations 3-4, 3-8
  byte location — ODT 4-2 to 4-6
  location
    definition — ODT 4-1
  PC-relative location — ODT 2-5, 4-5
  preceding location — ODT 2-5, 4-4
  relative branch location — ODT 2-6, 4-5
  sequential location — ODT 2-5, 4-4
  word location — ODT 4-2 to 4-6
.OPENR directive — MCR Operations 4-45
  example — MCR Operations 4-45
  format — MCR Operations 4-45
OPENREGISTER command — MCR Operations 3-135
Operand field — PDP-11 MACRO-11 2-1, 2-4
  separator — PDP-11 MACRO-11 3-2
Operating mode
  Indirect
    disabling — MCR Operations 4-31
    enabling — MCR Operations 4-32
    initial setting — MCR Operations 4-32
    list — MCR Operations 4-32
    testing — MCR Operations 4-40
Operating system — Introduction 1-1, 4-1, 5-1, 5-4, Gloss-23; RMS-11 User's Guide 1-13
  allocating system resources — RMS-11 User's Guide 8-13
  block locking — RMS-11 User's Guide 3-6
  command line — EDT Editor 2-2

Operating system (Cont.)
  compatibility — RMS-11 User's Guide 3-4
  defaults — RMS-11 User's Guide 2-2
    DEQ — RMS-11 User's Guide 3-5
  FALs — RMS-11 User's Guide B-3
  protection codes
    and shared access — RMS-11 User's Guide 2-5
  remote access
    RSTS/E — RMS-11 User's Guide B-3
    RSX-11M/M-PLUS — RMS-11 User's Guide B-3
    VAX/VMS — RMS-11 User's Guide B-1, B-3
  return to — ODT 2-11
Operating system failure — Error Logging 1-1
Operation — RMS-11 Introduction 4-1; RMS-11 Macros 1-2
  asynchronous — RMS-11 Introduction 4-4; RMS-11 User's Guide 2-17, 3-14, 4-14, 7-8, 8-2, 8-4, 8-7 to 8-8
  block — RMS-11 Introduction 4-7
  CLOSE — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-18
  CONNECT — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    indexed files — RMS-11 User's Guide 7-2
    relative files — RMS-11 User's Guide 4-7
    sequential files — RMS-11 User's Guide 3-7
  CREATE — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-18
    and shared access — RMS-11 User's Guide 2-6
    file versions — RMS-11 User's Guide A-3
    remote access — RMS-11 User's Guide B-2 to B-3
  DELETE — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    and key position — RMS-11 User's Guide 6-7
    and shared access — RMS-11 User's Guide 2-6
    deferred write — RMS-11 User's Guide 7-9
    duplicate keys — RMS-11 User's Guide 6-9
    indexed files — RMS-11 User's Guide 5-15, 7-3
    relative files — RMS-11 User's Guide 4-7
  directory — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17
    indexed files — RMS-11 User's Guide 7-10
    relative files — RMS-11 User's Guide 4-15
    sequential files — RMS-11 User's Guide 3-15
  DISCONNECT — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    indexed files — RMS-11 User's Guide 7-3
    relative files — RMS-11 User's Guide 4-8
    sequential files — RMS-11 User's Guide 3-7
  DISPLAY — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-18
  ENTEND — RMS-11 Introduction 4-2
  ENTER — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17
    file versions — RMS-11 User's Guide A-3
    remote access — RMS-11 User's Guide B-1
  ERASE — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-18
    remote access — RMS-11 User's Guide B-2
    wildcard operations — RMS-11 User's Guide A-4
  EXTEND — RMS-11 User's Guide 1-18
    and shared access — RMS-11 User's Guide 2-6
  file — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-18
    indexed files — RMS-11 User's Guide 7-10
    optimizations — RMS-11 User's Guide 8-10

Operation
  file (Cont.)
    relative files — RMS-11 User's Guide 4-15
    sequential files — RMS-11 User's Guide 3-15
  FIND — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    access modes — RMS-11 Introduction 4-6
    and bucket locking — RMS-11 User's Guide 2-8
    and shared access — RMS-11 User's Guide 2-6, 2-10
    and stream records — RMS-11 User's Guide 2-16
    deferred write — RMS-11 User's Guide 7-9
    indexed files — RMS-11 User's Guide 5-13, 5-17, 7-3
    key access — RMS-11 User's Guide 1-16
    relative files — RMS-11 User's Guide 4-8
    RFA access — RMS-11 User's Guide 1-16
    sequential access — RMS-11 User's Guide 1-16
    sequential files — RMS-11 User's Guide 3-7
  FLUSH — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    indexed files — RMS-11 User's Guide 7-5
    relative files — RMS-11 User's Guide 4-10
    sequential files — RMS-11 User's Guide 3-9
  FREE — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    and shared access — RMS-11 User's Guide 2-10
  from high-level languages — RMS-11 Introduction 4-7
  GET — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    access modes — RMS-11 Introduction 4-6
    and bucket locking — RMS-11 User's Guide 2-8
    and ODLs — RMS-11 User's Guide 8-5
    and shared access — RMS-11 User's Guide 2-6, 2-10
    and stream records — RMS-11 User's Guide 2-16 to 2-17
    deferred write — RMS-11 User's Guide 7-9
    indexed files — RMS-11 User's Guide 5-13, 5-17, 7-5
    key access — RMS-11 User's Guide 1-16
    locate mode — RMS-11 User's Guide 3-14, 4-13, 7-8
    move mode — RMS-11 User's Guide 3-13, 4-12, 7-7
    relative files — RMS-11 User's Guide 4-10
    RFA access — RMS-11 User's Guide 1-16
    sequential access — RMS-11 User's Guide 1-16
    sequential files — RMS-11 User's Guide 3-9
  NXTVOL — RMS-11 Introduction 4-4
  OPEN — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-18
    remote access — RMS-11 User's Guide B-2 to B-3
  optimizations — RMS-11 User's Guide 8-10
  PARSE — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17
    remote access — RMS-11 User's Guide B-1
  PUT — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    access modes — RMS-11 Introduction 4-6
    and key position — RMS-11 User's Guide 6-7
    and ODLs — RMS-11 User's Guide 8-5
    and shared access — RMS-11 User's Guide 2-6
    and stream records — RMS-11 User's Guide 2-17
    deferred write — RMS-11 User's Guide 7-9
    duplicate keys — RMS-11 User's Guide 6-9
    indexed files — RMS-11 User's Guide 5-10, 5-17, 7-5, 7-9
    initial allocation — RMS-11 User's Guide 4-4
    key access — RMS-11 User's Guide 1-16

Operation
  PUT (Cont.)
    locate mode — RMS-11 User's Guide 3-14
    mass insertion — RMS-11 User's Guide 7-9
    move mode — RMS-11 User's Guide 3-13, 4-12, 7-7
    relative files — RMS-11 User's Guide 4-11
    sequential access — RMS-11 User's Guide 1-16
    sequential files — RMS-11 User's Guide 3-10
  READ — RMS-11 Introduction 4-7
    access modes — RMS-11 Introduction 4-7
  record — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-10, 1-15
    and I/O costs — RMS-11 User's Guide 5-17
    and indexed files — RMS-11 User's Guide 5-9, 5-16
    indexed files — RMS-11 User's Guide 7-2
    optimizations — RMS-11 User's Guide 8-10
    relative files — RMS-11 User's Guide 4-7
    sequential files — RMS-11 User's Guide 3-7
  REMOVE — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17
    remote access — RMS-11 User's Guide B-1
    wildcard operations — RMS-11 User's Guide A-4
  RENAME — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17
    file versions — RMS-11 User's Guide A-3
    remote access — RMS-11 User's Guide B-1
    wildcard operations — RMS-11 User's Guide A-4
  REWIND — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    indexed files — RMS-11 User's Guide 7-6
    relative files — RMS-11 User's Guide 4-12
    sequential files — RMS-11 User's Guide 3-11
  routine
    calling — RMS-11 Macros 2-13
    return — RMS-11 Macros 2-14
  SEARCH — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17
    remote access — RMS-11 User's Guide B-1
  SPACE — RMS-11 Introduction 4-7
    access modes — RMS-11 Introduction 4-7
  stream — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    indexed files — RMS-11 User's Guide 7-2
    relative files — RMS-11 User's Guide 4-7
    sequential files — RMS-11 User's Guide 3-7
  synchronous — RMS-11 Introduction 4-4; RMS-11 User's Guide 8-2
  TRUNCATE — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    and shared access — RMS-11 User's Guide 2-6
    sequential files — RMS-11 User's Guide 3-12
  UPDATE — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
    and ODLs — RMS-11 User's Guide 8-5
    and record size — RMS-11 User's Guide 2-16
    and shared access — RMS-11 User's Guide 2-6, 2-10
    and stream records — RMS-11 User's Guide 2-17
    changeable keys — RMS-11 User's Guide 6-10
    deferred write — RMS-11 User's Guide 7-9
    duplicate keys — RMS-11 User's Guide 6-9
    indexed files — RMS-11 User's Guide 5-14, 7-6
    move mode — RMS-11 User's Guide 3-13 to 3-14, 4-12 to 4-13, 7-7 to 7-8
    relative files — RMS-11 User's Guide 4-12
    sequential files — RMS-11 User's Guide 3-12
  using — RMS-11 Macros 2-9

Operation (Cont.)
  WAIT — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
  WRITE — RMS-11 Introduction 4-7
    access modes — RMS-11 Introduction 4-7
    and shared access — RMS-11 User's Guide 2-6
Operation code
  comercial instruction — PDP-11 MACRO-11 C-3 to C-4
  floating-point — PDP-11 MACRO-11 C-4 to C-5
  PDP-11 — PDP-11 MACRO-11 C-1 to C-3
Operation macro — RMS-11 Macros 1-2, 2-9
Operator — ODT 2-3 to 2-4, 2-7, 4-2; Introduction Gloss-23
  See also SLP utility
  arithmetic — MCR Operations 4-14
  ASCII (/) — ODT 2-7
  backslash () — ODT 4-3
  backslash (\) — ODT 2-7, 4-2 to 4-3
  binary — PDP-11 MACRO-11 3-5 to 3-6
    addition — PDP-11 MACRO-11 3-5
    division — PDP-11 MACRO-11 3-5
    evaluation of multiple — PDP-11 MACRO-11 3-6
    logical AND — PDP-11 MACRO-11 3-5
    logical inclusive OR — PDP-11 MACRO-11 3-5
    multiplication — PDP-11 MACRO-11 3-5
    precedence with unary — PDP-11 MACRO-11 3-16
    subtraction — PDP-11 MACRO-11 3-5
  byte mode
    ASCII — ODT 2-7
    octal — ODT 2-7, 4-2 to 4-3
  comma (,) — ODT 2-4
  equal sign (=) — ODT 2-8, 7-2
  field — PDP-11 MACRO-11 2-1, 2-3 to 2-4
  logical — MCR Operations 4-14
  minus sign (-) — ODT 2-3 to 2-4
  ODL — Task Builder 3-23
    , (comma) — Task Builder 3-23
    ! (exclamation point) — Task Builder 3-23, 3-25 to 3-26
    - (hyphen) — Task Builder 3-23
    introduction — Task Builder 3-23
  plus sign (+) — ODT 2-3 to 2-4
  Radix-50 (%) — ODT 2-7
  slash (/) — ODT 4-2 to 4-3
  unary — PDP-11 MACRO-11 3-4
    binary radix control — PDP-11 MACRO-11 3-5, 6-32
    decimal radix control — PDP-11 MACRO-11 3-5, 6-32
    evaluation of multiple — PDP-11 MACRO-11 3-4
    macro call use — PDP-11 MACRO-11 7-5
    minus — PDP-11 MACRO-11 3-4
    numeric control — PDP-11 MACRO-11 6-33, 6-35
    octal radix control — PDP-11 MACRO-11 3-5, 6-32
    one's complement — PDP-11 MACRO-11 3-5, 6-35 to 6-36
    one-word floating-point — PDP-11 MACRO-11 3-5, 6-35 to 6-36
    plus — PDP-11 MACRO-11 3-4
    precedence over binary — PDP-11 MACRO-11 3-16
    radix control — PDP-11 MACRO-11 6-31 to 6-33
    Radix-50 control — PDP-11 MACRO-11 3-5, 6-30
    two's complement — PDP-11 MACRO-11 3-4
    universal — PDP-11 MACRO-11 3-5
  word mode
    ASCII — ODT 2-7
    octal — ODT 2-7, 4-2 to 4-3
OPT macro
  MML — System Management 12-35 to 12-36
Optimization
  allocating system resources — RMS-11 User's Guide 8-13
  application design — RMS-11 User's Guide 2-11

Optimization (Cont.)
  DELETE operation — RMS-11 User's Guide 6-7
  disk usage — RMS-11 User's Guide 8-13
  operations — RMS-11 User's Guide 8-10
  overlays — RMS-11 User's Guide 8-1
  program development — RMS-11 User's Guide 8-9
  PUT operation — RMS-11 User's Guide 6-7
  task building — RMS-11 User's Guide 8-10
  virtual-to-logical block mapping — RMS-11 User's Guide 8-11
  window turning — RMS-11 User's Guide 8-12
Option
  category of — Task Builder 11-1
  general form of — Task Builder 1-4
  input
    in command line — Task Builder 1-3
  linking to region — Task Builder 5-14
  separation of argument list — Task Builder 1-4 to 1-5
  summary — Task Builder 11-2
  Task Builder — Task Builder 1-4, 11-1
    ABORT — Task Builder 11-4
    ABSPAT — Task Builder 11-5
    ACTFIL — Task Builder 11-6
    ASG — Task Builder 11-7
    CLSTR — Task Builder 11-8 to 11-9
    COMMON or LIBR — Task Builder 11-11 to 11-12
    DSPPAT — Task Builder 11-13
    EXTSCT — Task Builder 11-14
    EXTTSK — Task Builder 11-15
    FMTBUF — Task Builder 11-16
    GBLDEF — Task Builder 11-17
    GBLINC — Task Builder 11-18
    GBLPAT — Task Builder 11-19
    GBLREF — Task Builder 11-20
    GBLXCL — Task Builder 11-21
    MAXBUF — Task Builder 11-23
    ODTV — Task Builder 11-24
    PAR — Task Builder 11-25 to 11-26
    PRI — Task Builder 11-27
    RESCOM or RESLIB — Task Builder 11-28 to 11-29
    STACK — Task Builder 11-32
    TASK — Task Builder 11-34
    TSKV — Task Builder 11-35
    UIC — Task Builder 11-36
    UNITS — Task Builder 11-37
    VSECT — Task Builder 11-38
    WNDWS — Task Builder 11-39
Option summary — Task Builder 11-3
OPTR macro
  MML — System Management 12-35 to 12-36
ORG field in FAB
  CREATE operation — RMS-11 Macros 5-11
  offset — RMS-11 Macros 6-23
  OPEN operation — RMS-11 Macros 5-78
  summary — RMS-11 Macros 6-58
ORG$ macro — RMS-11 Macros 2-2
ORGANIZATION
  RMSDES utility — RMS-11 Utilities 2-31
Organization
  See File organization
  See ORG field in FAB
Original line number — EDT Editor 6-8
ORIGINAL number
  range specification — EDT Editor 6-8
$OSEP
  predefined syntax element in MML — System Management 12-44

OTL — System Generation (11S) 1-1, 2-1, 2-6
  building — System Generation (11S) 4-7
  command line — System Generation (11S) 2-7
  device
    supported — System Generation (11S) 2-6
  error message — System Generation (11S) 2-10
  /INC switch — System Generation (11S) 2-8
  initiating — System Generation (11S) 2-7
  loading
    common block — System Generation (11S) 2-10
    method — System Generation (11S) 2-9 to 2-10
    task — System Generation (11S) 2-9
  operation — System Generation (11S) 2-8
  partition
    system-controlled — System Generation (11S) 2-6
  programming hint — System Generation (11S) 2-9
  size — System Generation (11S) 1-3
  terminating — System Generation (11S) 2-7
  transferring task — System Generation (11S) 2-7
OTS
  library — Program Development 7-1 to 7-2
  usage to extend record buffer — Task Builder 11-16
$OTSV
  low-memory context — Task Builder B-10
  reserved global symbol — Task Builder E-2
OU ON/OFF command
  EDI editor — Utilities 2-40
$OUIC
  predefined syntax element in MML — System Management 12-42
$OUICE
  predefined syntax element in MML — System Management 12-42
/OUT keyword
  HELP command — MCR Operations 3-66
Outfile
  RMSBCK utility — RMS-11 Utilities 6-3
  RMSCNV utility — RMS-11 Utilities 4-4
  RMSDSP utility — RMS-11 Utilities 5-3
  RMSIFL utility — RMS-11 Utilities 3-3
  RMSRST utility — RMS-11 Utilities 7-3
Output
  displayed
    resuming — MCR Operations 2-16 to 2-17
    suppressing — MCR Operations 2-16
    suspending — MCR Operations 2-17
  displaying — MCR Operations 3-182
Output file — Introduction 4-6, 4-10, Gloss-23
  omitting specific — Task Builder 1-3
Output file switch
  RMSBCK utility — RMS-11 Utilities 6-6
  RMSIFL utility — RMS-11 Utilities 3-5
  RMSRST utility — RMS-11 Utilities 7-7
Output listing limit switch — Crash Dump Analyzer 2-7
OUTPUT ON/OFF command
  EDI editor — Utilities 2-40
OUTPUT qualifier (DCL) — EDT Editor 4-3
/OUTVOLUME qualifier
  BRU utility — Utilities 7-20
OVCTC module — Task Builder 5-52
OVCTL module — Task Builder 5-52
OVCTR module — Task Builder 5-52
OVDAT module — Task Builder 5-53

$$OVDT
  PSECT — Task Builder 5-53
  reserved PSECT name — Task Builder E-3
Overflow mode — MCR Operations 4-33
Overlapped seek — I/O Drivers 5-7
Overlay — Task Builder 2-10; RMS-11 User's Guide 8-2
  allocation diagram
    creating ODL file with — Task Builder 3-34 to 3-39
  and disk usage — RMS-11 User's Guide 8-14
  autoload vector in — Task Builder 3-20
  building an — Task Builder 3-40 to 3-47
  building memory-resident
    for region — Task Builder 5-9
  capability of an — Task Builder 3-1
  choosing a memory-resident — Task Builder 3-14
  co-tree — Task Builder 3-33 to 3-34
  data base — Task Builder B-15
    I- and D-space task — Task Builder B-16
  data structure — Task Builder 3-19
    linked into root — Task Builder 3-20
  defining a multiple-tree — Task Builder 3-30 to 3-31
  description
    effect on performance — Task Builder F-4
  disk-resident — Task Builder 3-1 to 3-2; RMS-11 User's Guide 1-13, 8-3, 8-8 to 8-9
    defined — Task Builder 4-1
  effect of
    on physical memory — Task Builder 3-5
    on virtual address space — Task Builder 3-5
  effect of virtual address space
    on disk-resident — Task Builder 3-1 to 3-4
  effect on memory
    of a disk-resident — Task Builder 3-2
    of disk-resident — Task Builder 3-1, 3-3 to 3-4
  effect on physical memory
    of memory-resident — Task Builder 3-6
  effect on virtual address space
    of a memory-resident — Task Builder 3-6
  error handling — Task Builder 4-12
  example of building a — Task Builder 3-40 to 3-47
  loading
    asynchronously — Task Builder 4-10
    disk-resident — Task Builder 4-1
    mechanism — Task Builder 3-16
    memory-resident — Task Builder 4-1
    methods — Task Builder 4-1
    synchronously — Task Builder 4-8 to 4-9
  MCR — MCR Operations 1-5
  memory-resident — Task Builder 3-1, 3-6; RMS-11 User's Guide 1-13, 8-3, 8-6
    conserving physical memory — Task Builder 3-14
    defined — Task Builder 4-1
    physical memory usage — Task Builder 3-6
    region — Task Builder 5-9
    virtual address space — Task Builder 3-14
  of program
    in high-level language — Task Builder 3-39 to 3-40
  operator
    enabling recognition of — Task Builder 10-34
    suppression of a
      memory-resident — Task Builder 10-34
  path loading in an — Task Builder 4-4
  physical memory — Task Builder 3-32 to 3-34
  program section

Overlay
  program section (Cont.)
    specifying — Task Builder 3-19
  region
    autoload vector — Task Builder 5-11
    building — Task Builder 5-9
    building option — Task Builder 5-10 to 5-11
    descriptor in — Task Builder 3-20
    example of building — Task Builder 5-10
    global symbols in .STB file — Task Builder 5-11
    resolving symbol — Task Builder 5-10 to 5-11
    restrictions — Task Builder 5-12
    .STB file — Task Builder 5-11
    vectors in I- and D-space task — Task Builder 5-11
  root segment structure — Task Builder 3-21
  run-time — Task Builder 3-19
    comparison of sizes in routine — Task Builder 4-16
    module sizes — Task Builder 5-52 to 5-53
    routine — Task Builder 3-19, 4-16
    size of routine — Task Builder 4-16
    support requirements — Task Builder 5-12, 5-51 to 5-53
    use of routine — Task Builder 4-14 to 4-15
  segment
    alignment — Task Builder 10-8
    arrangement — Task Builder 3-15
    descriptor in — Task Builder 3-20
    processing order — Task Builder 3-17
    symbol processing — Task Builder 3-17
  structure
    considerations in creating — Task Builder 3-1
    most effective — Task Builder 3-2
    multiple-tree — Task Builder 3-18
    multiply defined global symbol — Task Builder 3-16
    specifying library search in a — Task Builder 10-23
  task — Task Builder 3-7, 3-9
    global cross-reference of — Task Builder 4-12 to 4-14
    segment calls — Task Builder 3-10
    virtual address space — Task Builder 3-10
  tree — Task Builder 3-15
    calling segments in an — Task Builder 4-6
  virtual
    address space — Task Builder 3-32 to 3-34
    address space and memory — Task Builder 3-11 to 3-14
  window
    block — Task Builder 3-48
    descriptor in — Task Builder 3-20
  written in high-level language — Task Builder 3-39 to 3-40
OVERLAY command
  EDI editor — Utilities 2-40
Overlay Description Language
  introduction — Task Builder 3-15
  See also ODL
Overlay Description Operator
  See ODL
Overlay structure
  global symbol
    ambiguously defined — Task Builder 3-16
Overlay tree diagram
  virtual address space — Task Builder 3-23
Override block size
  ANSI magtape — I/O Operations 2-18
  parameter to FDBF$A — I/O Operations 2-17

/OVERRIDE switch
  BAD utility — Utilities 6-6
Overriding default buffer size — I/O Operations 1-8
Overriding FCS defaults for
    magtape — I/O Operations 5-7
OVIDC module — Task Builder 5-52
OVIDL module — Task Builder 5-52
OVIDR module — Task Builder 5-52
/OVR keyword
  HOME command — MCR Operations 3-73
  MOUNT command — MCR Operations 3-122
/OVR switch
  FMT utility — Utilities 5-9
OVR symbolic argument — PDP-11 MACRO-11 6-42
/OVRACC keyword
  MOUNT command — MCR Operations 3-122
/OVREXP keyword
  MOUNT command — MCR Operations 3-122
/OVRFSID keyword
  MOUNT command — MCR Operations 3-122
$$OVRS
  reserved PSECT name — Task Builder E-3
OWNER
  RMSDES utility — RMS-11 Utilities 2-34
OWNER command
  RMD — System Management 6-9
Owner group — MCR Operations 2-3
/OWNER keyword
  HOME command — MCR Operations 3-73
  INI command — MCR Operations 3-83
Owner, file
  See PRG field in PRO block
/OWNER_UIC qualifier
  SHOW QUEUE command — Batch and Queue 2-16

P

P command — ODT 2-10, 3-2 to 3-3
  ODT — Program Development 5-7
P error — PDP-11 MACRO-11 3-12, 3-14, 6-20, 6-38, 7-16
  summary — PDP-11 MACRO-11 D-4
/P switch — Error Logging 3-5, 3-8
P$-family macro
  declaring — RMS-11 Macros C-2
P$BDB macro
  argument computation — RMS-11 Macros 2-8
  format — RMS-11 Macros 2-4
P$BUF macro
  argument computation — RMS-11 Macros 2-7
  format — RMS-11 Macros 2-4
P$FAB macro
  argument computation — RMS-11 Macros 2-5
  format — RMS-11 Macros 2-4
P$IDX macro
  argument computation — RMS-11 Macros 2-5
  format — RMS-11 Macros 2-4
P$RAB macro
  argument computation — RMS-11 Macros 2-5
  format — RMS-11 Macros 2-4
P$RABX macro
  argument computation — RMS-11 Macros 2-5 to 2-6
  format — RMS-11 Macros 2-4
/PA job switch
  QUE /MOD command — Batch and Queue 2-20
/PA switch
  PRI command — Batch and Queue 2-4

Packed decimal key — RMS-11 User's Guide 6-6
  See also XB$PAC mask in DTP field
.PACKED directive — PDP-11 MACRO-11 6-31
Packet information function — Error Logging 5-22
Packet number — Error Logging 3-1
Packet number switch — Error Logging 3-5, 3-8
Packet selection switches — Error Logging 3-8
PACKET statement — Error Logging 5-28
Packing decimal number — PDP-11 MACRO-11 6-31
Padding character
  RMSCNV utility — RMS-11 Utilities 4-12
  RMSIFL utility — RMS-11 Utilities 3-6
Page
  display
    RMD — System Management 6-1
Page Address Register
  See PAR
PAGe command
  EDI editor — Utilities 2-41
Page Description Register
  See PDR
.PAGE directive — PDP-11 MACRO-11 6-17 to 6-18; Program Development 2-6
Page ejection — PDP-11 MACRO-11 6-17
PAGE FIND command
  EDI editor — Utilities 2-41
PAGE function — EDT Editor 5-20
Page header — PDP-11 MACRO-11 6-4
PAGE LOCATE command
  EDI editor — Utilities 2-41
/PAGE_COUNT job qualifier
  SET QUEUE command — Batch and Queue 2-20
/PAGE_COUNT qualifier
  PRINT command — Batch and Queue 2-4
Paging — RMS-11 User's Guide 8-10
Paging, memory
  See Virtual memory management
Panic Dump routine — Writing I/O Driver 3-19
  sample output — Writing I/O Driver 3-20
Paper tape
  error conditions — I/O Drivers 17-4
  punch — I/O Drivers 17-1
  reader — I/O Drivers 17-1
  ready recovery — I/O Drivers 17-4
  saving system on — System Management 10-40 to 10-41
  standard QIO — I/O Drivers 17-2
  status return — I/O Drivers 17-3 to 17-4
  system image
    booting — System Generation (11S) 2-17
    saving — System Generation (11S) 2-17
/PAR — Crash Dump Analyzer 2-2
PAR — Task Builder 2-16
  option — Task Builder 11-25
PAR command — MCR Operations 3-140
  command line format — MCR Operations 3-141
  example — MCR Operations 3-141
  VMR — System Management 10-30
    command line format — System Management 10-30
    example — System Management 10-30
/PAR keyword
  INSTALL command — MCR Operations 3-95
    VMR — System Management 10-22
  LOAD command — MCR Operations 3-105
    VMR — System Management 10-27
  OPEN command — MCR Operations 3-137
  RUN command — MCR Operations 3-153

PAR option — Task Builder 11-26
  building region — Task Builder 5-2
Parallel Communications Link
  See PCL
Parallel interface
  DA11-B — I/O Drivers 12-2
Parameter
  DCL — Command Language 1-8
  IOX
    command category — System Management 4-3
    default overriding with FILES11 — System Management 4-38
    default overriding with SELECT — System Management 4-56
    default shown with PARAMETERLIST — System Management 4-42
    device-dependent exercise — System Management 4-8
    exercising Files-11 volumes — System Management 4-9
    exercising magtape — System Management 4-11
    exercising NFS volume — System Management 4-14
    list of general exercise — System Management 4-8
PARAMETERLIST command
  IOX — System Management 4-42
    displaying buffer space — System Management 4-42
    displaying defaults — System Management 4-42
Parent connection
  creating — Executive 4-1
  transferring — Executive 4-1
Parent/offspring tasking — Executive 4-1
Parentheses
  use of
    in ODL — Task Builder 3-23
/PARM keyword
  MOUNT command — MCR Operations 3-123
PARS1M — Error Logging 4-4
PARS2M — Error Logging 4-4
PARS3M — Error Logging 4-4
.PARSE — I/O Operations 4-8
Parse — Introduction Gloss-23
.PARSE directive — MCR Operations 4-46
  example — MCR Operations 4-46
  format — MCR Operations 4-46
$PARSE macro — RMS-11 Macros 5-86
  example — RMS-11 Macros 7-3, 7-7, 7-11, 7-15
PARSE operation — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17; RMS-11 Macros 3-6
  BDB requirement — RMS-11 Macros 2-8
  I/O buffer requirement — RMS-11 Macros 2-7
  IFAB requirement — RMS-11 Macros 2-5
  $PARSE macro — RMS-11 Macros 5-86
  remote access — RMS-11 User's Guide B-1
  wildcard initialization — RMS-11 Macros 3-9
PARSEM — Error Logging 4-4
Parser program
  generating — I/O Operations 7-14
Parser table
  DCL — System Management 12-6 to 12-12, 12-17 to 12-20, 12-46 to 12-47
Partition — Introduction 5-6 to 5-7, 5-10, Gloss-24; Command Language 7-38 to 7-45, 9-32; MCR Operations 2-19
  base address — Crash Dump Analyzer 3-21

Partition (Cont.)
common — MCR Operations 3-186; System Management 14-1
creating — System Generation (11S) 4-10; MCR Operations 3-185; System Management 10-51
creating with SYSVMR.CMD — System Generation (11M) 5-14
declaring — Task Builder 11-25
device — MCR Operations 3-186; System Management 10-51
displaying
  information — System Generation (11S) 2-22
driver
  relative address
    accessing — MCR Operations 3-136
DRVPAR — System Generation (11M) 5-10, 5-16
eliminating — MCR Operations 3-187; System Management 10-52
EXCOM1 — System Generation (11M) 5-15
EXCOM2 — System Generation (11M) 5-15
FCPPAR — System Generation (11M) 5-16
fragmentation — System Management 14-3
GEN — System Generation (11M) 5-12, 5-16 to 5-17
  specifying a base address — System Generation (11M) 7-4
in region — Task Builder 5-28
information
  acquiring
    for command file — MCR Operations 4-54
  displaying — MCR Operations 3-140; System Management 10-30
main — System Management 10-51
  creating — MCR Operations 3-185
name — Crash Dump Analyzer 3-21
naming for target system — Task Builder C-1
option — Task Builder 11-25
PAR14K — System Generation (11M) 5-18
PCB address — Crash Dump Analyzer 3-21
relative address
  accessing — MCR Operations 3-137
requirement
  shared region — Task Builder 5-3
requirements
  region — Task Builder 5-2
size
  for TKB — Task Builder F-2
  specifying — System Management 10-51
specifying a base addrress — System Generation (11M) 5-12
specifying for region — Task Builder 5-28
SPLPAR — System Generation (11M) 5-13, 5-17 to 5-18
  specifying a base address — System Generation (11M) 7-5
SYSPAR — System Generation (11M) 5-12, 5-16 to 5-18
  specifying a base address — System Generation (11M) 7-5
system-controlled — System Generation (11S) 2-6; System Generation (11M) 4-34; MCR Operations 2-20, 3-186; System Management 14-1
  boundary
    moving — MCR Operations 3-202; System Management 10-47, 10-63
task — MCR Operations 3-186
TTPAR — System Generation (11M) 5-15
type — MCR Operations 2-20, 3-140, 3-186; System Management 10-51

Partition (Cont.)
  user-controlled — MCR Operations 2-20, 3-186; System Management 14-1
    dividing — MCR Operations 2-20
Partition Control Block
  See PCB
Partition control block switch — Crash Dump Analyzer 2-5
PARTITION DEFINITIONS command — MCR Operations 3-140
  VMR — System Management 10-30
Partition information
  attachment descriptor — Crash Dump Analyzer 3-34
  wait queue — Crash Dump Analyzer 3-34
Partition information dump
  attachment descriptor — Crash Dump Analyzer 3-31
  individual — Crash Dump Analyzer 3-33
  system — Crash Dump Analyzer 3-31
  wait queue — Crash Dump Analyzer 3-31
Partition status flags — Crash Dump Analyzer 3-33
/PASS option — PDP-11 MACRO-11 I-1
Password — Introduction 1-6, Gloss-24; Command Language 3-3 to 3-4
  adding to account entry — System Management 2-3
  changing — MCR Operations 2-24; System Management 2-2, 2-5
  characters — System Management 2-3
  contained in account entry — System Management 2-1
  displaying — System Management 2-4
PASTE buffer — EDT Editor 1-2, 2-1, 6-6
PAste command
  EDI editor — Utilities 2-42
PASTE command (nokeypad) — EDT Editor 2-43, 8-15
PASTE function — EDT Editor 2-12, 5-33
  example with CUT and SELECT — EDT Editor 5-36
PAT utility
  checksum — Utilities 14-6
  command line — Utilities 14-1
  error message — Utilities 14-7
  file
    correction — Utilities 14-3
    input — Utilities 14-3
  Task Builder — Utilities 14-4
  validating file content — Utilities 14-6
Patch
  D-space — Task Builder 11-13
  declaring an object level — Task Builder 11-5
  global relative — Task Builder 11-19
Patch level
  RMSBCK utility — RMS-11 Utilities 6-5
  RMSCNV utility — RMS-11 Utilities 4-9
  RMSDEF utility — RMS-11 Utilities A-5
  RMSDSP utility — RMS-11 Utilities 5-5
  RMSIFL utility — RMS-11 Utilities 3-5
  RMSRST utility — RMS-11 Utilities 7-5
Patching
  object module — Release Notes 1-47
    See also PAT utility
  source file
    See SLP utility
  task image file
    See ZAP utility
Path loading — Task Builder 4-3 to 4-4
  See also Overlays
  example of — Task Builder 4-4
  in autoload — Task Builder 4-3 to 4-4
Pattern
  IOX
    altering test — System Management 4-46

Pattern
  IOX (Cont.)
    displaying test — System Management 4-46
PATTERN command
  IOX — System Management 4-46
/PATTERN switch
  BAD utility — Utilities 6-6
.PAUSE directive — MCR Operations 4-46
  format — MCR Operations 4-46
PC
  value — Program Development 4-8
PC-relative
  location — ODT 2-5, 4-5
  offset — ODT 2-10, 7-2
/PCB — Crash Dump Analyzer 2-2
PCB
  address in DCB — Writing I/O Driver 4-14
PCBDF$ — Crash Dump Analyzer B-31
PCL
  receiver
    device-specifc QIO — I/O Drivers 13-9 to 13-11
    standard QIO — I/O Drivers 13-8
    status return — I/O Drivers 13-11 to 13-12
  transmitter
    device-specifc QIO — I/O Drivers 13-3 to 13-5
    standard QIO — I/O Drivers 13-3
    status return — I/O Drivers 13-6 to 13-8
PCL11
  See PCL
PCL11-B — I/O Drivers 13-1
/PD switch
  RMSCNV utility — RMS-11 Utilities 4-12
  RMSIFL utility — RMS-11 Utilities 3-6 to 3-7, 3-11
$$PDLS
  PSECT — Task Builder 5-52
  reserved PSECT name — Task Builder E-3
PDP-11 — Introduction 5-3, Gloss-3, Gloss-24
PDR — Task Builder 2-16
PDS
  linking
    debugger — ODT 8-2
    ODT — ODT 1-3
Percent sign (%) — Command Language 3-16, 4-7 to 4-8
  See also Wildcard
  in register expression — PDP-11 MACRO-11 5-2
Percent sign (%) operator — ODT 2-7, 4-7
Performance
  See also Speed
  improving TKB — Task Builder F-1
Peripheral device — Introduction 5-1, 5-5, 5-10, Gloss-24; Command Language 5-1
Peripheral Interchange Program
  See PIP
Permanent symbol table — PDP-11 MACRO-11 3-6 to 3-7
  summary — PDP-11 MACRO-11 C-1 to C-7
Personal Printer — I/O Drivers 2-4A
PF command
  EDI editor — Utilities 2-41

Phase 1
  SYSGEN — System Generation (11S) 1-2
Phase 2
  SYSGEN — System Generation (11S) 1-2
Phase I
  description — System Generation (11M) 3-1
  example — System Generation (11M) 4-101
  preperation — System Generation (11M) 4-2
  sections — System Generation (11M) 3-2
Phase II
  description — System Generation (11M) 3-2, 5-1
  example — System Generation (11M) 5-20
  input files
    RSX11M.OLB — System Generation (11M) 5-1
    RSXBLD.CMD — System Generation (11M) 5-1
    SGNPARM.CMD — System Generation (11M) 5-1
    TTDRVBLD.CMD — System Generation (11M) 5-1
  preperation — System Generation (11M) 5-2
  sections — System Generation (11M) 3-3, 5-2
Phase III
  description — System Generation (11M) 3-4, 7-1
  example — System Generation (11M) 7-7
  preperation — System Generation (11M) 7-2
Physical
  address — Task Builder 2-13
    mapped system — Task Builder 2-17
    space — Executive 3-2
Physical device — Command Language 5-1 to 5-3, 5-5, 5-8
Physical device name — Crash Dump Analyzer 3-17
  I/O Drivers 1-18 to 1-20
Physical I/O — I/O Drivers 1-2
Physical memory — Executive 3-4
Physical memory dump switch — Crash Dump Analyzer 2-4
/PI switch — Task Builder 10-31
PIC (Position Independent Code) — PDP-11 MACRO-11 G-1 to G-4
PIP — Introduction 4-2, 4-14
  Command Language B-1
  Program Development 1-8
  asterisk (*) — Program Development 3-10
  cleaning up a UFD — Program Development 3-9 to 3-10
  creating a concatenated object module — Program Development 4-3 to 4-4
  examining listing at terminal — Program Development 3-6, 4-6, 7-4
  /LI — Program Development 3-9
  /ME — Program Development 4-3 to 4-4
  printing listing — Program Development 3-8 to 3-9
  /PU — Program Development 3-10
  /SP — Program Development 3-8
  spooling listing — Program Development 3-8 to 3-9
PIP utility — Command Language 1-17
  account file
    copying — System Management 2-2
    extending — System Management 2-2
  command functions — Utilities 3-8
    copying Files-11 file — Utilities 3-8
    file control — Utilities 3-14
  command line — Utilities 3-1
  error code — Utilities 3-53
  error message — Utilities 3-43
  file
    deleting — Utilities 3-17
    listing — Utilities 3-24
    merging — Utilities 3-9
    protecting — Utilities 3-29
    purging — Utilities 3-31
    renaming — Utilities 3-33

PIP utility
  file (Cont.)
    spooling — Utilities 3-38
  file specification — Utilities 3-1
    default — Utilities 3-1 to 3-2
    wildcard — Utilities 3-7
  subswitch — Utilities 3-14
    description — Utilities 3-6
    merge — Utilities 3-11
    summary — Utilities 3-3
  switch — Utilities 3-14
    description — Utilities 3-5
    summary — Utilities 3-3
  UFD creating — Utilities 3-41
  wildcard — Utilities 3-7
PIP/ENTER command (RMSBCK) — RMS-11 Utilities 6-3
$PKAVL symbol
  use of
    in fault tracing — Writing I/O Driver 3-28
%PKT — Error Logging 5-22
PKTDF$ — Crash Dump Analyzer B-33
PL command
  EDI editor — Utilities 2-41
Placement control — RMS-11 User's Guide 1-17, 1-19
  calculating starting LBN — RMS-11 User's Guide 6-14
  cylinder — RMS-11 User's Guide 6-13 to 6-14
  indexed files — RMS-11 User's Guide 6-13
  RMSBCK utility — RMS-11 Utilities 6-1
  RMSDEF utility — RMS-11 Utilities A-14
  RMSRST utility — RMS-11 Utilities 7-1
  sector — RMS-11 User's Guide 6-14
  track — RMS-11 User's Guide 6-13 to 6-14
PLAS directives
  See Memory management
Platter — RMS-11 Introduction 2-1
/PLCTL keyword
  SET command — MCR Operations 3-190
    VMR — System Management 10-55
PLOCATE command
  EDI editor — Program Development 2-15
Plus operator — PDP-11 MACRO-11 3-4
Plus sign (+) command
  EDT — Introduction 2-13 to 2-14
Plus sign (+) operator — ODT 2-3 to 2-4
/PM switch — Task Builder 10-32
PMD — System Generation (11M) 4-59
  Program Development 1-7
  enabling with TKB — Program Development 5-9
  requesting — MCR Operations 3-4, 3-96, 3-153
    System Management 10-23
.PMD file type — Program Development 5-10
  See also PMD
/PMD keyword
  ABORT command — MCR Operations 3-4
  INSTALL command — MCR Operations 3-96
    VMR — System Management 10-23
  RUN command — MCR Operations 3-153
PMD task
  installation for timely
    operation — Task Builder D-1
PMT
  See also Pool
  aborting — System Management 13-12
    tasks — System Management 13-7 to 13-9,
      13-11 to 13-12
  assembling — System Management 13-1
  checkpointing — System Management 13-5, 13-11

PMT (Cont.)
  internal cycle interval — System Management 13-5, 13-11
  LINE FEED key — System Management 13-8
  message to console
    extreme fragmentation — System Management 13-7
    low pool state — System Management 13-6
  message to terminals
    cycle interval — System Management 13-6
    extreme fragmentation — System Management 13-7
    low pool state — System Management 13-6, 13-11
  modifying — System Management 13-11 to 13-12
  overview — System Management 13-3
  PMTBLD.CMD — System Management 13-10 to 13-12
  pool use controls — System Management 13-5, 13-12
  preventing
    invocation of TKTN — System Management 13-7
    tasks from executing — System Management 13-7
  response
    extreme fragmentation — System Management 13-1, 13-3 to 13-4, 13-7 to 13-10, 13-12
    general fragmentation — System Management 13-3 to 13-4
    pool condition — System Management 13-1, 13-3 to 13-4
    pool state — System Management 13-3 to 13-5
  RETURN key — System Management 13-8
  stopping — System Management 13-5
  Task Builder options — System Management 13-10
  task-building — System Management 13-1
  unstopping — System Management 13-5
PMTBLD.CMD — System Management 13-10 to 13-12
PNC symbolic argument — PDP-11 MACRO-11 6-20
.POINT — I/O Operations 2-9, 4-18
  restrictions — I/O Operations 4-18
Pointer
  See Cursor
Pointer line and error message — EDT Editor A-1
POINTER statement — Error Logging 5-38 to 5-39
/POOL — Crash Dump Analyzer 2-2
Pool — Introduction 5-6, 5-8 to 5-9, Gloss-24

  See also Get-space routine
  allocation failure — System Management 13-2
  buffer descriptor block — RMS-11 Macros 2-8
  condition
    Executive response — System Management 13-1, 13-4
    fluctuation — System Management 13-4
    high — System Management 13-4
    low — System Management 13-4
    PMT response — System Management 13-1, 13-3 to 13-4
    relationship to pool limit — System Management 13-2
  controls
    PMT — System Management 13-5, 13-12
  declaring space — RMS-11 Macros 2-4
  definition — System Generation (11M) 1-3
  description — System Generation (11M) 4-41
  device influence — System Generation (11M) D-4
  event — System Management 13-1
  fragment — System Management 13-2 to 13-5, 13-13
  fragmentation — System Management 13-9
    affecting pool state — System Management 13-3
    extreme — System Management 13-1 to 13-4, 13-7 to 13-10, 13-12
    general — System Management 13-2 to 13-4
    reducing — System Management 13-13

Pool (Cont.)
  free — Crash Dump Analyzer 3-15; System Management 13-2
  free-space list — RMS-11 Macros 2-19
  I/O buffer — RMS-11 Macros 2-6
  index descriptor block — RMS-11 Macros 2-5
  internal FAB — RMS-11 Macros 2-5
  internal RAB — RMS-11 Macros 2-5
  key buffer — RMS-11 Macros 2-6
  largest fragment — Crash Dump Analyzer 3-15
  limit
    See also SET, /PLCTL
    relationship to pool condition — System Management 13-2, 13-4
  monitor code
    See Executive
  monitor interface
    See Executive
  monitoring — System Generation (11M) 4-61; System Management 13-1
  parameters
    setting — MCR Operations 3-190; System Management 10-55
  PMT — System Generation (11M) 4-61
  secondary — Introduction 5-7, Gloss-29
  SET /PLCTL command — System Management 13-2, 13-12 to 13-13
  size
    calculating — System Generation (11M) D-1
    displaying — MCR Operations 3-191; System Management 10-56 to 10-57
    increasing — MCR Operations 3-191; System Management 10-56
    specifying — System Generation (11M) 4-41; System Management 10-57
  smallest possible block — Crash Dump Analyzer 3-15
  state
    affected
      by pool condition — System Management 13-3
      by pool fragmentation — System Management 13-3
    high — System Management 13-11, 13-13
    low — System Management 13-11, 13-13
    overriding Executive notification — System Management 13-5
    PMT response — System Management 13-3 to 13-4
    system transition — System Management 13-4
  task influence — System Generation (11M) D-1
  total free bytes — Crash Dump Analyzer 3-15
Pool dump — Crash Dump Analyzer 3-45
/POOL keyword
  SET command — MCR Operations 3-191
    VMR — System Management 10-56
Pool Monitor Task
  See PMT
Pool statistics dump — Crash Dump Analyzer 3-1, 3-15
POOL$B macro — RMS-11 Macros 2-4, C-2
POOL$E macro — RMS-11 Macros 2-4
  declaring — RMS-11 Macros C-2
Pool-declaration macro — RMS-11 Macros 2-4
  declaring — RMS-11 Macros C-2
/POOLSIZE keyword
  SET command
    VMR — System Management 10-57
Populating indexed files — RMS-11 User's Guide 6-26
  primary key order — RMS-11 User's Guide 6-27
  random insertions — RMS-11 User's Guide 6-28
    bucket fill size — RMS-11 User's Guide 6-28

Populating indexed files
  random insertions (Cont.)
    mass insertion — RMS-11 User's Guide 6-29
POS field in KEY block
  CREATE operation — RMS-11 Macros 5-18
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-68
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-89
POS0 field in KEY block
  offset — RMS-11 Macros 6-68
POS1 field in KEY block
  offset — RMS-11 Macros 6-68
POS2 field in KEY block
  offset — RMS-11 Macros 6-68
POS3 field in KEY block
  offset — RMS-11 Macros 6-68
POS4 field in KEY block
  offset — RMS-11 Macros 6-68
POS5 field in KEY block
  offset — RMS-11 Macros 6-68
POS6 field in KEY block
  offset — RMS-11 Macros 6-68
POS7 field in KEY block
  offset — RMS-11 Macros 6-68
.POSIT — I/O Operations 4-20
POSITION
  RMSDES utility — RMS-11 Utilities 2-46
Position independent code — PDP-11 MACRO-11 G-1 to G-4
/POSITION qualifier
  BRU utility — Utilities 7-20
Positioning
  magtape
    See FB$NEF mask in FOP field
    See FB$POS mask in FOP field
.POSRC — I/O Operations 3-24, 3-29, 4-19
Postmortem Dump — Task Builder D-1
  content — Task Builder D-3 to D-5
  example — Task Builder D-2
  sample — Task Builder D-3 to D-5
  specifying a — Task Builder 10-32
  See also PMD
Power fail
  recovery support — System Generation (11M) 4-29
Power failure entry point — Writing I/O Driver 2-4
  DDT conditions — Writing I/O Driver 4-11
Power-fail recovery — I/O Drivers 1-39
  Release Notes 1-23
  card reader — I/O Drivers 11-4
  DMC11 — I/O Drivers 12-12
  DT07 — I/O Drivers 23-6
  ICS/ICR — I/O Drivers 18-72
  line printer — I/O Drivers 10-5
  magnetic tape — I/O Drivers 8-14
.PPASC — I/O Operations 4-7
/PR switch — Task Builder 6-2, 10-33
  PIP utility — Utilities 3-29
/PR:0 privileged task — Task Builder 6-2, 6-4 to 6-5
/PR:0 privileged task, uses of — Task Builder 6-5
/PR:4 privileged task — Task Builder 6-2, 6-4 to 6-5
/PR:4 privileged task, uses of — Task Builder 6-5
/PR:5 privileged task — Task Builder 6-2, 6-4 to 6-6
/PR:5 privileged task, uses of — Task Builder 6-5

Preceding location
  opening — ODT 4-4
Predefined syntax element
  MML — System Management 12-40
Predefined syntax elements
  MML — System Management 12-39, 12-41 to 12-45
PREPGEN — System Generation (11M) 3-11
  See also MCR inhibit
  Phase I — System Generation (11M) 4-4
  Phase II — System Generation (11M) 5-4
PRG field in PRO block
  CLOSE operation — RMS-11 Macros 5-3
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-108
  OPEN operation — RMS-11 Macros 5-81
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-112
PRI command
  file switches — Batch and Queue 2-3
  format — Batch and Queue 2-3
  job switches — Batch and Queue 2-3
/PRI keyword
  ALTER command — MCR Operations 3-15
    VMR — System Management 10-8
  INSTALL command — MCR Operations 3-96
    VMR — System Management 10-23
  RUN command — MCR Operations 3-154
PRI option — Task Builder 11-27
Primary index
  See also Index
  RMSCNV utility — RMS-11 Utilities 4-1
  RMSIFL utility — RMS-11 Utilities 3-10 to 3-11
Primary key — RMS-11 Introduction 3-7
  RMS-11 User's Guide 1-7, 1-11
  RMSCNV utility — RMS-11 Utilities 4-1, 4-16
  RMSDEF utility
    definition — RMS-11 Utilities A-10
  RMSIFL utility — RMS-11 Utilities 3-5 to 3-6
    sorting — RMS-11 Utilities 3-9
.PRINT
  error handling — I/O Operations 8-2
PRINT command — EDT Editor 7-13
  Introduction 3-7, 6-1 to 6-2
  Batch and Queue 1-3, 2-2
  Command Language 4-52 to 4-61, 9-28 to 9-29
  command qualifiers — Batch and Queue 2-3
  DCL — Program Development 1-12, 3-8
  definition — Batch and Queue Gloss-6
  EDI editor — Utilities 2-17, 2-42
  example — Batch and Queue 2-7
  file qualifiers — Batch and Queue 2-3
  format — Batch and Queue 2-3
  MCR — Program Development 3-9
  processing — Batch and Queue 1-4 to 1-6
.PRINT directive — PDP-11 MACRO-11 7-15
PRINT FORMATTING statement — Error Logging 5-41
  keyword string — Error Logging 5-41 to 5-42
Print head — Introduction 1-1, 1-4, 1-6, 2-5, Gloss-24
Print job
  definition — Batch and Queue Gloss-7
  queued by system tasks
    maps, logs, listings — Batch and Queue 2-12
    PIP — Batch and Queue 2-12
  queued by user tasks

Print job
  queued by user tasks (Cont.)
    .PRINT — Batch and Queue 2-13
    PRINT command — Batch and Queue 2-13
  submission notification — Batch and Queue 2-2
Print line truncation — I/O Drivers 10-7
Print processor — Batch and Queue 1-3
  See also Despooler
  definition — Batch and Queue Gloss-6
/PRINT qualifier
  SHOW QUEUE command — Batch and Queue 2-16
Print Spooling — I/O Operations 8-1
.PRINT subroutine — I/O Operations 8-2
PRINT$
  error handling — I/O Operations 8-2
  error returns — I/O Operations 8-1
  macro — I/O Operations 8-1
Printer — Program Development 1-12; RMS-11 Macros 3-1, 5-20, 5-37, 5-42, 5-77, 5-88, 5-104, 5-111, 5-117
  LA180 — I/O Drivers 10-2
  LN01 — I/O Drivers 10-2
  LP11 — I/O Drivers 10-2
  LS11 — I/O Drivers 10-2
  LV11 — I/O Drivers 10-2
PRINTSUMMARY command
  IOX — System Management 4-47
/PRIO job switch
  QUE /MOD command — Batch and Queue 2-20
/PRIO switch
  PRI command — Batch and Queue 2-5
Priority — Introduction 5-5 to 5-7, Gloss-24 to Gloss-25; Command Language 7-59 to 7-60, 9-33
  definition — Batch and Queue Gloss-7
  task
    declaring — Task Builder 11-27
/PRIORITY job qualifier
  SET QUEUE command — Batch and Queue 2-20
/PRIORITY qualifier
  PRINT command — Batch and Queue 2-5
/PRIV keyword
  SET command — MCR Operations 3-191
    VMR — System Management 10-57
/PRIV subkeyword
  CLI command — MCR Operations 3-38
Private buffer pool
  See BPA field in FAB
  See BPS field in FAB
Private device — Introduction 3-12; Command Language 5-9, 5-13, 5-22 to 5-25
<PRIVIL> symbol — MCR Operations 4-9
Privilege — Introduction 1-22, 5-5, Gloss-25
  terminal — MCR Operations 2-6, 2-18
    specifying — MCR Operations 3-191; System Management 10-57
Privileged and nonprivileged task
  distinction between — Task Builder 6-1
Privileged task — Task Builder 2-25, 6-1
  accessing
    Executive with a — Task Builder 6-4
    I/O page with a — Task Builder 6-4
  building a — Task Builder 6-6 to 6-11
  comparison of nonprivileged and — Task Builder 6-1

Privileged task (Cont.)
  hazards of a — Task Builder 6-1 to 6-2
  in a mapped system — Task Builder 6-1
  logging off from — Task Builder 6-1
  MAC command sequence — Task Builder 6-9
  map of — Task Builder 6-10 to 6-11
  mapping of — Task Builder 6-2 to 6-3
  /PR:0 — Task Builder 6-2, 6-4 to 6-5
  /PR:4 — Task Builder 6-2, 6-4 to 6-5
  /PR:5 — Task Builder 6-2, 6-4 to 6-6
  processor trap in a — Task Builder 6-2
  specifying — Task Builder 2-25
  specifying a — Task Builder 6-2
  TKB command sequence — Task Builder 6-10
  to examine unit control block — Task Builder 6-6 to 6-11
Privileged user — Introduction 5-5, Gloss-25
PRJ field in PRO block
  CLOSE operation — RMS-11 Macros 5-3
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-108
  OPEN operation — RMS-11 Macros 5-81
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-113
PRO block — RMS-11 Introduction 4-8
  chaining to FAB — RMS-11 Macros 2-12 to 2-13
  declaring — RMS-11 Macros 2-8
  initializing — RMS-11 Macros 2-9
  summary — RMS-11 Macros 6-108
PRO field in PRO block
  CLOSE operation — RMS-11 Macros 5-3
  CREATE operation — RMS-11 Macros 5-11
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-108
  OPEN operation — RMS-11 Macros 5-81
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-114
/PRO keyword
  HOME command — MCR Operations 3-73
  INI command — MCR Operations 3-84
  MOUNT command — MCR Operations 3-123
  UFD command — MCR Operations 3-219
PRO macro
  MML — System Management 12-36 to 12-37
PRO/RMS-11
  contrasted with RSTS/E RMS-11 — RMS-11 Macros D-1
  contrasted with RSX-11 RMS-11 — RMS-11 Macros D-3
$PROC
  predefined syntax element in MML — System Management 12-44
PROCEDURE statement — Error Logging 5-33 to 5-34
Proceed
  command — ODT 2-10, 3-2 to 3-3
  count — ODT 2-7, 3-3
PROCEED command
  IOX — System Management 4-48
Process
  state — Writing I/O Driver 2-10
Process control — Introduction 5-2
  asynchronous — I/O Drivers 14-3, 15-16
  synchronous — I/O Drivers 14-3, 15-16
Processing
  RMSBCK utility — RMS-11 Utilities 6-8
    data integrity checking — RMS-11 Utilities 6-9
    explicit/implicit file-spec — RMS-11 Utilities 6-9
    extended diagnostic messages — RMS-11 Utilities 6-10
    summary listing — RMS-11 Utilities 6-10
  RMSCNV utility — RMS-11 Utilities 4-14

Processing
  RMSCNV utility (Cont.)
    input file organization — RMS-11 Utilities 4-16
    output file organization — RMS-11 Utilities 4-15
  RMSDEF utility — RMS-11 Utilities A-1
  RMSIFL utility — RMS-11 Utilities 3-9
    building alternate indexes — RMS-11 Utilities 3-12
    command string checking — RMS-11 Utilities 3-9
    loading output file — RMS-11 Utilities 3-10
    reading and sorting input — RMS-11 Utilities 3-9
    sorting alternate key files — RMS-11 Utilities 3-11
    summary — RMS-11 Utilities 3-1
    terminating — RMS-11 Utilities 3-12
  RMSRST utility — RMS-11 Utilities 7-9
    data integrity checking — RMS-11 Utilities 7-11
    explicit/implicit file-spec — RMS-11 Utilities 7-10
    extended diagnostic messages — RMS-11 Utilities 7-11
    restoration account — RMS-11 Utilities 7-10
    summary listing — RMS-11 Utilities 7-12
Processing blocks — RMS-11 Introduction 4-1, 4-7
  RMS-11 User's Guide 1-20
Processing files — RMS-11 Introduction 4-1
  RMS-11 User's Guide 1-16
  indexed files — RMS-11 User's Guide 7-10
  relative files — RMS-11 User's Guide 4-15
  sequential files — RMS-11 User's Guide 3-15
Processing records — RMS-11 Introduction 4-1, 4-3
  RMS-11 User's Guide 1-10, 1-15
  indexed files — RMS-11 User's Guide 7-2
  relative files — RMS-11 User's Guide 4-7
  sequential files — RMS-11 User's Guide 3-7
Processor
  halting — System Management 8-4
  memory size — System Generation (11M) 4-11
  rotating pattern in data lights — System Generation (11M) 4-33
  valid on RSX-11M — System Generation (11M) 4-10
  with switch register — System Generation (11M) 4-10
Processor priority — Error Logging 4-20
Processor Status Word — Crash Dump Analyzer 3-2
  ODT B-1
  See also PSW
  register — ODT 2-6, 5-3
Program — Introduction Gloss-25
  development step — Task Builder 1-1
  entry point definition — PDP-11 MACRO-11 6-39
  fixed line number — EDT Editor 6-3
  limit — Task Builder A-18
  modularity — PDP-11 MACRO-11 6-43
  section — Task Builder 5-53
    additive displaced relocation — Task Builder A-21
    additive relocation — Task Builder A-20
    adjacency requirement for — Task Builder 10-46
    allocation — Task Builder 2-2
    attribute — Task Builder 2-4
    attribute restriction — Task Builder 2-3
    blank (.BLK) — Task Builder 2-3
    creation — Task Builder 2-3
    displaced relocation — Task Builder A-19
    element — Task Builder 2-2
    extension of — Task Builder 11-14
    in shared region — Task Builder 5-7
    making autoloadable — Task Builder 4-3
    name — Task Builder 2-3
    name conflict — Task Builder 5-7, 5-39 to 5-40
    naming restriction — Task Builder 5-7
    ordering — Task Builder 5-7, 10-36, 10-46
    overlay allocation — Task Builder 3-19

Program
  section (Cont.)
    relocation — Task Builder A-19
    resolution of — Task Builder 3-19
    resolving names — Task Builder 5-7, 5-39 to 5-40
    resolving names in region and task — Task Builder 5-16
    save attribute — Task Builder 2-7
    segregating — Task Builder 10-36, 10-46
    sequential ordering of — Task Builder 10-36, 10-46
    space allocation — Task Builder 2-5 to 2-6
    specifying explicitly in overlay — Task Builder 3-28
    specifying in overlay — Task Builder 3-19
    virtual — Task Builder 5-53
  section name — Task Builder A-7
    applying autoload indicator — Task Builder 4-3
  section name entry — Task Builder A-8
  section name flag byte — Task Builder A-8 to A-9
  sectioning — Program Development 1-4 to 1-5, 2-5, 2-8 to 2-9
  transfer address — PDP-11 MACRO-11 6-39
  user
    breakpoints
      setting — Program Development 5-6
    FORTRAN IV — Program Development 7-3
    library — Program Development 6-1
    macro symbol — Program Development 6-4
      definition placement — Program Development 1-5
    module
      name — Program Development 2-3, 2-5
      version — Program Development 2-5
    object library routines — Program Development 6-6
    overview of development — Program Development 1-13 to 1-14
    section definiton — Program Development 2-8 to 2-9
    system routines — Program Development 1-11
  version
    identification — Task Builder A-10
Program counter — PDP-11 MACRO-11 5-1
  See also PC
  definition — PDP-11 MACRO-11 3-10
Program development
  optimizing — RMS-11 User's Guide 8-9
Program execution
  continuing — ODT 3-2
  resuming — ODT 3-2
Program identification directive — PDP-11 MACRO-11 6-16 to 6-17
Program section
  absolute — PDP-11 MACRO-11 6-42, 6-44 to 6-45
  context saving — PDP-11 MACRO-11 6-47 to 6-48
  creating — PDP-11 MACRO-11 6-43 to 6-44
  directive
    See .PSECT directive
  generated by TPARS — I/O Operations 7-10
  limit on quantity — PDP-11 MACRO-11 6-43
  local symbol block control — PDP-11 MACRO-11 6-19 to 6-20
  named
    in region — Task Builder 5-13
  relocatable — PDP-11 MACRO-11 6-44 to 6-45
  table — PDP-11 MACRO-11 1-1
  virtual
    allocating physical memory to a — Task Builder 5-56
    attaching virtual attribute to a — Task Builder 5-56
    building a task using — Task Builder 5-58 to 5-61

Program section
  virtual (Cont.)
    creating a — Task Builder 5-56, 5-58 to 5-61
    FORTRAN run-time support for — Task Builder 5-56 to 5-57
    option usage — Task Builder 5-55
    specifying — Task Builder 11-38
    specifying base address for a — Task Builder 5-56
    specifying length — Task Builder 5-54
    specifying physical size — Task Builder 5-54
    specifying window size — Task Builder 5-54
    support for a — Task Builder 5-56 to 5-57
Program section naming
  table — System Library 2-3
Program sectioning directive — PDP-11 MACRO-11 6-40 to 6-48
  .ASECT — PDP-11 MACRO-11 6-46 to 6-47
  .CSECT — PDP-11 MACRO-11 6-46 to 6-47
  .PSECT — PDP-11 MACRO-11 6-40 to 6-45
  .RESTORE — PDP-11 MACRO-11 6-47 to 6-48
  .SAVE — PDP-11 MACRO-11 6-47 to 6-48
Program version number
  See Version identifier
Programming
  advanced
    techniques — Program Development 1-6
Programming convention — Writing I/O Driver 2-13
  general — System Library 1-1
Programming protocol — Writing I/O Driver 2-14
  summary — Writing I/O Driver 2-16
Programming standard — PDP-11 MACRO-11 E-1 to E-16
Prologue — RMS-11 Introduction 3-15; RMS-11 User's Guide 1-19
  indexed files — RMS-11 User's Guide 5-2
    bucket size — RMS-11 User's Guide 5-2
  relative files — RMS-11 User's Guide 4-1
Prologue version number
  See PVN field in SUM block
Prompt — Introduction 1-3, 1-11, 2-3, 4-6, 4-11, Gloss-12, Gloss-16 to Gloss-17, Gloss-25; Command Language 1-3, 3-15
  EDT — Introduction 2-3
  explicit — Introduction 1-5, Gloss-12, Gloss-25
  explicit MCR — MCR Operations 1-3
    displaying — MCR Operations 2-16
  implicit — Introduction 1-6, 2-15, Gloss-16 to Gloss-17, Gloss-25
  ODT — ODT 1-4
  RMSBCK utility — RMS-11 Utilities 6-2
  RMSCNV utility — RMS-11 Utilities 4-3
  RMSDES utility — RMS-11 Utilities 2-2
    conditional — RMS-11 Utilities 2-1, 2-13, 2-15, 2-17, 2-29
  RMSDSP utility — RMS-11 Utilities 5-2
  RMSIFL utility — RMS-11 Utilities 3-2
  RMSRST utility — RMS-11 Utilities 7-2
  specifying — MCR Operations 3-36 to 3-37
  task — MCR Operations 2-14
  terminal
    default — MCR Operations 2-14
  type — MCR Operations 2-13
  user-specified — I/O Operations 6-4, 6-10
/PROMPT subkeyword
  CLI command — MCR Operations 3-38
Prompting
  CLI — System Management 11-7 to 11-9

$PRONC
  predefined syntax element in
    MML — System Management 12-44
PROTECTION
  RMSDES utility — RMS-11 Utilities 2-33
Protection — RMS-11 User's Guide 1-18
  file — Introduction 3-6, 5-6, Gloss-25 to Gloss-26; Command Language 2-6, 4-79 to 4-82, 5-28, 5-38, 5-51, 5-58, 9-33; System Management 2-2
    See also PRO field in PRO block
  multiuser — System Generation (11M) 4-26
  RMSDEF utility — RMS-11 Utilities A-18
  RMSRST utility — RMS-11 Utilities 7-7
  volume — Command Language 5-31, 5-38, 5-52, 5-58
  XAB
    See PRO block
Protection code
  file
    PIP utility — Utilities 3-26
/PROTECTION qualifier
  BRU utility — Utilities 7-20
Prototype ODL file — RMS-11 User's Guide 8-3
Prototype task
  batch processor — System Management 7-1
  despool — System Management 7-1
PRS2AM — Error Logging 4-4
PRS2BM — Error Logging 4-4
PRT print spooler — System Generation (11M) 4-60
PRT... — System Management 7-7
PSECT — I/O Operations 7-10
  See also Program section
.PSECT directive — PDP-11 MACRO-11 3-11, 6-40 to 6-45; Program Development 2-8 to 2-9; Task Builder 3-28
  See also Program section
  symbolic argument — PDP-11 MACRO-11 6-40 to 6-42
PSECT name
  .FCTR directive
    argument — Task Builder 3-25
Pseudo device — Introduction 3-8, Gloss-26; Command Language 5-1 to 5-8
  CL: — Command Language 5-6
  CO: — Command Language 5-6
  LB: — Command Language 5-6
  name — I/O Drivers 1-21
  NL: — Command Language 5-6
  SY: — Command Language 4-2, 4-77 to 4-79, 5-6, 5-72 to 5-73, 9-31
  TI: — Command Language 5-7
  WK: — Command Language 5-6
PSW — Executive 1-2
$PTBYT routine — Writing I/O Driver 5-21
.PTLUN
  reserved global symbol — Task Builder E-2
$PTWRD routine — Writing I/O Driver 5-22
  conditional assembly — Writing I/O Driver 5-1
  inclusion of
    by SYSGEN — Writing I/O Driver 3-2
/PU switch
  PIP utility — Utilities 3-31

/PUB keyword
  MOUNT command — MCR Operations 3-123
  SET command — MCR Operations 3-192
    VMR — System Management 10-57
Public device — Command Language 5-9, 5-13, 5-75
Punched card — I/O Drivers 11-1
PURGE command — Introduction 3-9 to 3-10; Command Language 4-34 to 4-37, 9-29
  DCL — Program Development 3-9
PUT argument to ORG$ macro — RMS-11 Macros 2-3
$PUT macro
  key access — RMS-11 Macros 5-95
  sequential access — RMS-11 Macros 5-91
PUT operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15; RMS-11 Macros 4-10
  access modes — RMS-11 Introduction 4-6
  and key position — RMS-11 User's Guide 6-7
  and ODLs — RMS-11 User's Guide 8-5
  and shared access — RMS-11 User's Guide 2-6
  and stream records — RMS-11 User's Guide 2-17
  declaring with ORG$ macro — RMS-11 Macros 2-3
  deferred write — RMS-11 User's Guide 7-9
  duplicate keys — RMS-11 User's Guide 6-9
  indexed files — RMS-11 User's Guide 7-5, 7-9
    key access — RMS-11 User's Guide 5-10, 7-6
    mass insertion — RMS-11 User's Guide 7-9
    sequential access — RMS-11 User's Guide 5-17, 7-6
  initial allocation — RMS-11 User's Guide 4-4
  key access — RMS-11 User's Guide 1-16
  locate mode — RMS-11 User's Guide 3-14
  move mode
    indexed files — RMS-11 User's Guide 7-7
    relative files — RMS-11 User's Guide 4-12
    sequential files — RMS-11 User's Guide 3-13
  optimizing — RMS-11 User's Guide 6-7
  $PUT macro
    key access — RMS-11 Macros 5-95
    sequential access — RMS-11 Macros 5-91
  relative files — RMS-11 User's Guide 4-11
    key access — RMS-11 User's Guide 4-11
    sequential access — RMS-11 User's Guide 4-11
  sequential access — RMS-11 User's Guide 1-16
  sequential files — RMS-11 User's Guide 3-10
    key access — RMS-11 User's Guide 3-10
    sequential access — RMS-11 User's Guide 3-10
PUT statement — Error Logging 4-31, 5-39
PUT$ — I/O Operations 3-24
  FDB — I/O Operations 3-26
  locate mode — I/O Operations 3-24, 3-27
  move mode — I/O Operations 3-24, 3-26
  random mode — I/O Operations 3-24
PUT$ macro call
  format — I/O Operations 3-25
  parameters — I/O Operations 3-25
PUT$R — I/O Operations 3-28
PUT$R macro call
  format — I/O Operations 3-29
  parameters — I/O Operations 3-29
PUT$S — I/O Operations 3-30
PUT$S format
  See PUT$
PVN field in SUM block
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-145
  OPEN operation — RMS-11 Macros 5-81

PVN field in SUM block (Cont.)
  summary — RMS-11 Macros 6-151
PWRUP routine — Executive 5-54

Q

Q error — PDP-11 MACRO-11 3-16, 6-28 to 6-29, 6-33, 6-37, 7-8
  summary — PDP-11 MACRO-11 D-4
Q register — ODT 2-6, 4-1, 5-3, 7-2 to 7-3
  indicator — ODT 2-3, 2-10, 7-3
$QERMV — Error Logging 4-25
$QINSP routine — Writing I/O Driver 5-23
QIO — I/O Drivers 1-16
  $C form — I/O Drivers 1-15
  device-independent — I/O Drivers C-1
  device-specific
    A/D converter — I/O Drivers 14-2 to 14-3
    card reader — I/O Drivers 11-3
    cassette — I/O Drivers 9-3
    DECtape — I/O Drivers 6-3
    disk — I/O Drivers 5-7 to 5-8
    DT07 — I/O Drivers 23-4 to 23-6
    graphic display driver — I/O Drivers 20-2
    ICS/ICR — I/O Drivers 18-8 to 18-12
    laboratory peripheral system — I/O Drivers 16-3 to 16-9
    LPA11-K — I/O Drivers 21-27 to 21-29
    magnetic tape — I/O Drivers 8-4 to 8-9
    message-oriented communication — I/O Drivers 12-5 to 12-7
    PCL receiver — I/O Drivers 13-9 to 13-11
    PCL transmitter — I/O Drivers 13-3 to 13-5
    RA80 — I/O Drivers 5-8
    terminal — I/O Drivers 2-8 to 2-10, 3-5 to 3-6
    TU58 — I/O Drivers 7-3 to 7-4
    UDC11 — I/O Drivers 15-3 to 15-9
  diagnostic — System Generation (11M) 4-27
  $ form — I/O Drivers 1-14
  function summary — I/O Drivers A-1
  macro format — I/O Drivers 1-9
  $S form — I/O Drivers 1-15
  standard
    A/D converter — I/O Drivers 14-2
    card reader — I/O Drivers 11-2
    cassette — I/O Drivers 9-2
    DECtape — I/O Drivers 6-2
    disk — I/O Drivers 5-5 to 5-7
    DT07 — I/O Drivers 23-2 to 23-3
    graphic display driver — I/O Drivers 20-2
    ICS/ICR — I/O Drivers 18-8 to 18-12
    laboratory peripheral system — I/O Drivers 16-2
    line printer — I/O Drivers 10-3
    magnetic tape — I/O Drivers 8-4
    message-oriented communication — I/O Drivers 12-5
    paper tape — I/O Drivers 17-2
    PCL receiver — I/O Drivers 13-8
    PCL transmitter — I/O Drivers 13-3
    terminal — I/O Drivers 2-7
    TU58 — I/O Drivers 7-2 to 7-3
    UDC11 — I/O Drivers 15-3
  summary of form — I/O Drivers 1-14
QIO directive
  position of
    in I/O hierarchy — Writing I/O Driver 2-2
  preinitiation processing of — Writing I/O Driver 2-11

QIO directive (Cont.)
  role of
    in I/O processing — Writing I/O Driver 2-3
QIO Directive Parameter Block — Writing I/O Driver 4-6
QIO function
  executing — I/O Operations 4-20
QIO packets
  pre-allocated — System Generation (11M) 4-37
QIO$ — Executive 5-112
QIO$ directive — I/O Operations 2-41 to 2-42
QIOW$ — Executive 5-116
I/O Drivers 1-16
QMG — Batch and Queue 1-1
Command Language 1-16, 4-52, 9-44, 9-46, B-1
Program Development 1-12
System Management 7-1
  definition — Batch and Queue Gloss-7
  dequeuing jobs — Batch and Queue 2-1
  output — Batch and Queue 1-3
  queuing jobs — Batch and Queue 2-1
  special applications — Batch and Queue 1-2
  stopping
    using SHUTUP — System Management 8-4
  suppress messages from
    using DCL — Release Notes 1-36
    using MCR — Release Notes 1-36
QMGCLI — System Management 7-1 to 7-2
$QRMVF routine — Writing I/O Driver 5-24
  use of
    with ACP — Writing I/O Driver D-6
QUA macro
  MML — System Management 12-37 to 12-38
Qualifier — Introduction 2-3, Gloss-27
  BRU utility — Utilities 7-12
  command — Introduction 2-3, Gloss-7, Gloss-27
  command file — EDT Editor 4-1
  DCL — EDT Editor 4-2
Command Language 1-3 to 1-5
    list — EDT Editor 4-3
  example — EDT Editor 4-7
  filespec — Introduction Gloss-15, Gloss-27
  floating — Command Language 1-3 to 1-5
  purpose — EDT Editor 4-1
Qualifier, MACRO command — PDP-11 MACRO-11 8-8
Quantity register — ODT 2-6, 5-3, 7-3
  indicator — ODT 2-10, 7-3
QUE /AS command
  MCR — System Management 7-8, 7-12, 7-22
QUE /CR command
  MCR — System Management 7-4, 7-11, 7-13
QUE /DEA command
  MCR — System Management 7-22
QUE /DEL command
  format — Batch and Queue 2-10
  MCR — System Management 7-19
QUE /DEL:Q command
  MCR — System Management 7-20
QUE /HO command
  format
    entry number — Batch and Queue 2-22
    job name — Batch and Queue 2-22
QUE /KIL command
  MCR — System Management 7-25
QUE /LI command — Batch and Queue 2-14
  batch queue — Batch and Queue 1-9

QUE /LI command (Cont.)
  display — Batch and Queue 2-16 to 2-17
  format — Batch and Queue 2-15
  print queue — Batch and Queue 1-9
  QUE /LI display — Batch and Queue 1-10
  switches — Batch and Queue 2-15
QUE /LI:DEV command
  format — Batch and Queue 2-18
QUE /MOD command
  example — Batch and Queue 2-21
  file format
    switches — Batch and Queue 2-19
  job format
    switches — Batch and Queue 2-19
QUE /REL command
  format
    entry number — Batch and Queue 2-23
    job name — Batch and Queue 2-23
QUE /SP command
  DCL — System Management 7-18
  MCR — System Management 7-6, 7-13 to 7-17, 7-19
    /FO keyword — System Management 7-17
QUE /STA command
  MCR — System Management 7-26 to 7-31
QUE /STA:QMG command
  MCR — System Management 7-3, 7-26 to 7-27
QUE /STO command
  MCR — System Management 7-23 to 7-25
QUE /STO:QMG command
  MCR — System Management 7-23
QUE /STO:QUE command
  MCR — System Management 7-23
QUE /UNSP command
  MCR — System Management 7-20 to 7-22
Query mode
  RMSBCK utility — RMS-11 Utilities 6-5 to 6-7, 6-10
  RMSRST utility — RMS-11 Utilities 7-6 to 7-8, 7-11
QUERY qualifier — EDT Editor 7-3, 7-17
  MOVE — EDT Editor 7-12
Question
  default response — System Generation (11M) 3-6
    examples — System Generation (11M) 3-6
  format — System Generation (11M) 3-5
  logical order — System Generation (11M) 3-7
Question mark (?)
  ODT — Program Development 5-3
Question mark (?) symbol — ODT A-1
Queue — Batch and Queue 1-1
  assignments — Batch and Queue 1-2
  clock — Command Language 7-12 to 7-15, 7-23, 7-60, 9-37
  definition — Batch and Queue Gloss-7
  device
    definition — Batch and Queue Gloss-3
  device-specific — Batch and Queue 1-2, Gloss-3
  disk file
    definition — Batch and Queue Gloss-7
  disk file (QUEUE.SYS)
    RSX-11M — Batch and Queue 1-1
  displaying information — Batch and Queue 2-1
  general — Batch and Queue 1-2, Gloss-5
  job
    holding — Batch and Queue 2-1
    releasing — Batch and Queue 2-1
    status

Queue
  job
    status (Cont.)
      altering — Batch and Queue 2-1
  PRINT
    definition — Batch and Queue Gloss-7
Queue I/O and Wait
  See QIOW$
Queue I/O Request
  See QIO
Queue I/O Request And Wait
    directive — Executive 5-116
Queue I/O Request directive — Executive 5-112
Queue Manager
    See QMG
Queue manager — System Generation (11M) 4-35
/QUEUE:queuename qualifier
  PRINT command — Batch and Queue 2-4
Queuename parameter
  DELETE command — Batch and Queue 2-10
Queuename switch
  PRI command — Batch and Queue 2-4
Quiet mode — MCR Operations 4-33
/QUIET subkeyword
  CLI command — MCR Operations 3-38
QUIT command — EDT Editor 5-9, 5-21, 7-14, 8-15
  EDT — Introduction 2-14 to 2-15
  keypad editing — EDT Editor 2-20, 5-9
  line editing — EDT Editor 7-14
  nokeypad editing — EDT Editor 8-15
  RMSDES utility — RMS-11 Utilities 2-2, 2-12, 2-18
QUIT/SAVE
  example — EDT Editor 3-4
  line editing — EDT Editor 7-14
  RECOVER qualifier — EDT Editor 3-2
  simulate system failure — EDT Editor 3-2
Quotation mark
  command line with — MCR Operations 1-2
  EDT — Introduction 2-13 to 2-14
Quotation mark (") operator — ODT 2-7, 4-6
Quote character — PDP-11 MACRO-11 6-25
Quoted string
  file specification — RMS-11 User's Guide A-5
  remote file specification — RMS-11 User's Guide B-2
QUPKT — Error Logging 4-24

R

R command — EDT Editor 8-15; ODT 2-10
  ZAP utility — Utilities 15-18
R error — PDP-11 MACRO-11 3-10
  summary — PDP-11 MACRO-11 D-4
^R operator — PDP-11 MACRO-11 3-5, 6-30
R register — ODT 2-7, 5-5 to 5-6
/R switch — Error Logging 2-4, 2-7, 3-6, 3-20
R$-family macro — RMS-11 Macros 2-9
  declaring — RMS-11 Macros C-2
/R5 switch
  DMP utility — Utilities 11-7
$R50
  predefined syntax element in
      MML — System Management 12-41
/RA switch
  RMSBCK utility — RMS-11 Utilities 6-6 to 6-7, 6-9

/RA switch (Cont.)
  RMSRST utility — RMS-11 Utilities 7-7, 7-11
RA60 — I/O Drivers 5-4
RA60/80/81, RC25 tape kit
  copying
    on-line — System Generation (11M) 2-32
    stand-alone — System Generation (11M) 2-6
RA80 — I/O Drivers 5-4
RA81 — I/O Drivers 5-4
RAB — RMS-11 Introduction 4-8
  declaring — RMS-11 Macros 2-8
  initializing — RMS-11 Macros 2-9
  summary — RMS-11 Macros 6-115
RAB$B macro — RMS-11 Macros 2-8, C-2
RAB$BT macro — RMS-11 Macros C-2
RAB$E macro — RMS-11 Macros 2-9
  declaring — RMS-11 Macros C-2
RABOF$ macro — RMS-11 Macros C-2
RAC field in RAB — RMS-11 Macros 4-4 to 4-6
  FIND operation — RMS-11 Macros 5-49, 5-51, 5-54
  GET operation — RMS-11 Macros 5-60, 5-63, 5-67
  offset — RMS-11 Macros 6-115
  PUT operation — RMS-11 Macros 5-91, 5-95
  summary — RMS-11 Macros 6-127
.RAD50 directive — PDP-11 MACRO-11 6-29 to 6-30
<RAD50> symbol — MCR Operations 4-9
Radix control — PDP-11 MACRO-11 3-14, 6-31, 6-33
  temporary operator — PDP-11 MACRO-11 6-31 to 6-32
Radix default — PDP-11 MACRO-11 3-14
.RADIX directive — PDP-11 MACRO-11 3-14, 6-32 to 6-33
Radix-50 — Command Language A-1
  character set — ODT 7-4
    PDP-11 MACRO-11 A-4 to A-5
  displaying — ODT 4-6 to 4-7
  evaluation — ODT 7-4
  operator (%) — ODT 2-7, 4-6 to 4-7
  separator (*) — ODT 2-5, 7-4
  temporary operator — PDP-11 MACRO-11 6-30
Radix-50 conversion
  ASCII to Radix-50 ($CAT5) — System Library 4-6
  ASCII with blanks to Radix-50 ($CAT5B) — System Library 4-8
  Radix-50 to ASCII ($C5TA) — System Library 5-11
Random access — Introduction 5-11 to 5-12, Gloss-27
    RMS-11 Introduction 2-4
    RMS-11 User's Guide 1-7, 1-9
  by key — RMS-11 Introduction 3-12
    RMS-11 User's Guide 1-12
    FIND — RMS-11 User's Guide 1-16
    GET — RMS-11 User's Guide 1-16
    match criterion — RMS-11 Introduction 3-12
    PUT — RMS-11 User's Guide 1-16
  by RFA — RMS-11 Introduction 3-11
    RMS-11 User's Guide 1-12
    FIND — RMS-11 User's Guide 1-16
    GET — RMS-11 User's Guide 1-16
  by VBN — RMS-11 Introduction 3-12
    RMS-11 User's Guide 1-20
  match criteria — RMS-11 User's Guide 5-13
  to indexed files — RMS-11 User's Guide 5-7, 5-9, 6-12
  to relative files — RMS-11 User's Guide 4-1
  to sequential files — RMS-11 User's Guide 3-2
RANDOM command
  IOX — System Management 4-49

Random mode — I/O Operations 3-22
Range
  contiguous line — EDT Editor 6-10
  EDT — Introduction 2-5 to 2-9, 2-11 to 2-14
  MOVE command — EDT Editor 7-11
  noncontiguous — EDT Editor 6-11
  SELECT function — EDT Editor 5-33
  single line — EDT Editor 6-7 to 6-8
  specifiers for noncontiguous — EDT Editor 6-11
  Trace program — ODT 8-2
RANGE command
  IOX — System Management 4-50
Range specification — EDT Editor 2-23
  ALL — EDT Editor 6-11
  AND — EDT Editor 6-11
  BEFORE — EDT Editor 6-10
  BEGIN — EDT Editor 6-8
  contiguous line — EDT Editor 6-10
  description — EDT Editor 6-7
  END — EDT Editor 6-8
  FOR — EDT Editor 6-10
  for text buffer — EDT Editor 6-11
  LAST — EDT Editor 6-8
  noncontiguous line — EDT Editor 6-11
  number — EDT Editor 6-8
  ORIGINAL number — EDT Editor 6-8
  period (.) — EDT Editor 6-8
  REST — EDT Editor 6-10
  string — EDT Editor 6-8
  THRU — EDT Editor 2-30, 6-10
  WHOLE — EDT Editor 2-22, 6-10
RAT field in FAB
  CREATE operation — RMS-11 Macros 5-11 to 5-12
  offset — RMS-11 Macros 6-23
  OPEN operation — RMS-11 Macros 5-78
  summary — RMS-11 Macros 6-59
    FB$BLK mask — RMS-11 Macros 6-60
RATE command
  RMD — System Management 6-8 to 6-9, 6-11 to 6-12A
RB$-family symbol
  declaring — RMS-11 Macros C-2
RB$ASY mask in ROP field — RMS-11 Macros 4-1
  CONNECT operation — RMS-11 Macros 5-7
  DELETE operation — RMS-11 Macros 5-25
  DISCONNECT operation — RMS-11 Macros 5-27
  FIND operation — RMS-11 Macros 5-49, 5-51, 5-54
  FLUSH operation — RMS-11 Macros 5-56
  FREE operation — RMS-11 Macros 5-58
  GET operation — RMS-11 Macros 5-60, 5-63, 5-67
  NXTVOL operation — RMS-11 Macros 5-70
  PUT operation — RMS-11 Macros 5-91, 5-95
  READ operation — RMS-11 Macros 5-98, 5-100
  REWIND operation — RMS-11 Macros 5-114
  RSTS/E — RMS-11 Macros D-4
  SPACE operation — RMS-11 Macros 5-120
  summary — RMS-11 Macros 6-131
  TRUNCATE operation — RMS-11 Macros 5-122
  UPDATE operation — RMS-11 Macros 5-124
  value — RMS-11 Macros 6-115
  WRITE operation — RMS-11 Macros 5-127, 5-129
RB$BID code in BID field
  summary — RMS-11 Macros 6-116
  value — RMS-11 Macros 6-115
RB$BLL code in BLN field
  RSTS/E — RMS-11 Macros D-4

RB$BLL code in BLN field (Cont.)
  value RMS-11 Macros 6-115
RB$BLN code in BLN field
  value RMS-11 Macros 6-115
RB$EOF mask in ROP field
  CONNECT operation RMS-11 Macros 5-7
  summary RMS-11 Macros 6-132
  value RMS-11 Macros 6-115
RB$FDL mask in ROP field
  DELETE operation RMS-11 Macros 5-25
  summary RMS-11 Macros 6-133
  value RMS-11 Macros 6-115
RB$KEY code in RAC field RMS-11 Macros 4-5
  FIND operation RMS-11 Macros 5-51
  GET operation RMS-11 Macros 5-63
  PUT operation RMS-11 Macros 5-95
  value RMS-11 Macros 6-115
RB$KGE mask in ROP field RMS-11 Macros 4-5 to 4-6
  FIND operation RMS-11 Macros 5-52
  GET operation RMS-11 Macros 5-64
  summary RMS-11 Macros 6-134
  value RMS-11 Macros 6-115
RB$KGT mask in ROP field RMS-11 Macros 4-5 to 4-6
  FIND operation RMS-11 Macros 5-52
  GET operation RMS-11 Macros 5-64
  summary RMS-11 Macros 6-135
  value RMS-11 Macros 6-115
RB$LOA mask in ROP field
  PUT operation RMS-11 Macros 5-92, 5-96
  summary RMS-11 Macros 6-136
  UPDATE operation RMS-11 Macros 5-124
  value RMS-11 Macros 6-115
RB$LOC mask in ROP field RMS-11 Macros 4-7
  CONNECT operation RMS-11 Macros 5-6
  GET operation RMS-11 Macros 5-61, 5-64, 5-68
  PUT operation RMS-11 Macros 5-92
  summary RMS-11 Macros 6-137
  value RMS-11 Macros 6-115
RB$MAS mask in ROP field
  PUT operation RMS-11 Macros 5-92
  summary RMS-11 Macros 6-138
  value RMS-11 Macros 6-115
RB$RFA code in RAC field RMS-11 Macros 4-6
  FIND operation RMS-11 Macros 5-54
  GET operation RMS-11 Macros 5-67
  value RMS-11 Macros 6-115
RB$SEQ code in RAC field RMS-11 Macros 4-4
  FIND operation RMS-11 Macros 5-49
  GET operation RMS-11 Macros 5-60
  PUT operation RMS-11 Macros 5-91
  value RMS-11 Macros 6-115
RB$UIF mask in ROP field RMS-11 Macros 4-4
  PUT operation RMS-11 Macros 5-92, 5-96
  summary RMS-11 Macros 6-139
  value RMS-11 Macros 6-115
$RBCAL macro RMS-11 Macros C-3
RBF field in RAB RMS-11 Macros 4-7, 4-13
  CONNECT operation RMS-11 Macros 5-7
  GET operation RMS-11 Macros 5-61, 5-65, 5-68
  offset RMS-11 Macros 6-115
  PUT operation RMS-11 Macros 5-92 to 5-93, 5-95
  READ operation RMS-11 Macros 5-99, 5-101
  summary RMS-11 Macros 6-128
  UPDATE operation RMS-11 Macros 5-124
  WRITE operation RMS-11 Macros 5-127, 5-129
/RC switch
  DMP utility Utilities 11-7

/RC switch (Cont.)
  RMSBCK utility — RMS-11 Utilities 6-7, 6-9
  RMSRST utility — RMS-11 Utilities 7-8, 7-11
  VFY utility — Utilities 9-7
RC25 — I/O Drivers 5-4A
RC25 disk kit
  copying
    on-line — System Generation (11M) 2-34
    stand-alone — System Generation (11M) 2-9
RCML$ — I/O Operations 6-9, 6-12
RCST$ — Executive 5-118
RCT — System Management 5-1
  bad block
    detection — System Management 5-3
    notification — System Management 5-3
    replacement — System Management 5-3
    replacement completion — System Management 5-4
    revectoring — System Management 5-4
  installing — System Management 5-2
  logical block — System Management 5-2
  recovery techniques for disks — System Management 5-1
  relationship
    Error Logger — System Management 5-5
    RSX-11M utilities — System Management 5-5
  replacement block — System Management 5-2
    primary — System Management 5-4
    secondary — System Management 5-4
RCVD$ — Executive 5-120
RCVX$ — Executive 5-122
/RD switch
  RMSBCK utility — RMS-11 Utilities 6-8 to 6-9
RD51 — I/O Drivers 5-4A
RDAF$ — Executive 5-125
RDB — Executive 3-11 to 3-12
  assigned setting — Executive 3-19
  generating — Executive 3-12 to 3-13
  generating in FORTRAN — Executive 3-14
  macros — Executive 3-12 to 3-13
RDBBK$ — Executive 3-12
  macro call — Executive 3-13
  macro expansion — Executive 3-13
RDBDF$ — Executive 3-12
.RDFDR — I/O Operations 4-2
.RDFFP — I/O Operations 4-5
.RDFUI — I/O Operations 4-4
$RDPAG (Read page) — System Library 8-26
$$RDSG
  PSECT — Task Builder 5-52
  reserved PSECT name — Task Builder E-3
RDT field in DAT block
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-14
  OPEN operation — RMS-11 Macros 5-81
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-20
RDXF$ — Executive 5-127
/RE job switch
  QUE /MOD command — Batch and Queue 2-21
/RE switch
  PIP utility — Utilities 3-33
  VFY utility — Utilities 9-7
REA command — MCR Operations 3-143
  VMR — System Management 10-32
Read — Introduction Gloss-27
  from console terminal — System Management 3-3
  nondestructive
    NFS volumes — System Management 4-62

Read access — MCR Operations 2-3
Read All Event Flags directive — Executive 5-125
REAd command
  EDI editor — Utilities 2-42
.READ directive — MCR Operations 4-47
  example — MCR Operations 4-47
  format — MCR Operations 4-47
Read Extended Event Flags
    directive — Executive 5-127
Read logical record
  locate mode — I/O Operations 3-18
  move mode — I/O Operations 3-18
  random mode — I/O Operations 3-24
$READ macro
  sequential access — RMS-11 Macros 5-98
  VBN access — RMS-11 Macros 5-100
Read Only qualifier
  READ_ONLY (DCL) — EDT Editor 4-4
  RO (MCR) — EDT Editor 4-7
READ operation — RMS-11 Introduction 4-7; RMS-11 Macros 4-14
  access modes — RMS-11 Introduction 4-7
  $READ macro
    sequential access — RMS-11 Macros 5-98
    VBN access — RMS-11 Macros 5-100
Read virtual block — I/O Operations 3-30
READ$ — I/O Operations 3-30
  FDB — I/O Operations 3-34
READ$ macro call
  format — I/O Operations 3-31
  parameters — I/O Operations 3-31 to 3-33
Read-ahead multiple buffering — I/O Operations 1-7, 2-18
Read-only
  access declaration — RMS-11 User's Guide 2-6
  sharing declaration — RMS-11 User's Guide 2-7
Read-only access — PDP-11 MACRO-11 6-40
Read-pass-all option — MCR Operations 3-195; System Management 10-58
Read/write
  access declaration — RMS-11 User's Guide 2-6
  sharing declaration — RMS-11 User's Guide 2-7
Read/write access — PDP-11 MACRO-11 6-40
Readable-block context — RMS-11 Macros 4-12
Ready recovery
  card reader — I/O Drivers 11-4
  paper tape — I/O Drivers 17-4
Ready-to-run task — Introduction Gloss-33; Command Language 7-1
Real-time system — Introduction 5-1, 5-6, Gloss-28
REASSIGN command — MCR Operations 3-143
  command line format — MCR Operations 3-143
  error message — MCR Operations 3-143
  example — MCR Operations 3-143
  VMR — System Management 10-32
    command line format — System Management 10-32
    example — System Management 10-32
Receive By Reference directive — Executive 5-136
Receive Data directive — Executive 5-120
Receive Data Or Exit directive — Executive 5-122
Receive Data Or Stop directive — Executive 5-118
Receive error
  hard — I/O Drivers 2-36
Record — RMS-11 Introduction 1-1; RMS-11 User's Guide 1-1
  See also Record format
  access mode — RMS-11 Introduction 3-11, 3-13
    See also Access mode

Record
  access mode (Cont.)
    See also RAC field in RAB
    key — RMS-11 Introduction 3-12
    RFA — RMS-11 Introduction 3-11
    sequential — RMS-11 Introduction 3-11
  blocked
    See FB$BLK mask in RAT field
  buffer address
    See RBF field in RAB
  data — RMS-11 Introduction 3-7; RMS-11 User's Guide 5-2
  deleting
    See DELETE operation
  deleting, fast
    See RB$FDL mask in ROP field
  fast deletion
    See RB$FDL mask in ROP field
  format
    See RFM field in FAB
  index — RMS-11 Introduction 3-7; RMS-11 User's Guide 5-2, 5-6
  locating
    See FIND operation
  longest
    See LRL field in FAB
  processing — RMS-11 Introduction 4-1, 4-3; RMS-11 User's Guide 1-15
  reading — MCR Operations 4-47
    See GET operation
  replacing
    See UPDATE operation
  size
    See RSZ field in RAB
  update existing
    See RB$UIF mask in ROP field
  writing
    See PUT operation
Record access — RMS-11 User's Guide 1-12
  See also Shared access
Record access block
  See RAB field in RAB
Record access byte
  initializing — I/O Operations 2-9
Record access mode — RMS-11 Macros 4-4
Record access section of FDB — I/O Operations 2-8
Record attribute — I/O Operations 2-6
Record attribute byte — I/O Operations 2-6
Record context — RMS-11 Macros 4-3
Record file address
  See RFA
  See RFA field in RAB
Record format — RMS-11 Introduction 3-1; RMS-11 User's Guide 1-11, 1-18
  and file organizations — RMS-11 User's Guide 1-20, 2-15
  fixed-length — RMS-11 Introduction 3-2; RMS-11 User's Guide 1-11, 2-15
  indexed files — RMS-11 User's Guide 6-1
  relative files — RMS-11 User's Guide 4-2
  RMSCNV utility — RMS-11 Utilities 4-14
  RMSDEF utility — RMS-11 Utilities A-8
  sequential files — RMS-11 User's Guide 3-3
  stream — RMS-11 Introduction 3-4; RMS-11 User's Guide 1-11, 2-16
  undefined — RMS-11 Introduction 3-4; RMS-11 User's Guide 1-11, 2-17

Record format (Cont.)
  variable-length — RMS-11 Introduction 3-2; RMS-11 User's Guide 1-11, 2-15
    and medium — RMS-11 User's Guide 2-15
  VFC — RMS-11 Introduction 3-2; RMS-11 User's Guide 1-11, 2-16
Record I/O
  contrast to block I/O — I/O Operations 1-5
  data flow during — I/O Operations 1-3
  multiple buffered — I/O Operations 3-10
  multiple buffering — I/O Operations 1-6
  random access mode — I/O Operations 1-5
  sequential access mode — I/O Operations 1-5
Record I/O operations — I/O Operations 3-24
Record length
  longest
    See LRL field in FAB
  maximum
    See MRL field in FAB
Record Management Services
  See RMS-11
Record number
  maximum
    See MRN field in FAB
Record operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15; RMS-11 Macros 4-9
  See also Operation
Record operation macro
  declaring — RMS-11 Macros C-3
  $DELETE — RMS-11 Macros 5-25
  $FIND — RMS-11 Macros 5-49, 5-51, 5-54
  $GET — RMS-11 Macros 5-60, 5-63, 5-67
  $PUT — RMS-11 Macros 5-91, 5-95
  $TRUNCATE — RMS-11 Macros 5-122
  $UPDATE — RMS-11 Macros 5-124
Record processing — RMS-11 Macros 4-3
Record reference vector
  See RRV
Record size — I/O Operations 2-6; RMS-11 User's Guide 1-18
  indexed files — RMS-11 User's Guide 6-1
  relative files — RMS-11 User's Guide 4-2
  sequential files — RMS-11 User's Guide 3-2
  UPDATE operation — RMS-11 User's Guide 2-16
Record stream — RMS-11 Macros 4-3
Record transfer mode — RMS-11 Introduction 4-6
  indexed files — RMS-11 User's Guide 7-6
  locate mode — RMS-11 Introduction 4-6
  move mode — RMS-11 Introduction 4-6
  relative files — RMS-11 User's Guide 4-12
  sequential files — RMS-11 User's Guide 3-13
Record type
  R.FIX — I/O Operations 2-5
  R.SEQ — I/O Operations 2-6
  R.VAR — I/O Operations 2-6
Record-oriented device — Introduction 5-10 to 5-11, Gloss-28
  See also FB$REC mask in DEV field
Record-output characteristic
  See RAT field in FAB
Record-output handling — RMS-11 User's Guide 1-19
RECORDS command
  IOX — System Management 4-51

RECOVER qualifier — EDT Editor 3-1
  DCL — EDT Editor 4-4
  example — EDT Editor 3-3 to 3-5
  MCR — EDT Editor 4-6
  restoring files with — EDT Editor 3-1
Recovery techniques
  RCT
    for disks — System Management 5-1
RED command — Writing I/O Driver 2-6
  — MCR Operations 3-144
  VMR — System Management 10-33
Redefining key
  description of feature — EDT Editor 1-9
  keypad editing — EDT Editor 5-54, 10-5
  keypad function — EDT Editor 10-1
  line editing — EDT Editor 7-4, 10-2
  nokeypad editing — EDT Editor 8-10, 10-1
  repeat count — EDT Editor 10-9
  ways of — EDT Editor 10-1
REDIRECT command — MCR Operations 3-144
  Basic MCR — System Generation (11S) 2-2
  command line format — MCR Operations 3-144
  error message — MCR Operations 3-144
  example — MCR Operations 3-144
  VMR — System Management 10-33
    command line format — System Management 10-33
    example — System Management 10-33
Redirecting
  a spooled device — Executive 5-83
Redirection — Command Language 5-16 to 5-18
Reentry
  vector register — ODT 5-3
REF command — EDT Editor 8-16
REF field in KEY block — RMS-11 Macros 2-13
  CLOSE operation — RMS-11 Macros 5-3
  CREATE operation — RMS-11 Macros 5-9, 5-18
  DISPLAY operation — RMS-11 Macros 5-30
  ENTER operation — RMS-11 Macros 5-35
  ERASE operation — RMS-11 Macros 5-40
  EXTEND operation — RMS-11 Macros 5-46
  offset — RMS-11 Macros 6-67
  OPEN operation — RMS-11 Macros 5-73 to 5-74
  PARSE operation — RMS-11 Macros 5-86
  REMOVE operation — RMS-11 Macros 5-102
  RENAME operation — RMS-11 Macros 5-108
  SEARCH operation — RMS-11 Macros 5-116
  summary — RMS-11 Macros 6-90
Reference
  search — ODT 2-8, 6-3
Refreshing the screen (CTRL/W) — EDT Editor 5-8
REG symbolic argument — PDP-11 MACRO-11 6-20 to 6-21
Region — Executive 3-4
  — Task Builder 2-18
  absolute — Task Builder 5-9
    building precautions — Task Builder 5-7
    mapping for — Task Builder 5-8
    mapping of — Task Builder 5-7
    specifying an — Task Builder 5-7
    symbol definition file — Task Builder 5-9
  allocation
    diagram — Task Builder 5-20
    of window block for — Task Builder 5-25
  APR
    specifying — Task Builder 5-6
  assigning references — Task Builder 5-23
  attaching to — Executive 3-5
  building

Region
  building (Cont.)
    a linking task — Task Builder 5-21 to 5-22
    and linking to a — Task Builder 5-14, 5-17 to 5-18
    interaction of /CO/LI/PI switch — Task Builder 5-3
    options
      in an overlaid — Task Builder 5-10
    options in an overlaid — Task Builder 5-11
    use of /CO/LI/PI switch — Task Builder 5-3
    with PAR option — Task Builder 5-2
  common — Task Builder 2-19 to 2-20
  definition block — Executive 3-6, 3-11 to 3-12
  descriptor — Task Builder B-21
  descriptor in overlay — Task Builder 3-20
  dynamic — Executive 3-5, 5-42
    — Task Builder 2-20, 5-40 to 5-43
    building a task that creates a — Task Builder 5-40 to 5-43
  fixing — System Management 10-18
    restrictions — System Management 10-18
  ID — Executive 3-5
  installing in RSX-11M — Task Builder 5-2 to 5-3, 5-20
  installing in RSX-11M-PLUS — Task Builder 5-2 to 5-3, 5-20
  library — Task Builder 2-20
  linked to a region — Task Builder 5-26
  linked with a region — Task Builder 5-25
  linking to a — Task Builder 5-13 to 5-14, 5-26
  loading
    restrictions — System Management 10-18
  map — Task Builder 5-19
  mapping of an absolute — Task Builder 5-7
  mapping windows — Executive 3-7
  memory-resident overlaid — Task Builder 5-9
    building — Task Builder 5-9
    example of building — Task Builder 5-10
  number of — Task Builder 5-17
  options for building — Task Builder 5-17 to 5-18
  options for linking to — Task Builder 5-14
  overlaid — Task Builder 5-9
    autoload call overhead — Task Builder 5-13
    autoload in — Task Builder 5-13
    autoload vector — Task Builder 5-11
    FTB and old libraries — Task Builder 5-13
    global symbols in .STB file — Task Builder 5-11
    I- and D-space task vectors — Task Builder 5-11
    named program section — Task Builder 5-13
    run-time support for — Task Builder 5-12 to 5-13
    .STB file — Task Builder 5-11
  partition — Task Builder 5-28
    requirements — Task Builder 5-2
  procedure for building a — Task Builder 5-17 to 5-18
  program section in — Task Builder 5-7
  protection — Executive 3-8
  PSECT
    building a linking task — Task Builder 5-23
  relocatable — Task Builder 5-5
    mapping — Task Builder 5-5
    specifying — Task Builder 5-5
    specifying APR for — Task Builder 5-6
    .STB file for a — Task Builder 5-9, 5-14, 5-16
  resident relocatable — Task Builder 5-5
  resolving PSECT names — Task Builder 5-39 to 5-40
  shareable — Executive 3-5
  shared — Executive 3-5
    — Task Builder 2-20, 5-1

Region
  shared (Cont.)
    allocation of window block for — Task Builder 5-14
    autoload vectors in — Task Builder 5-12
    defined — Task Builder 5-1
    initializing window block for — Task Builder 5-14
    installing — Task Builder 5-16
    partition requirement — Task Builder 5-3
    resolving PSECT names — Task Builder 5-16
    restrictions for overlaid — Task Builder 5-12
    symbol definition file — Task Builder 5-16
    use of /CO/LI/PI switches — Task Builder 5-9
    windows in — Task Builder 5-14
  size of — Task Builder 5-17
  specifying
    as position independent — Task Builder 10-9, 10-31
    partition for — Task Builder 5-28
  static common — Executive 3-4
  .STB file — Task Builder 5-4 to 5-5, 5-14, 5-16
    for an absolute — Task Builder 5-7, 5-9, 5-12
    using /CO/LI/PI switches — Task Builder 5-4
  symbol definition file — Task Builder 5-9
  task — Executive 3-4; Task Builder 2-18 to 2-20
  task building options — Task Builder 5-13 to 5-14
  type of access to — Task Builder 5-14
  use of /CO/LI/PI switches — Task Builder 5-5
  window — Task Builder 5-15, 5-25
Region Definition Block — Executive 5-16 to 5-17, 5-42 to 5-43, 5-56 to 5-57
  See also RDB
Region ID
  determining — Executive 5-16
Region status word — Executive 5-42, 5-56
Register — ODT 2-6, 5-1
  A — ODT 2-6, 5-3, 6-2
  address mode — PDP-11 MACRO-11 5-2
  argument — ODT 6-2
  B — ODT 2-6, 5-4
  breakpoint — Program Development 5-6
    address — ODT 2-6, 3-1 to 3-2, 5-4
    instruction — ODT 5-4
    proceed count — ODT 3-3, 5-4
  C — ODT 2-6, 5-3
  cache control — Crash Dump Analyzer 3-2
  constant — ODT 2-6
  CPU error — Crash Dump Analyzer 3-2
  D — ODT 2-7, 5-4, 6-2
  deferred address mode — PDP-11 MACRO-11 5-3
  definition
    control — PDP-11 MACRO-11 6-20 to 6-21
    default — PDP-11 MACRO-11 3-10
  device LUN — ODT 2-7, 5-4, 6-2
  directive status word — ODT 2-6, 5-3
  E — ODT 2-7, 5-4
  expression — PDP-11 MACRO-11 5-2
  F — ODT 2-6, 5-3
  format — ODT 2-6
  G — ODT 2-7, 5-4
  general — ODT 5-2
  H — ODT 2-6, 5-3, 6-1
  high memory limit — ODT 2-6, 6-1
  I — ODT 2-7, 5-4
  indicator — ODT 2-8
  instruction — ODT 2-7

Register (Cont.)
  internal — ODT 5-2
  L — ODT 2-6, 5-3, 6-1
  low memory limit — ODT 2-6, 6-1
  M — ODT 2-6, 5-3, 6-2
  memory limit — ODT 5-3
  memory management — Crash Dump Analyzer 3-2
  memory operation — ODT 6-1
  memory system error — Crash Dump Analyzer 3-2
  page address — Crash Dump Analyzer 3-2
  page descriptor — Crash Dump Analyzer 3-2
  percent sign in expression — PDP-11 MACRO-11 5-2
  proceed count — ODT 2-7
  processor status — ODT 2-6, 5-3
  Q — ODT 2-6, 4-1, 5-3, 7-2
  quantity — ODT 2-6, 5-3
  R — ODT 2-7, 5-5 to 5-6
  reentry vector — ODT 2-6, 5-3, 5-7
  relocation — ODT 2-7, 5-5 to 5-6
    Program Development 5-2 to 5-4
  S — ODT 2-6, 5-3
  search argument — ODT 2-6, 6-2
  search limit — ODT 5-3
  search mask — ODT 2-6, 6-2
  SST stack content — ODT 2-7, 5-4
  SST vector — ODT 2-7, 5-5
  symbol — PDP-11 MACRO-11 3-10
  term indicator — PDP-11 MACRO-11 3-2
  Unibus mapping — Crash Dump Analyzer 3-2
  V — ODT 2-7, 5-5
  W — ODT 2-6, 5-3
  X — ODT 2-6, 5-3, 5-7
Register handling
  control swapping — System Library 2-2
  save all registers ($SAVAL) — System Library 2-2
  save registers 0-2 ($SAVVR) — System Library 2-4
  save registers 1-5 (.SAVR1) — System Library 2-5
  save registers 3-5 ($SAVRG) — System Library 2-3
Register indicator — ODT 2-3, 7-3
  C register — ODT 2-3
  current location (.) — ODT 2-3, 2-5
  Q register — ODT 2-3
Register report — Error Logging 3-18
Register set — ODT 5-4
REGISTER_DEFINITIONS argument — PDP-11 MACRO-11 8-10
Reinserting deleted text
  keypad editing — EDT Editor 2-12, 2-17, 5-25 to 5-36
  line editing (MOVE) — EDT Editor 7-11
  nokeypad editing — EDT Editor 2-41, 8-15, 8-24 to 8-25
REL argument to ORG$ macro — RMS-11 Macros 2-3
REL symbolic argument — PDP-11 MACRO-11 6-42
Relative
  address — ODT 2-2
  branch location — ODT 2-6, 4-5
Relative address mode — PDP-11 MACRO-11 5-8
  assemble as absolute — PDP-11 MACRO-11 6-19
Relative deferred address mode — PDP-11 MACRO-11 5-9
Relative file organization — RMS-11 Introduction 3-5
    RMS-11 User's Guide 1-4, 1-11
  See also FB$REL code
  access declarations — RMS-11 User's Guide 4-6
  allocation
    DEQ — RMS-11 User's Guide 4-4
    initial — RMS-11 User's Guide 4-3
  and remote access — RMS-11 User's Guide B-3

Relative file organization
(Cont.)
asynchronous operations — RMS-11 User's Guide 4-14
buckets — RMS-11 User's Guide 4-1
cell — RMS-11 Introduction 3-5
cells — RMS-11 User's Guide 4-1
CONNECT operation — RMS-11 User's Guide 4-7
contiguity — RMS-11 User's Guide 4-4
declaring with ORG$ macro — RMS-11 Macros 2-3
deferred write — RMS-11 User's Guide 4-14
DELETE operation — RMS-11 User's Guide 4-7
design — RMS-11 User's Guide 4-1
allocation — RMS-11 User's Guide 4-3
bucket size — RMS-11 User's Guide 4-2
MRN — RMS-11 User's Guide 4-5
record format — RMS-11 User's Guide 4-2
directory operations — RMS-11 User's Guide 4-15
DISCONNECT operation — RMS-11 User's Guide 4-8
file operations — RMS-11 User's Guide 4-15
FIND operation — RMS-11 User's Guide 4-8
FLUSH operation — RMS-11 User's Guide 4-10
GET operation — RMS-11 User's Guide 4-10, 4-12 to 4-13
I/O techniques — RMS-11 User's Guide 4-14
MRN — RMS-11 User's Guide 4-4
multiple access streams — RMS-11 User's Guide 4-15
multiple buffers — RMS-11 User's Guide 4-15
prologue — RMS-11 User's Guide 4-1
PUT operation — RMS-11 User's Guide 4-11 to 4-12
random access
by key — RMS-11 User's Guide 4-1
by RFA — RMS-11 User's Guide 4-1
record operations — RMS-11 User's Guide 4-7
record size — RMS-11 User's Guide 4-2
record transfer modes — RMS-11 User's Guide 4-12
move mode — RMS-11 User's Guide 4-12
REWIND operation — RMS-11 User's Guide 4-12
RRN — RMS-11 Introduction 3-6
sequential access — RMS-11 User's Guide 4-1
shared access — RMS-11 User's Guide 4-6
block access — RMS-11 User's Guide 4-6
record access — RMS-11 User's Guide 4-6
sharing declarations — RMS-11 User's Guide 4-6
stream operations — RMS-11 User's Guide 4-7
structure — RMS-11 User's Guide 4-1
conceptual — RMS-11 User's Guide 4-1
physical — RMS-11 User's Guide 4-1
UPDATE operation — RMS-11 User's Guide 4-12 to 4-13
Relative record number
See BKT field in RAB
See RRN
RELEASE command
format
entry number — Batch and Queue 2-23
job name — Batch and Queue 2-23
RELEASE/ENTRY command — Command Language 9-29
RELEASE/JOB command — Command Language 9-29
$RELOC routine — Writing I/O Driver 5-25
Relocatable
address — Introduction 4-6, 4-9, Gloss-28
ODT 2-2, 5-6
calculating — ODT 2-9, 7-1
Relocatable expression — PDP-11 MACRO-11 3-17
Relocatable program section — PDP-11 MACRO-11 6-44 to 6-45
Relocatable region
See Region

Relocation
  bias — PDP-11 MACRO-11 2-2, 3-17 to 3-18, 4-1
  code — Task Builder 2-4
  complex — PDP-11 MACRO-11 4-1; Task Builder A-22
    entry — Task Builder A-23
    operation codes — Task Builder A-22
  directory command byte — Task Builder A-13
  directory record — Task Builder A-12
    entries — Task Builder A-12 to A-13
    format — Task Builder A-14
  displaced
    global — Task Builder A-16
  global — Task Builder A-15
    additive — Task Builder A-16
  global additive displaced — Task Builder A-17
  internal — Task Builder A-14
    displaced — Task Builder A-15
  library
    resident — Task Builder A-23
  overview of — PDP-11 MACRO-11 4-1
  program section — Task Builder A-19
    additive — Task Builder A-20
    additive displaced — Task Builder A-21
    displaced — Task Builder A-19
  register — ODT 2-2, 2-7, 5-5 to 5-6
    clear — ODT 2-10, 5-6
    set — ODT 2-10, 5-6
  resident library — Task Builder A-23
Relocation register — Program Development 5-2 to 5-4
REM command — MCR Operations 3-146
  VMR — System Management 10-34
.REM directive — PDP-11 MACRO-11 6-18
/REMOTE keyword
  SET command — MCR Operations 3-193
    VMR — System Management 10-57
Remote line — I/O Drivers 2-41 to 2-42
  answer speed — I/O Drivers 2-42
  disconnecting — I/O Drivers 2-23
Remote operation
  P/OS — RMS-11 Macros D-3
.REMOV — I/O Operations 4-16
Removable and fixed, single
    spindle disk — I/O Drivers 5-4A
REMOVE command — Command Language 7-34 to 7-35, 9-29; MCR Operations 3-146
  command line format — MCR Operations 3-146
  error message — MCR Operations 3-146
  example — MCR Operations 3-146
  VMR — System Management 10-34
    command line format — System Management 10-34
    example — System Management 10-34
$REMOVE macro — RMS-11 Macros 5-102
  RSTS/E — RMS-11 Macros D-4
REMOVE operation — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17; RMS-11 Macros 3-6
  BDB requirement — RMS-11 Macros 2-8
  I/O buffer requirement — RMS-11 Macros 2-7
  IFAB requirement — RMS-11 Macros 2-5
  remote access — RMS-11 User's Guide B-1
  $REMOVE macro — RMS-11 Macros 5-102
  wildcard loop — RMS-11 User's Guide A-4; RMS-11 Macros 3-9 to 3-10
    nonselective — RMS-11 Macros 3-10

REMOVE operation
  wildcard loop (Cont.)
    selective — RMS-11 Macros 3-11
.RENAM — I/O Operations 4-20
RENAME command — Introduction 3-8; Command Language 4-41 to 4-43, 9-30
$RENAME macro — RMS-11 Macros 5-108
  example — RMS-11 Macros 7-15
RENAME operation — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17; RMS-11 Macros 3-6
  BDB requirement — RMS-11 Macros 2-8
  file versions — RMS-11 User's Guide A-3
  I/O buffer requirement — RMS-11 Macros 2-7
  IFAB requirement — RMS-11 Macros 2-5
  remote access — RMS-11 User's Guide B-1
  $RENAME macro — RMS-11 Macros 5-108
  wildcard loop — RMS-11 User's Guide A-4; RMS-11 Macros 3-9 to 3-10
    nonselective — RMS-11 Macros 3-10
    selective — RMS-11 Macros 3-11
RENEW command
  EDI editor — Program Development 2-15
RENew command
  EDI editor — Utilities 2-19, 2-43
Renumbering line
  See RESEQUENCE command
Reopen last location — ODT 4-3
Repeat block
  indefinite — PDP-11 MACRO-11 7-3, 7-16 to 7-19
Repeat count
  redefine key — EDT Editor 10-9
REPEAT key — Command Language 3-14
Repeating code block — PDP-11 MACRO-11 7-19
REPLACE command — EDT Editor 2-27, 7-14
REPLACE function — EDT Editor 5-40
Replacement block
  RCT — System Management 5-2
    primary — System Management 5-4
    secondary — System Management 5-4
Report
  interval
    output frequency — System Management 4-60
Report control function — Error Logging 5-22
Report Generator
  See RPT
Report switch — Error Logging 3-6, 3-20
REPORTERRORS YES/NO command
  IOX — System Management 4-52
Reporting
  problems and errors — Release Notes 1-37
    RMS-11 — Release Notes 2-21
.REPT directive — PDP-11 MACRO-11 7-19
Request and Pass Offspring
    Information directive — Executive 5-129
REQUEST command — Command Language 3-32, 9-30
Request for next tape
  terminating — I/O Operations G-11
Request Task directive — Executive 5-133
RES command — MCR Operations 3-147
/RES switch
  PRI command — Batch and Queue 2-5
RESCOM
  linking to region — Task Builder 5-14
  option — Task Builder 11-28 to 11-29

RESEQUENCE command — EDT Editor 2-31, 2-36, 6-3, 7-15
  EDT — Introduction 2-9 to 2-11
Reserved symbol — PDP-11 MACRO-11 2-3, 3-1, 3-7
  See also Permanent Symbol Table for the Task Builder — Task Builder E-1
$RESET
  predefined syntax element in MML — System Management 12-44
RESET function — EDT Editor 5-8, 5-34
Reset switch — Error Logging 2-4, 2-7
Resident
  common
    name block data — Task Builder B-8
  library
    name block data — Task Builder B-8
    relocation — Task Builder A-23
  memory
    for TKB performance — Task Builder F-3
  overlay operator
    enabling recognition of — Task Builder 10-34
  region
    using to reduce overhead — Task Builder F-4
Resident data base
  assembling — Writing I/O Driver 3-12
  example — Writing I/O Driver 6-1
Resident driver
  assembling — Writing I/O Driver 3-13
  combination with data base — Writing I/O Driver 3-1
  definition — Writing I/O Driver 1-1
  example — Writing I/O Driver 6-1
  incorporating — Writing I/O Driver 3-13
  linking data base — Writing I/O Driver 3-3
  rebuilding and reincorporating
    after debugging — Writing I/O Driver 3-29
  task-building — Writing I/O Driver 3-14
Resident in memory — Introduction 5-7, 5-9, Gloss-2
Resident library — RMS-11 User's Guide 8-1, 8-8
  installing — MCR Operations 3-93
  RMSRES — RMS-11 User's Guide 8-6, 8-9
Resident region
  map file
    including symbol definition in — Task Builder 10-26
RESLIB
  linking to region — Task Builder 5-14
  option — Task Builder 11-28 to 11-29
Resource Accounting — Introduction 1-19
Resource Monitoring Display
  See RMD utility
REST
  range specification — EDT Editor 6-10
RESTART command
  IOX — System Management 4-53
/RESTART job qualifier
  SET QUEUE command — Batch and Queue 2-21
/RESTART qualifier
  PRINT command — Batch and Queue 2-5
Restarting TKB option — Task Builder 11-4
.RESTORE directive — PDP-11 MACRO-11 3-11, 6-47 to 6-48
Restoring files — RMS-11 User's Guide 1-10, 1-12
/RESTRICT subkeyword
  CLI command — MCR Operations 3-39
Restriction
  BRU

Restriction
  BRU (Cont.)
    backup tapes — Release Notes 1-35
  BRU64K — Release Notes 1-23
  DCL as Catch-All Task — Release Notes 1-28
  device — Release Notes 1-16, 1-35
  EDT V2.0 — Release Notes 1-34
  Error Logging — Release Notes 1-24
  TKB — Release Notes 1-29
  V4.1 on-line SYSGEN — Release Notes 1-22
  VMR support
    on RSX-11S — Release Notes 3-2
Resultant string
  See RSA field in NAM block
RESUME command — MCR Operations 3-147
  Basic MCR — System Generation (11S) 2-2
  command line format — MCR Operations 3-147
  error message — MCR Operations 3-147
  example — MCR Operations 3-147
Resume Task directive — Executive 5-139
Resuming
  program execution — ODT 3-2
  task execution — ODT 1-5, 3-2
RETRIES command
  IOX — System Management 4-54
Retrieval pointer — RMS-11 User's Guide 8-11
  allocating — I/O Operations 2-15
  in memory — RMS-11 User's Guide 8-11
  on disk — RMS-11 User's Guide 8-11
Retrieval pointer count
  See RTV field in FAB
Retrieval pointer format — I/O Operations F-5
/RETRY switch
  BAD utility — Utilities 6-6
Return
  operation, from — RMS-11 Macros 2-14
RETURN command
  EDI editor — Utilities 2-19, 2-43
.RETURN directive — MCR Operations 4-48
  format — MCR Operations 4-48
Return from completion handler — RMS-11 Macros 2-18
RETURN key — Introduction 1-3 to 1-4, 1-6 to 1-7, 1-10, 2-2, 2-5, 2-8, 2-16, Gloss-16 to Gloss-17; Command Language 3-2, 3-12, 3-17, 3-22; MCR Operations 2-15
  closing location
    ODT — Program Development 5-5, 5-8
  displaying new line
    EDI editor — Program Development 2-13
  entering text
    EDI editor — Program Development 2-9
  exiting
    PMT — System Management 13-8
  terminating input
    EDI editor — Program Development 2-9 to 2-10, 2-18, 7-7
Return key command — ODT 2-5, 4-2
$RETURN macro — RMS-11 Macros 2-18
RETURN statement — Error Logging 4-31, 5-33
RETYPE command
  EDI editor — Utilities 2-19, 2-43
Revector control table
  RCT
    status codes — System Management 5-2

Reverse CUT EDT Editor 5-37
Reverse search
  keypad editing EDT Editor 5-21
  nokeypad editing EDT Editor 2-42
Reverse SELECT EDT Editor 5-52
Reverse video EDT Editor 2-12, 5-33
/REVISED qualifier
  BRU utility Utilities 7-21
Revising files with buffer EDT Editor 2-1
Revision date
  See also RDT field in DAT block
  RMSBCK utility RMS-11 Utilities 6-8
Revision number
  See RVN field in DAT block
$REWIND macro RMS-11 Macros 5-114
  RSTS/E magtape device RMS-11 Macros D-4
REWIND operation RMS-11 Introduction 4-4
RMS-11 User's Guide 1-15
  indexed files RMS-11 User's Guide 7-6
  record stream RMS-11 Macros 4-9
  relative files RMS-11 User's Guide 4-12
  $REWIND macro RMS-11 Macros 5-114
  sequential files RMS-11 User's Guide 3-11
/REWIND qualifier
  BRU utility Utilities 7-21
REWIND_MAGTAPE
  RMSDES utility RMS-11 Utilities 2-34
Rewinding
  file on ANSI magtape I/O Operations 4-18
  file open on terminal I/O Operations 4-18
RF11/RS11 I/O Drivers 5-1
RFA RMS-11 Introduction 3-11, 3-15
RMS-11 User's Guide 1-12
  relative files RMS-11 User's Guide 4-1
  sequential files RMS-11 User's Guide 3-2
RFA field in RAB RMS-11 Macros 4-6
  CONNECT operation RMS-11 Macros 5-7
  FIND operation RMS-11 Macros 5-50, 5-52, 5-54
  GET operation RMS-11 Macros 5-61, 5-65, 5-67
  offset RMS-11 Macros 6-115
  PUT operation RMS-11 Macros 5-93, 5-96
  READ operation RMS-11 Macros 5-99, 5-101
  summary RMS-11 Macros 6-129
  WRITE operation RMS-11 Macros 5-128, 5-130
RFA record access
  See also RB$RFA code in RAC field
  to relative files RMS-11 User's Guide 4-1
  to sequential files RMS-11 User's Guide 3-2
RFM field in FAB
  CREATE operation RMS-11 Macros 5-11
  offset RMS-11 Macros 6-23
  OPEN operation RMS-11 Macros 5-78
  summary RMS-11 Macros 6-61
$$RGDS
  reserved PSECT name Task Builder E-3
RHB field in RAB RMS-11 Macros 4-7
  GET operation RMS-11 Macros 5-61, 5-64, 5-68
  offset RMS-11 Macros 6-115
  PUT operation RMS-11 Macros 5-92, 5-96
  summary RMS-11 Macros 6-130
  UPDATE operation RMS-11 Macros 5-124
RIGHT function EDT Editor 2-11, 5-14
Right-angle bracket Command Language 3-15
RK05 I/O Drivers 5-3
RK06 I/O Drivers 5-3
RK06/07 kit
  1600 bpi tape kit

RK06/07 kit
  1600 bpi tape kit (Cont.)
    copying
      on-line — System Generation (11M) 2-35
      stand-alone — System Generation (11M) 2-11
  800 bpi tape kit
    copying
      on-line — System Generation (11M) 2-37
      stand-alone — System Generation (11M) 2-14
  disk kit
    copying
      on-line — System Generation (11M) 2-39
      stand-alone — System Generation (11M) 2-17
RK07 — I/O Drivers 5-3
RL01/02 kit
  1600 bpi tape kit
    copying
      on-line — System Generation (11M) 2-41
      stand-alone — System Generation (11M) 2-20
  800 bpi tape kit
    copying
      on-line — System Generation (11M) 2-43
      stand-alone — System Generation (11M) 2-24
  disk kit
    copying
      on-line — System Generation (11M) 2-45
      stand-alone — System Generation (11M) 2-28
RL02 — I/O Drivers 5-3
RL02 exercise
  IOX — System Management 4-9
$RLCB (Release core block) — System Library 7-4
$RLCB system routine — RMS-11 Macros 2-20
RLSCT FORTRAN subroutine — Task Builder 5-56, 5-58
/RM switch
  PIP utility — Utilities 3-35
RM02 — I/O Drivers 5-3
RM02/03 module — Error Logging 4-37 to 4-49
RM02/03 notes module — Error Logging 4-67 to 4-68
RM02/03/05/80, RP07 tape kit
  copying
    on-line — System Generation (11M) 2-32
    stand-alone — System Generation (11M) 2-6
RM03 — I/O Drivers 5-3
RM05 — I/O Drivers 5-3
RM80 — I/O Drivers 5-3
RMD — System Generation (11M) 4-60, Command Language 7-53, 7-55 to 7-57, 8-9 to 8-13, 9-38
  altering
    active task display from MCR — System Management 6-9
    display from setup page — System Management 6-7
    I/O counts
      from setup page — System Management 6-12
    memory display
      from MCR — System Management 6-8
    system statistics
      from MCR — System Management 6-12B
      from setup page — System Management 6-12B
    task display
      from setup page — System Management 6-9, 6-11
  command line
    to install — System Management 6-2
    to invoke — System Management 6-2
  DEVICE command — System Management 6-12
  display page — System Management 6-1
  displaying
    active task — System Management 6-8

RMD
  displaying (Cont.)
    commands to alter task — System Management 6-11
    commmands to alter I/O counts — System Management 6-12
    help — System Management 6-3
    I/O counts — System Management 6-12
    memory — System Management 6-4
    RSX-11M-PLUS only — System Management 6-11
    system statistics — System Management 6-12A
    task header — System Management 6-10
  error message — System Management 6-13D
  FREE command — System Management 6-8
  I/O counts display
    altering from MCR — System Management 6-12A
  installing — System Management 6-2
    individual terminal — System Management 6-2
  introduction to — System Management 6-1
  invoking — System Management 6-2
    at terminal — System Management 6-2
  OWNER command — System Management 6-9
  RATE command — System Management 6-8 to 6-9, 6-11 to 6-12A
  running
    on slaved terminal — System Management 6-2
  setup page — System Management 6-1, 6-7
  TASK command — System Management 6-9, 6-11
  task header display
    altering from MCR — System Management 6-11
  task-build command file
    modifying — System Management 6-12C
  using
    individual terminal — System Management 6-2
RMD utility — Introduction 5-9, Gloss-28
RMDEMO
  See RMD utility
RMS-11 — Introduction 5-12, Gloss-29; Command Language 4-22, 4-43 to 4-49, B-1
  comparison with V1.8 — Release Notes 2-13
  file sharing — System Generation (11M) 4-23
  files included in distribution kit — Release Notes 2-17
  installation — Release Notes 2-19
    RL01/02 and RK06/07 — Release Notes 2-19; System Generation (11M) 6-10
  known problems — Release Notes 2-17
  library — Program Development 1-9, 1-11
  miscellaneous info — Release Notes 2-16
  new features — Release Notes 2-1
    clustering support — Release Notes 2-1
    disk-overlaid — Release Notes 2-1
    increased device independence — Release Notes 2-5
    linking programs with RMSDAP support — Release Notes 2-3
    more usable block I/O facilities — Release Notes 2-6
    new file and directory operations — Release Notes 2-4
    random access to fixed-format disk sequential files — Release Notes 2-5
    remote file and record access via DECnet — Release Notes 2-2
    remote node specification — Release Notes 2-3
    RMSDAP enviroments — Release Notes 2-4
    sharing for relative and indexed files — Release Notes 2-6

RMS-11
  new features (Cont.)
    subset library — Release Notes 2-1
    task independence support — Release Notes 2-1
    wildcarding — Release Notes 2-4
  position of
    in I/O hierarchy — Writing I/O Driver 2-2
  problems fixed with V2.0 — Release Notes 2-16
  RMSINSTAL.CMD — System Generation (11M) 6-10
  startup command procedure — Release Notes 2-19; System Generation (11M) 6-11
  using VMR to create partitions — System Generation (11M) 5-19
  utility configurations — Release Notes 2-20
RMS-11 defaults — RMS-11 User's Guide 2-2
RMS-11 File Back-Up Utility
  See RMSBCK
RMS-11 File Conversion Utility
  See RMSCNV
RMS-11 File Definition Utility
  See RMSDEF
RMS-11 File Design Utility
  See RMSDES
RMS-11 File Display Utility
  See RMSDSP
RMS-11 File Restoration Utility
  See RMSRST
RMS-11 Indexed File Load Utility
  See RMSIFL
RMS-11 Macro Programmer's Guide
  technical changes — Release Notes 2-11
RMS-11 resident library
  See RMSRES
RMS-11 User's Guide
  technical changes — Release Notes 2-9
RMS-11 Utilities
  technical changes — Release Notes 2-12
RMS-11 utilities
  new features — Release Notes 2-7
RMSBCK — RMS-11 Introduction 5-3; RMS-11 User's Guide 1-12; RMS-11 Utilities 1-1, 3-3, 4-5, 5-1, 6-1, 7-1, 7-5, 7-9 to 7-10
  back-up file contents — RMS-11 Utilities 6-1
  back-up medium — RMS-11 Utilities 6-3
  /CD switch — RMS-11 Utilities 6-8 to 6-9
  command string — RMS-11 Utilities 6-2 to 6-3
  container file — RMS-11 Utilities 6-1
  data integrity checking — RMS-11 Utilities 6-6 to 6-7, 6-9
  examples — RMS-11 Utilities 6-10
  global switches — RMS-11 Utilities 6-5
  HELP — RMS-11 Utilities 6-4
  /ID switch — RMS-11 Utilities 6-4 to 6-5
  indirect command file — RMS-11 Utilities 6-2
  input file switches — RMS-11 Utilities 6-8
  intersystem file transfer — RMS-11 Utilities 1-2
  invoking — RMS-11 Utilities 6-2
  magnetic tape — RMS-11 Utilities 6-7
    multivolume — RMS-11 Utilities 6-9
  messages — RMS-11 Utilities C-1
  /[NO]QU switch — RMS-11 Utilities 6-5 to 6-7, 6-10
  output file switches — RMS-11 Utilities 6-6
  processing — RMS-11 Utilities 6-8
    data integrity checking — RMS-11 Utilities 6-9
    explicit/implicit file-spec — RMS-11 Utilities 6-9
    extended diagnostic messages — RMS-11 Utilities 6-10
    summary listing — RMS-11 Utilities 6-10

RMSBCK (Cont.)
  prompt — RMS-11 Utilities 6-2
  query mode — RMS-11 Utilities 6-5 to 6-7, 6-10
  /RA switch — RMS-11 Utilities 6-6 to 6-7, 6-9
  /RC switch — RMS-11 Utilities 6-7, 6-9
  /RD switch — RMS-11 Utilities 6-8 to 6-9
  /RW switch — RMS-11 Utilities 6-7
  /SL switch — RMS-11 Utilities 6-6, 6-10
  /SU switch — RMS-11 Utilities 6-7
  summary listing — RMS-11 Utilities 6-10
  terminating — RMS-11 Utilities 6-2
RMSCNV — Command Language 4-43 to 4-49, B-1; RMS-11 Introduction 5-2; RMS-11 User's Guide 1-12; RMS-11 Utilities 1-1, 3-1, 4-1
  /AP switch — RMS-11 Utilities 4-5, 4-7, 4-13, 4-15
  ASCII stream files — RMS-11 Utilities 4-3, 4-8
  /BL switch — RMS-11 Utilities 4-8
  block mode — RMS-11 Utilities 4-1
  /CA switch — RMS-11 Utilities 4-8
  command string — RMS-11 Utilities 4-3 to 4-4
  CTRL/Z
    file terminator — RMS-11 Utilities 4-8
  /EO switch — RMS-11 Utilities 4-8
  examples — RMS-11 Utilities 4-16
  /FO switch — RMS-11 Utilities 4-9, 4-15
  HELP — RMS-11 Utilities 4-5
  /ID switch — RMS-11 Utilities 4-5, 4-9
  /IM switch — RMS-11 Utilities 4-9
  indirect command file — RMS-11 Utilities 4-4
  intersystem file transfer — RMS-11 Utilities 1-2, 4-1
  invoking — RMS-11 Utilities 4-3
  key name — RMS-11 Utilities 4-10
  key of reference — RMS-11 Utilities 4-10
  /KN switch — RMS-11 Utilities 4-10, 4-16
  /KR switch — RMS-11 Utilities 4-10, 4-16
  /LO switch — RMS-11 Utilities 4-10
  /MA switch — RMS-11 Utilities 4-10
  mass-insertion mode — RMS-11 Utilities 4-10
  messages — RMS-11 Utilities C-1
  /ML switch — RMS-11 Utilities 4-11
  network facilities — RMS-11 Utilities 4-1
  /PD switch — RMS-11 Utilities 4-12
  populating files — RMS-11 User's Guide 6-26 to 6-27
  processing — RMS-11 Utilities 4-14
    input file organization — RMS-11 Utilities 4-16
    output file organization — RMS-11 Utilities 4-15
  prompt — RMS-11 Utilities 4-3
  /SL switch — RMS-11 Utilities 4-12
  /SU switch — RMS-11 Utilities 4-5, 4-7, 4-13, 4-15
  summary listing — RMS-11 Utilities 4-12
  supersession — RMS-11 Utilities 4-13
  terminating — RMS-11 Utilities 4-4
  /TR switch — RMS-11 Utilities 4-13
  /WF switch — RMS-11 Utilities 4-14
RMSDEF — RMS-11 Utilities 1-1, A-1
  alignment — RMS-11 Utilities A-14
  allocation
    data — RMS-11 Utilities A-16
    file — RMS-11 Utilities A-14
  alternate key, definition — RMS-11 Utilities A-11
  area definition — RMS-11 Utilities A-13
  area numbers — RMS-11 Utilities A-16
  block boundaries — RMS-11 Utilities A-9

RMSDEF (Cont.)
  bucket size RMS-11 Utilities A-15
  carriage control RMS-11 Utilities A-9
  command string RMS-11 Utilities A-5
  contiguity RMS-11 Utilities A-15
  default extension quantity RMS-11 Utilities A-15
  file creation RMS-11 Utilities A-19
  file organization RMS-11 Utilities A-8
  file specification RMS-11 Utilities A-7
  fill numbers RMS-11 Utilities A-16
  fixed control area RMS-11 Utilities A-8
  HELP RMS-11 Utilities A-5
  /ID switch RMS-11 Utilities A-5
  indirect command file RMS-11 Utilities A-1 to A-2, A-5 to A-6, A-19
  invoking RMS-11 Utilities A-5
  location RMS-11 Utilities A-14
  magnetic tape RMS-11 Utilities A-8, A-10
  maximum record number RMS-11 Utilities A-9
  maximum record size RMS-11 Utilities A-9
  messages RMS-11 Utilities A-20
  placement control RMS-11 Utilities A-14
  primary key, definition RMS-11 Utilities A-10
  processing RMS-11 Utilities A-1
  protection RMS-11 Utilities A-18
  record format RMS-11 Utilities A-8
  terminating RMS-11 Utilities A-5
RMSDES RMS-11 Introduction 5-1
RMS-11 User's Guide 1-12, 1-18
RMS-11 Utilities 1-1, 2-1, 4-2, 5-1
  allocation
    areas RMS-11 Utilities 2-10, 2-25
  areas
    defining RMS-11 Utilities 2-1, 2-42, B-1
      and BUCKET_SIZE attribute RMS-11 Utilities 2-32
      and DATA_AREA attribute RMS-11 Utilities 2-40
      and INDEX_AREA attribute RMS-11 Utilities 2-41
      and LEVEL1_INDEX_AREA RMS-11 Utilities 2-41
      and SIZE attribute RMS-11 Utilities 2-36
      by default RMS-11 Utilities 2-43
      explicitly RMS-11 Utilities 2-43
    defining by default RMS-11 Utilities 2-17, 2-38
      CREATE command RMS-11 Utilities 2-8
      SET ALL command RMS-11 Utilities 2-14
    defining explicitly RMS-11 Utilities 2-17
    numbering RMS-11 Utilities 2-8, 2-28, 2-43
  attributes RMS-11 Utilities 2-29
    ALLOCATION (area section) RMS-11 Utilities 2-44
    ALLOCATION (file section) RMS-11 Utilities 2-31
    BLOCK_SPAN RMS-11 Utilities 2-37
    BUCKET_SIZE (area section) RMS-11 Utilities 2-43, 2-45
    BUCKET_SIZE (file section) RMS-11 Utilities 2-32
    CARRIAGE_CONTROL RMS-11 Utilities 2-37
    CHANGES RMS-11 Utilities 2-40
    clearing RMS-11 Utilities 2-22, 2-25
    clearing individual values RMS-11 Utilities 2-26
    clearing sections RMS-11 Utilities 2-26
    CLUSTER_SIZE RMS-11 Utilities 2-31
    CONTIGUOUS (area section) RMS-11 Utilities 2-46
    CONTIGUOUS (file section) RMS-11 Utilities 2-35
    CONTROL_FIELD_SIZE RMS-11 Utilities 2-37
    DATA_AREA RMS-11 Utilities 2-40
    DATA_FILL RMS-11 Utilities 2-40
    displaying RMS-11 Utilities 2-15, 2-26
    displaying individual values RMS-11 Utilities 2-26
    displaying sections RMS-11 Utilities 2-27

RMSDES
  attributes (Cont.)
    DUPLICATES RMS-11 Utilities 2-40, 2-42, 2-44
    EXACT_POSITIONING RMS-11 Utilities 2-47
    EXTENSION (area section) RMS-11 Utilities 2-45
    EXTENSION (file section) RMS-11 Utilities 2-32
    FILE PLACEMENT RMS-11 Utilities 2-30
    FORMAT RMS-11 Utilities 2-36
    INDEX_AREA RMS-11 Utilities 2-41
    INDEX_FILL RMS-11 Utilities 2-41
    informational RMS-11 Utilities 2-1, 2-17, 2-29
    LEVEL1_INDEX_AREA RMS-11 Utilities 2-41
    MAGTAPE_BLOCK_SIZE RMS-11 Utilities 2-34
    MAX_RECORD_NUMBER RMS-11 Utilities 2-34
    NAME (file section) RMS-11 Utilities 2-31
    NAME (key section) RMS-11 Utilities 2-38
    NULL_KEY RMS-11 Utilities 2-39
    NULL_VALUE RMS-11 Utilities 2-39
    ORGANIZATION RMS-11 Utilities 2-31
    OWNER RMS-11 Utilities 2-34
    POSITION RMS-11 Utilities 2-46
    PROTECTION RMS-11 Utilities 2-33
    resetting RMS-11 Utilities 2-21
    REWIND_MAGTAPE RMS-11 Utilities 2-34
    RMS-11 RMS-11 Utilities 2-1, 2-17, 2-29
    SEG0_POSITION RMS-11 Utilities 2-42
    SEGn_LENGTH RMS-11 Utilities 2-42
    SEGn_POSITION RMS-11 Utilities 2-42
    setting RMS-11 Utilities 2-13
    setting from data file RMS-11 Utilities 2-25
    setting from description file RMS-11 Utilities 2-24
    setting individual values RMS-11 Utilities 2-21
    setting sections RMS-11 Utilities 2-21
    SIZE RMS-11 Utilities 2-36
    SOURCE RMS-11 Utilities 2-30
    SUPERSEDE RMS-11 Utilities 2-35
    TARGET RMS-11 Utilities 2-30
    TYPE RMS-11 Utilities 2-38
  bucket fill size RMS-11 User's Guide 6-29
  bucket size RMS-11 User's Guide 6-22
    relative files RMS-11 User's Guide 4-3
  CLEAR command RMS-11 Utilities 2-6, 2-18, 2-25 to 2-26
    defining areas by default RMS-11 Utilities 2-44
    in indirect command file RMS-11 Utilities 2-4
    PROTECTION attribute RMS-11 Utilities 2-33
    with CREATE RMS-11 Utilities 2-8, 2-28
    with SAVE RMS-11 Utilities 2-27
  clearing attributes RMS-11 Utilities 2-6
  commands RMS-11 Utilities 2-4
  CREATE command RMS-11 Utilities 2-7, 2-18, 2-28, 2-31
    defining areas by default RMS-11 Utilities 2-44
    defining areas explicitly RMS-11 Utilities 2-43
    INDEX_AREA attribute RMS-11 Utilities 2-41
    key numbering RMS-11 Utilities 2-38
    LEVEL1_INDEX_AREA attribute RMS-11 Utilities 2-41
    setting attributes RMS-11 Utilities 2-21
    with GET RMS-11 Utilities 2-10, 2-25
  creating data files RMS-11 Utilities 2-28
  CTRL/Z command RMS-11 Utilities 2-2, 2-9, 2-18
  data file RMS-11 Utilities 2-3, 2-17, 2-24
    creating RMS-11 Utilities 2-3, 2-7, 2-28
    GET command RMS-11 Utilities 2-10
  defaults RMS-11 Utilities 2-21
  defining areas by default
    CREATE command RMS-11 Utilities 2-28

RMSDES (Cont.)
DEQ — RMS-11 User's Guide 3-5, 4-4, 6-26
description file — RMS-11 Utilities 2-3, 2-17, 2-24
EXIT command — RMS-11 Utilities 2-10
GET command — RMS-11 Utilities 2-10
SAVE command — RMS-11 Utilities 2-27
saving the design — RMS-11 Utilities 2-13
design buffer — RMS-11 Utilities 2-1
using — RMS-11 Utilities 2-16
design session — RMS-11 Utilities 2-1
resuming — RMS-11 Utilities 2-22
ESC command — RMS-11 Utilities 2-9, 2-21
examples — RMS-11 Utilities 2-47
EXIT command — RMS-11 Utilities 2-3, 2-9, 2-18, 2-27
GET command — RMS-11 Utilities 2-10, 2-17, 2-24
PROTECTION attribute — RMS-11 Utilities 2-33
with SAVE — RMS-11 Utilities 2-28
HELP command — RMS-11 Utilities 2-11
indirect command file — RMS-11 Utilities 2-3
comments — RMS-11 Utilities 2-4
initial allocation — RMS-11 User's Guide 3-4, 4-4, 6-26
invoking — RMS-11 Utilities 2-2
key segments — RMS-11 User's Guide 6-7
keys
numbering — RMS-11 Utilities 2-8, 2-28, 2-38
magnetic tape — RMS-11 Utilities 2-34
messages — RMS-11 Utilities 2-52
MRN — RMS-11 User's Guide 4-5
multiple areas — RMS-11 Utilities 2-7, 2-43
multiple keys — RMS-11 Utilities 2-7, 2-38
placement control — RMS-11 User's Guide 6-14
prompt — RMS-11 Utilities 2-2
conditional — RMS-11 Utilities 2-1, 2-13 to 2-15, 2-17, 2-21, 2-29
QUIT command — RMS-11 Utilities 2-2, 2-12, 2-18
SAVE command — RMS-11 Utilities 2-13, 2-18, 2-27
setting attributes — RMS-11 Utilities 2-21
saving the design — RMS-11 Utilities 2-13, 2-22, 2-27
sections, design buffer — RMS-11 Utilities 2-1, 2-16, 2-29
area section — RMS-11 Utilities 2-29, 2-42
file section — RMS-11 Utilities 2-29, 2-31
key section — RMS-11 Utilities 2-29, 2-38
key segments — RMS-11 Utilities 2-41
record section — RMS-11 Utilities 2-29, 2-36
system section — RMS-11 Utilities 2-29 to 2-30
SET command — RMS-11 Utilities 2-13, 2-17, 2-20, 2-33
allocation — RMS-11 Utilities 2-10
defining areas by default — RMS-11 Utilities 2-17, 2-43
defining areas explicitly — RMS-11 Utilities 2-43
INDEX_AREA attribute — RMS-11 Utilities 2-41
LEVEL1_INDEX_AREA attribute — RMS-11 Utilities 2-41
PROTECTION attribute — RMS-11 Utilities 2-33
with GET — RMS-11 Utilities 2-25
SHOW ALL command — RMS-11 Utilities 2-4
defining areas by default — RMS-11 Utilities 2-17
defining areas explicitly — RMS-11 Utilities 2-43
setting attributes — RMS-11 Utilities 2-21
SHOW command — RMS-11 Utilities 2-15, 2-18, 2-26
allocation — RMS-11 Utilities 2-10
PROTECTION attribute — RMS-11 Utilities 2-33
with GET — RMS-11 Utilities 2-25
SHOW ID command — RMS-11 Utilities 2-16
terminating — RMS-11 Utilities 2-2, 2-9, 2-12

RMSDES (Cont.)
  version — RMS-11 Utilities 2-16
RMSDSP — RMS-11 Introduction 5-3; RMS-11 User's Guide 1-12, 1-19; RMS-11 Utilities 1-1, 5-1, 6-3, 7-5, 7-10
  ANSI-standard tape — RMS-11 Utilities 5-3
  /BP switch — RMS-11 Utilities 5-3 to 5-4
  command string — RMS-11 Utilities 5-2 to 5-3
  container file — RMS-11 Utilities 5-1, 5-3 to 5-4
    detailed display — RMS-11 Utilities 5-4
  display information — RMS-11 Utilities 5-1
  examples — RMS-11 Utilities 5-5
  /FU switch — RMS-11 Utilities 5-2, 5-4
  HELP — RMS-11 Utilities 5-3
  /ID switch — RMS-11 Utilities 5-3, 5-5
  indirect command file — RMS-11 Utilities 5-2
  intersystem file transfer — RMS-11 Utilities 1-2
  invoking — RMS-11 Utilities 5-2
  magtape allocation information — RMS-11 Utilities 5-2
  messages — RMS-11 Utilities C-1
  mounting tapes — RMS-11 Utilities 5-3
  prompt — RMS-11 Utilities 5-2
  switches — RMS-11 Utilities 5-3 to 5-4
  terminating — RMS-11 Utilities 5-2
RMSIFL — RMS-11 Introduction 5-2; RMS-11 User's Guide 1-12; RMS-11 Utilities 1-1, 3-1, 4-1 to 4-2
  calculating file work space — RMS-11 Utilities 3-12
  command string — RMS-11 Utilities 3-2 to 3-3
  /DE switch — RMS-11 Utilities 3-7, 3-10, 3-14
  /ER switch — RMS-11 Utilities 3-5 to 3-6
  examples — RMS-11 Utilities 3-14
  global switch — RMS-11 Utilities 3-5
  HELP — RMS-11 Utilities 3-3
  /ID switch — RMS-11 Utilities 3-3, 3-5
  indirect command file — RMS-11 Utilities 3-2
  input file switches — RMS-11 Utilities 3-7
  invoking — RMS-11 Utilities 3-2
  /KR switch — RMS-11 Utilities 3-8 to 3-9
  /LO switch — RMS-11 Utilities 3-6
  messages — RMS-11 Utilities C-1
  /NOER switch — RMS-11 Utilities 3-6
  /NOSO switch — RMS-11 Utilities 3-8 to 3-10
  output file switches — RMS-11 Utilities 3-5
  /PD switch — RMS-11 Utilities 3-6 to 3-7, 3-11
  populating files — RMS-11 User's Guide 6-26 to 6-27
  processing — RMS-11 Utilities 3-9
    building alternate indexes — RMS-11 Utilities 3-12
    command string checking — RMS-11 Utilities 3-9
    loading output file — RMS-11 Utilities 3-10
    reading and sorting input — RMS-11 Utilities 3-9
    sorting alternate key files — RMS-11 Utilities 3-11
    summary — RMS-11 Utilities 3-1
    terminating — RMS-11 Utilities 3-12
  prompt — RMS-11 Utilities 3-2
  sort error codes — RMS-11 Utilities D-1
  sort work files — RMS-11 Utilities 3-1, 3-7, 3-12 to 3-13
  switches — RMS-11 Utilities 3-3, 3-5
  terminating — RMS-11 Utilities 3-2
  /TR switch — RMS-11 Utilities 3-7, 3-11
RMSLIB.OLB (Record Management Services library) — Program Development 1-11

RMSMAC.MLB — Command Language 6-41; Program Development 1-9; RMS-11 Macros 2-20
  RSTS/E — RMS-11 Macros D-3
RMSRES
  and I/O paging operations — RMS-11 User's Guide 8-10
  and overlays — RMS-11 User's Guide 8-6, 8-9
  clustered — RMS-11 User's Guide 8-7
  supervisor mode — RMS-11 User's Guide 8-7
  task building — RMS-11 User's Guide 8-6
RMSRST — RMS-11 Introduction 5-3; RMS-11 User's Guide 1-12; RMS-11 Utilities 1-1, 4-2, 5-4, 6-1, 6-3, 6-8, 7-1
  /BD switch — RMS-11 Utilities 7-8, 7-10
  command string — RMS-11 Utilities 7-2 to 7-3
  data integrity checking — RMS-11 Utilities 7-6, 7-8, 7-11
  examples — RMS-11 Utilities 7-12
  /FR switch — RMS-11 Utilities 7-7
  global switches — RMS-11 Utilities 7-5
  HELP — RMS-11 Utilities 7-3
  /ID switch — RMS-11 Utilities 7-3, 7-5
  indirect command file — RMS-11 Utilities 7-2
  input file switches — RMS-11 Utilities 7-8
  intersystem file transfer — RMS-11 Utilities 1-2, 7-1, 7-10
    /FR switch — RMS-11 Utilities 7-7
    version number conversion — RMS-11 Utilities 7-5
  invoking — RMS-11 Utilities 7-2
  messages — RMS-11 Utilities C-1
  /[NO]CV switch — RMS-11 Utilities 7-5, 7-10
  /[NO]QU switch — RMS-11 Utilities 7-6 to 7-8, 7-12
  /OA switch — RMS-11 Utilities 7-9 to 7-10
  output file switches — RMS-11 Utilities 7-7
  processing — RMS-11 Utilities 7-9
    data integrity checking — RMS-11 Utilities 7-11
    explicit/implicit file-spec — RMS-11 Utilities 7-10
    extended diagnostic messages — RMS-11 Utilities 7-11
    restoration account — RMS-11 Utilities 7-10
    summary listing — RMS-11 Utilities 7-12
  prompt — RMS-11 Utilities 7-2
  query mode — RMS-11 Utilities 7-6 to 7-8, 7-11
  /RA switch — RMS-11 Utilities 7-7, 7-11
  /RC switch — RMS-11 Utilities 7-8, 7-11
  /SE switch — RMS-11 Utilities 7-3, 7-9
  /SL switch — RMS-11 Utilities 7-6, 7-12
  /SU switch — RMS-11 Utilities 7-8
  summary listing — RMS-11 Utilities 7-12
  terminating — RMS-11 Utilities 7-2
$RMSTAT macro — RMS-11 Macros C-3
RMT — System Management 11-2
RO qualifier (MCR) — EDT Editor 4-7
/RO switch — Task Builder 10-34
  ZAP utility — Utilities 15-2
RO symbolic argument — PDP-11 MACRO-11 6-40
Root — RMS-11 User's Guide 1-7
  in a co-tree — Task Builder 3-30
  indexed files — RMS-11 User's Guide 5-5
  null — Task Builder 3-30
    in ODL — Task Builder 3-30
  structure
    overlay — Task Builder 3-21
.ROOT directive — Task Builder 3-22
.ROOT statement
  allocation diagram
    creating from — Task Builder 3-36

ROP field in RAB — RMS-11 Macros 4-1, 4-4 to 4-7
  CONNECT operation — RMS-11 Macros 5-6 to 5-7
  DELETE operation — RMS-11 Macros 5-25
  DISCONNECT operation — RMS-11 Macros 5-27
  FIND operation — RMS-11 Macros 5-49, 5-51 to 5-52, 5-54
  FLUSH operation — RMS-11 Macros 5-56
  FREE operation — RMS-11 Macros 5-58
  GET operation — RMS-11 Macros 5-60 to 5-61, 5-63 to 5-64, 5-67 to 5-68
  NXTVOL operation — RMS-11 Macros 5-70
  offset — RMS-11 Macros 6-115
  PUT operation — RMS-11 Macros 5-91 to 5-92, 5-95 to 5-96
  READ operation — RMS-11 Macros 5-98, 5-100
  REWIND operation — RMS-11 Macros 5-114
  SPACE operation — RMS-11 Macros 5-120
  summary
    RB$ASY mask — RMS-11 Macros 6-131
    RB$EOF mask — RMS-11 Macros 6-132
    RB$FDL mask — RMS-11 Macros 6-133
    RB$KGE mask — RMS-11 Macros 6-134
    RB$KGT mask — RMS-11 Macros 6-135
    RB$LOA mask — RMS-11 Macros 6-136
    RB$LOC mask — RMS-11 Macros 6-137
    RB$MAS mask — RMS-11 Macros 6-138
    RB$UIF mask — RMS-11 Macros 6-139
  TRUNCATE operation — RMS-11 Macros 5-122
  UPDATE operation — RMS-11 Macros 5-124
  WRITE operation — RMS-11 Macros 5-127, 5-129
Round-robin scheduler — Introduction 5-8, Gloss-29
Rounding
  floating-point — PDP-11 MACRO-11 6-34
/RP switch
  LBR utility — Utilities 10-23
RP03 — I/O Drivers 5-1
RP04 — I/O Drivers 5-1, 5-3
RP04/05/06 tape kit
  copying
    on-line — System Generation (11M) 2-32
    stand-alone — System Generation (11M) 2-6
RP05 — I/O Drivers 5-3
RP06 — I/O Drivers 5-3
/RPA keyword
  SET command — MCR Operations 3-195
    VMR — System Management 10-58
RPOI$ — Executive 5-129
/RPRI keyword
  ALTER command — MCR Operations 3-15
%RPT — Error Logging 5-22
RPT — Error Logging 1-1
  command line — Error Logging 3-2
    input file — Error Logging 3-2
    multiple qualifiers — Error Logging 3-3
    report file — Error Logging 3-2
    switches — Error Logging 3-2
    universal library — Error Logging 3-2
  /DA switch — Error Logging 3-5, 3-8
  Date switch — Error Logging 3-5, 3-8
  /DE switch — Error Logging 3-5, 3-8
  Device switch — Error Logging 3-5, 3-8
    multiple qualifiers — Error Logging 3-4
  error log control file — Error Logging 1-4
  error log file — Error Logging 1-4
  Error log packet
    number — Error Logging 3-1
  error log packets — Error Logging 1-4

RPT (Cont.)
  error type definition — Error Logging 1-5
  /F switch — Error Logging 3-5, 3-11
  Format switch — Error Logging 3-5, 3-11
    brief report — Error Logging 3-11
    full report — Error Logging 3-15
    No report — Error Logging 3-19
    Register report — Error Logging 3-18
  information required — Error Logging 3-2
    format selection — Error Logging 3-2
    packet selection — Error Logging 3-2
  interpreter — Error Logging 5-1
  /P switch — Error Logging 3-5, 3-8
  Packet number switch — Error Logging 3-5, 3-8
    multiple qualifiers — Error Logging 3-4
  /R switch — Error Logging 3-6, 3-20
  report information selection — Error Logging 1-4 to 1-5
  Report switch — Error Logging 3-6, 3-20
  /SE switch — Error Logging 3-6, 3-9
  Serial number switch — Error Logging 3-6, 3-9
    multiple qualifiers — Error Logging 3-4
  subswitch summary — Error Logging 3-5
  switch summary — Error Logging 3-5
  /T switch — Error Logging 3-7, 3-9
  Type switch — Error Logging 3-7, 3-9
    multiple qualifiers — Error Logging 3-4
  /V switch — Error Logging 3-7, 3-10
  Volume label switch — Error Logging 3-7, 3-10
  /W switch — Error Logging 3-7, 3-21
  Width switch — Error Logging 3-7, 3-21
RPT control function — Error Logging 5-21
RPT default command line — Error Logging 3-4
  Date switch — Error Logging 3-4
  Device switch — Error Logging 3-4
  Format switch — Error Logging 3-4
  Packet switch — Error Logging 3-4
  Type switch — Error Logging 3-4
  Width switch — Error Logging 3-4
RPT default file specification — Error Logging 3-3
RPT report switch
  format packet — Error Logging 3-5
  select packet — Error Logging 3-5
RPTBLD.BLD file — Error Logging 3-2
$RQCB (Request core blocks) — System Library 7-3
$RQCB system routine — RMS-11 Macros 2-20
RQST$ — Executive 5-133
$RQVCB (Request virtual core block) — System Library 8-20
RREF$ — Executive 5-136
RRN — RMS-11 Introduction 3-5, 3-12, 3-14 to 3-15
  See also BKT field in RAB
  relative files — RMS-11 User's Guide 4-1
  sequential files — RMS-11 User's Guide 3-2
RRV — RMS-11 User's Guide 5-12, 5-16
/RS keyword
  MOUNT command — MCR Operations 3-123
/RS switch
  FLX utility — Utilities 4-4
  SLP utility — Utilities 13-16
RS03 — I/O Drivers 5-1
RS04 — I/O Drivers 5-1
RSA field in NAM block — RMS-11 Macros 3-9
  offset — RMS-11 Macros 6-94
  SEARCH operation — RMS-11 Macros 5-116
  summary — RMS-11 Macros 6-103
RSD — System Generation (11S) 2-22

RSDV05 System Generation (11S) 1-1, 2-1
  building System Generation (11S) 4-9
  size System Generation (11S) 1-3
RSDV1H System Generation (11S) 1-1, 2-1
  building System Generation (11S) 4-9
  size System Generation (11S) 1-3
RSDV52 System Generation (11S) 1-1, 2-1
  building System Generation (11S) 4-9
  size System Generation (11S) 1-3
/RSI keyword
  RUN command MCR Operations 3-150
    VMR System Management 10-36
RSL field in NAM block
  CREATE operation RMS-11 Macros 5-21
  ENTER operation RMS-11 Macros 5-38
  ERASE operation RMS-11 Macros 5-43
  offset RMS-11 Macros 6-94
  OPEN operation RMS-11 Macros 5-81
  PARSE operation RMS-11 Macros 5-87
  REMOVE operation RMS-11 Macros 5-105
  RENAME operation RMS-11 Macros 5-112
  SEARCH operation RMS-11 Macros 5-116 to 5-117
  summary RMS-11 Macros 6-104
RSS field in NAM block
  offset RMS-11 Macros 6-94
  SEARCH operation RMS-11 Macros 5-116
  summary RMS-11 Macros 6-105
RSTS/E RMS-11
  contrasted with PRO/RMS-11 RMS-11 Macros D-1
  contrasted with RSX-11 RMS-11 RMS-11 Macros D-3
  remote access RMS-11 User's Guide B-3
RSTS/E system prompts and CLI EDT Editor 2-3
RSUM$ Executive 5-139
RSX-11M system prompts and CLI EDT Editor 2-3
RSX-11M versus RSX-11M-PLUS Introduction 5-3, Gloss-3
RSX-11M-PLUS versus RSX-11M Introduction 5-3, Gloss-3
RSX-11M/M-PLUS DCL Command Language 1-19
RSX-11M/M-PLUS RMS-11
  contrasted with PRO/RMS-11 RMS-11 Macros D-3
  contrasted with RSTS/E RMS-11 RMS-11 Macros D-3
  remote access RMS-11 User's Guide B-3
RSX-11S
  fixing tasks with PLAS support Release Notes 3-1
  host hardware configuration
    requirements Release Notes 3-1
  new features Release Notes 3-1
  SYSGEN
    example Release Notes 3-7
    on RSX-11M-PLUS host system Release Notes 3-24
    on VAX/VMS host system Release Notes 3-24
  system generation
    on RSX-11M-PLUS V1.0 host Release Notes 3-2
  System Generation and
    Installation Guide
    note to Release Notes 3-3
  VMR support restriction Release Notes 3-2
RSX11.SYS
  See Account file
<RSX11D> symbol MCR Operations 4-10
RSX11M.OLB
  definition System Generation (11M) 5-1
RSX11M.STB Crash Dump Analyzer 1-1, 2-9
RSX11S.OLB
  inserting
    data base object module System Generation (11S) 4-5

RSX11S.OLB
  inserting (Cont.)
    device driver — System Generation (11S) 4-5
RSXBLD.CMD — System Generation (11S) 4-5
  definition — System Generation (11M) 5-1
RSXMAC.SML — Command Language 6-41; Executive 1-5; Program Development 1-5, 1-9 to 1-10, 2-7
RSXMC.MAC — System Generation (11S) 4-5
RSXTIME — Error Logging 5-7
RSZ field in RAB — RMS-11 Macros 4-7, 4-13
  GET operation — RMS-11 Macros 5-61, 5-65, 5-68
  offset — RMS-11 Macros 6-115
  PUT operation — RMS-11 Macros 5-92, 5-95
  READ operation — RMS-11 Macros 5-99, 5-101
  summary — RMS-11 Macros 6-140
  UPDATE operation — RMS-11 Macros 5-124
  WRITE operation — RMS-11 Macros 5-127, 5-129
/RT switch
  FLX utility — Utilities 4-4
RT-11
  device support
    FLX utility — Utilities 4-2
  file copying
    FLX utility — Utilities 4-3
  volume
    deleting
      FLX utility — Utilities 4-12
    directory listing
      FLX utility — Utilities 4-10
    initializing
      FLX utility — Utilities 4-12
RT02 — I/O Drivers 2-4A, 3-3
RT02-C — I/O Drivers 3-3
  control function — I/O Drivers 2-40A, 3-30
$$RTQ
  PSECT — Task Builder 5-52 to 5-53
  reserved PSECT name — Task Builder E-3
$$RTR
  PSECT — Task Builder 5-52 to 5-53
  reserved PSECT name — Task Builder E-4
$$RTS
  PSECT — Task Builder 5-53
  reserved PSECT name — Task Builder E-4
RTV field in FAB
  CREATE operation — RMS-11 Macros 5-13
  offset — RMS-11 Macros 6-23
  OPEN operation — RMS-11 Macros 5-75
  RSTS/E — RMS-11 Macros D-3
  summary — RMS-11 Macros 6-62
RUBOUT
  line printer — I/O Drivers 10-6
RUN command — Introduction 3-11, 4-2, 4-9 to 4-10, 4-13, 5-5, Gloss-17; Command Language 7-1, 7-4 to 7-16, 7-26, 7-60, 9-30, 9-37; Program Development 4-7, 5-2, 7-6; MCR Operations 3-148
  Basic MCR — System Generation (11S) 2-2
  command line format — MCR Operations 3-148 to 3-151
  error message — MCR Operations 3-156
  example — MCR Operations 3-155
  keyword
    /CKP — MCR Operations 3-152
    /CMD — MCR Operations 3-152
    /EST — MCR Operations 3-152

RUN command
  keyword (Cont.)
    /INC — MCR Operations 3-152
    /IOP — MCR Operations 3-153
    /PAR — MCR Operations 3-153
    /PMD — MCR Operations 3-153
    /PRI — MCR Operations 3-154
    /RSI — MCR Operations 3-150
    /SLV — MCR Operations 3-154
    /TASK — MCR Operations 3-154
    /UIC — MCR Operations 3-148, 3-155
  VMR — System Management 10-36
    command line format — System Management 10-36 to 10-38
    example — System Management 10-39
    keyword
      /RSI — System Management 10-36
      /UIC — System Management 10-37
Run Task directive — Executive 5-140
RUN$ — Executive 5-140
Run-time support
  overlaid region — Task Builder 5-12 to 5-13
    autoload — Task Builder 5-13
    autoload call overhead — Task Builder 5-13
    FTB and old libraries — Task Builder 5-13
    named program sections — Task Builder 5-13
Running task — Introduction 4-2
RUNTIME command
  IOX — System Management 4-55
RVB field in KEY block
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-68
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-91
RVN field in DAT block
  DISPLAY operation — RMS-11 Macros 5-32
  offset — RMS-11 Macros 6-14
  OPEN operation — RMS-11 Macros 5-81
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-21
RVN field in NAM block
  RSX-11 — RMS-11 Macros D-4
/RW switch
  DMP utility — Utilities 11-7
  DSC utility — Utilities 8-15
  FLX utility — Utilities 4-8
  PIP utility — Utilities 3-36
  RMSBCK utility — RMS-11 Utilities 6-7
RW symbolic argument — PDP-11 MACRO-11 6-40
RX01 — I/O Drivers 5-4
RX02 — I/O Drivers 5-4
RX50 — I/O Drivers 5-4A

S

S command — ODT 2-10, 3-3
  description — EDT Editor 8-16
  example — EDT Editor 2-42
S register — ODT 2-6, 5-3
Sample program — I/O Operations D-1
SAV symbolic argument — PDP-11 MACRO-11 6-42
$SAVAL (Save all registers) — System Library 2-2
Save attribute — Task Builder 2-4
SAVE command — MCR Operations 3-157
  command line format — MCR Operations 3-159
  error message — MCR Operations 3-160
  example — MCR Operations 3-160

SAVE command (Cont.)
  keyword
    /MOU — MCR Operations 3-160
    /SFILE — MCR Operations 3-160
    /WB — MCR Operations 3-159
  requirement — MCR Operations 3-158
  RMSDES utility — RMS-11 Utilities 2-13, 2-18, 2-27
    setting attributes — RMS-11 Utilities 2-21
  valid device — MCR Operations 3-157
  VMR — System Management 10-40
    command line format — System Management 10-40
    example — System Management 10-41
    keyword
      /BOOT — System Management 10-40
      /DENS — System Management 10-40
SAve command
  EDI editor — Utilities 2-44
.SAVE directive — PDP-11 MACRO-11 6-47 to 6-48
SAVE qualifier — EDT Editor 7-14
  line editing — EDT Editor 7-8
  QUIT — EDT Editor 3-2, 3-4
Saved answer file
  See also Standard Function System
  aborted — System Generation (11M) 3-10
  creating — System Generation (11M) 3-10
  default name — System Generation (11M) 4-6
  definition — System Generation (11M) 3-9
  input
    Phase I — System Generation (11M) 4-5
    Phase II — System Generation (11M) 5-5
  naming conventions — System Generation (11M) 3-10
  output
    Phase I — System Generation (11M) 4-6
    Phase II — System Generation (11M) 5-6
  purpose — System Generation (11M) 3-10
  restrictions — System Generation (11M) 3-10
Saved answer files
  using V4.0 — Release Notes 1-22
Saved stack pointer — Crash Dump Analyzer 3-20
Saving edit — EDT Editor 5-9
  See also EXIT command
Saving the design
  See also Description file
  RMSDES utility — RMS-11 Utilities 2-22, 2-27
.SAVR1 (Save registers 1-5) — System Library 2-5
$SAVRG (Save registers 3-5) — System Library 2-3
$SAVVR (Save registers 0-2) — System Library 2-4
/SB switch
  DMP utility — Utilities 11-8
  PIP utility — Utilities 3-37
.SBTTL directive — PDP-11 MACRO-11 6-15 to 6-16
  Program Development 2-6

SC command
  EDI editor — Utilities 2-44
SCAA$ — Executive 5-145
/SCB — Crash Dump Analyzer 2-2
SCB
  description — Writing I/O Driver 4-19
  relationship of
    with I/O control blocks — Writing I/O Driver 2-6
  required field — Writing I/O Driver 3-7
  role of
    in I/O data structure — Writing I/O Driver 2-20
SCB field
  S.BMSK — Writing I/O Driver 4-20
  S.BMSV — Writing I/O Driver 4-20

SCB field (Cont.)
  S.CON — Writing I/O Driver 3-7, 4-22
  S.CSR — Writing I/O Driver 3-7, 4-22
  S.CTM — Writing I/O Driver 4-21
  S.FRK — Writing I/O Driver 3-7, 4-23
  S.ITM — Writing I/O Driver 3-7, 4-21 to 4-22
  S.LHD — Writing I/O Driver 3-7 to 3-8, 4-2, 4-20
  S.MPR — Writing I/O Driver 3-7, 4-23, B-1 to B-2
  S.PKT — Writing I/O Driver 4-23
  S.PRI — Writing I/O Driver 3-7, 4-21
  S.RCNT — Writing I/O Driver 4-20
  S.ROFF — Writing I/O Driver 4-20
  S.STS — Writing I/O Driver 3-7, 4-22
  S.VCT — Writing I/O Driver 3-7, 4-21
SCBDF$ — Crash Dump Analyzer B-38
Scheduling
  round-robin interval — System Generation (11M) 4-38
    highest priority — System Generation (11M) 4-39
    lowest priority — System Generation (11M) 4-39
  task — Command Language 7-12 to 7-15, 7-60, 9-30, 9-37
SCLI$ — Executive 5-148
Scope
  See Terminal, video
Scope-code — Task Builder 2-4, 2-7
Scratch disk — Command Language 5-10 to 5-11
Screen
  refreshing — EDT Editor 5-8
  shifting image of — EDT Editor 8-18
  showing parameters of — EDT Editor 9-17
  width — EDT Editor 9-6
Scroll — Introduction Gloss-29
SCROLL key — Command Language 3-14
  VT52 — Introduction 1-17
Scrolling — EDT Editor 2-28
/SD switch
  PIP utility — Utilities 3-37
SDAT$ — Executive 5-150
SDRC$ — Executive 5-152
SDRP$ — Executive 5-155
/SE switch — Error Logging 3-6, 3-9; Task Builder 10-35
  RMSRST utility — RMS-11 Utilities 7-3, 7-9
Search
  argument register — ODT 2-6, 5-3, 6-2
  command — ODT 6-3
  limit register — ODT 2-6, 5-3, 6-1
  mask register — ODT 2-6, 5-3, 6-2
  memory — ODT 2-8, 2-10, 6-3
  setting direction of — EDT Editor 2-42, 5-21, 8-5 to 8-6
  showing parameters of — EDT Editor 9-17
  word or byte — ODT 2-11, 6-3
SEARCH & CHANGE command
  EDI editor — Utilities 2-44
Search command — ODT 2-11
$SEARCH macro — RMS-11 Macros 5-116
  example — RMS-11 Macros 7-7, 7-15
SEARCH operation — RMS-11 Introduction 4-1; RMS-11 User's Guide 1-17
  BDB requirement — RMS-11 Macros 2-8
  I/O buffer requirement — RMS-11 Macros 2-7
  IFAB requirement — RMS-11 Macros 2-5
  remote access — RMS-11 User's Guide B-1
  $SEARCH macro — RMS-11 Macros 5-116

SEARCH operation (Cont.)
  wildcard loop — RMS-11 Macros 3-9
    explicit — RMS-11 Macros 3-11
    implicit — RMS-11 Macros 3-9 to 3-10
SEARCH statement — Error Logging 5-40
Search time
  indexed files — RMS-11 User's Guide 5-8
Searching
  text
    EDT — Introduction 2-13
Secondary file
  appending data to — MCR Operations 4-44
  closing — MCR Operations 4-29
  opening — MCR Operations 4-44
    for reading — MCR Operations 4-45
  outputting text to — MCR Operations 4-29
Secondary index data record
  See SIDR
Secondary pool — Introduction Gloss-29
Secondary pool dump — Crash Dump Analyzer 3-45
Secondary pool switch — Crash Dump Analyzer 2-5
Section
  Phase I
    Executive Options — System Generation (11M) 4-22
    Host Configuration — System Generation (11M) 4-20
    Peripheral Options — System Generation (11M) 4-64
    Setup — System Generation (11M) 4-3
    System Options — System Generation (11M) 4-56
    Target Configuration — System Generation (11M) 4-10
    Terminal Driver Options — System Generation (11M) 4-46
  Phase II
    Executive Task-Build — System Generation (11M) 5-8
    Loadable Driver Task-Build — System Generation (11M) 5-9
    Privileged Task-Build — System Generation (11M) 5-12
    Setup — System Generation (11M) 5-4
    System VMR — System Generation (11M) 5-14
SECTION function — EDT Editor 5-20
Section, design buffer
  RMSDES utility — RMS-11 Utilities 2-1, 2-16, 2-29
    area section — RMS-11 Utilities 2-29, 2-42
    file section — RMS-11 Utilities 2-29, 2-31
    key section — RMS-11 Utilities 2-29, 2-38
    key segments — RMS-11 Utilities 2-41
    record section — RMS-11 Utilities 2-29, 2-36
    system section — RMS-11 Utilities 2-29 to 2-30
Sector — RMS-11 Introduction 2-1
  See also Placement control
Seek
  overlapped — I/O Drivers 5-7
SEG0_POSITION
  RMSDES utility — RMS-11 Utilities 2-42
Segment
  autoloadable
    data — Task Builder 4-7
    global symbol in — Task Builder 4-4
  call — Task Builder 3-10
    to up-tree — Task Builder 4-6
  definition of a — Task Builder 3-1
  descriptor — Task Builder B-19
    in overlay — Task Builder 3-20
  limiting number
    reducing overhead — Task Builder F-4
  loading
    as part of co-tree — Task Builder 4-2
    when called — Task Builder 4-4, 4-6
  making autoloadable — Task Builder 4-3
  mapping — Task Builder 2-10

Segment
  mapping (Cont.)
    disk-resident — Task Builder 2-11
    memory-resident — Task Builder 2-12
  multiple — Task Builder 3-5
    global symbol in — Task Builder 3-16
    global symbol resolution — Task Builder 3-17
    symbol resolution — Task Builder 3-16
  name
    applying autoload indicator to — Task Builder 4-3
    .FCTR directive argument — Task Builder 3-25
  null
    in ODL — Task Builder 3-30
  overlay
    arrangement — Task Builder 3-15
    root structure — Task Builder 3-21
    symbol processing — Task Builder 3-17
  processing order — Task Builder 3-17
  single — Task Builder 3-4, 3-8
Segmented key — RMS-11 Introduction 3-10; RMS-11 User's Guide 6-7

SEGn_LENGTH
  RMSDES utility — RMS-11 Utilities 2-42
SEGn_POSITION
  RMSDES utility — RMS-11 Utilities 2-42
SEL command — EDT Editor 8-17
SEL key — Command Language 3-12
SELECT command
  IOX — System Management 4-56
SELECT function — EDT Editor 2-12, 5-33
  example with CUT and PASTE — EDT Editor 5-34
  reverse — EDT Editor 5-52
SELECT PRIMARY command
  EDI editor — Utilities 2-45
SELECT range
  marking text with — EDT Editor 2-12, 5-34
Select recovery
  magnetic tape — I/O Drivers 8-13
SELECT SECONDARY command
  EDI editor — Utilities 2-46
SELECT statement — Error Logging 5-34 to 5-35
SELTM1 — Error Logging 4-4
Semicolon (;) — ODT 2-5; Task Builder 1-8

Send By Reference directive — Executive 5-188
Send Data directive — Executive 5-150
Send Data Request and Pass Offspring Control Block directive — Executive 5-155
SEND directive
  enabling for your task — Task Builder 10-35
Send Message directive — Executive 5-162
Send, Request And Connect directive — Executive 5-152
Send/Receive By Reference directive — System Generation (11M) 4-25
$SEP
  predefined syntax element in MML — System Management 12-44
Separating character — PDP-11 MACRO-11 3-3
Separator
  dot (.) — ODT 2-5
  Radix-50 (*) — ODT 2-5
  semicolon (;) — ODT 2-5
SEQ argument to ORG$ macro — RMS-11 Macros 2-3
SEQ symbolic argument — PDP-11 MACRO-11 6-10

SEQUENCE qualifier
  description — EDT Editor 6-3
  fixed line number — EDT Editor 6-4
  line editing — EDT Editor 7-8
SEQUENCE_NUMBERS argument — PDP-11 MACRO-11 8-11
Sequencing line
  See RESEQUENCE command
Sequential access — Introduction 5-12, Gloss-29; RMS-11 Introduction 2-4 to 2-5; RMS-11 User's Guide 1-7 to 1-8
  block — RMS-11 Introduction 3-12; RMS-11 User's Guide 1-20
  FIND — RMS-11 User's Guide 1-16
  GET — RMS-11 User's Guide 1-16
  PUT — RMS-11 User's Guide 1-16
  record — RMS-11 Introduction 3-11; RMS-11 User's Guide 1-12
  to indexed files — RMS-11 User's Guide 5-16
  to relative files — RMS-11 User's Guide 4-1
  to sequential files — RMS-11 User's Guide 3-2
Sequential block access
  See BKT field in RAB
Sequential device
  See FB$SQD mask in DEV field
Sequential file organization — RMS-11 Introduction 3-4; RMS-11 User's Guide 1-3, 1-11
  See also FB$SEQ code
  access declarations — RMS-11 User's Guide 3-6
  allocation
    DEQ — RMS-11 User's Guide 3-4
    initial — RMS-11 User's Guide 3-4
  and remote access — RMS-11 User's Guide B-3
  asynchronous operations — RMS-11 User's Guide 3-14
  cells — RMS-11 User's Guide 3-2
  CONNECT operation — RMS-11 User's Guide 3-7
  declaring with ORG$ macro — RMS-11 Macros 2-3
  deferred write — RMS-11 User's Guide 3-14
  design — RMS-11 User's Guide 3-1
    allocation — RMS-11 User's Guide 3-4
    contiguity — RMS-11 User's Guide 3-5
    medium — RMS-11 User's Guide 3-3
    record format — RMS-11 User's Guide 3-3
  directory operations — RMS-11 User's Guide 3-15
  DISCONNECT operation — RMS-11 User's Guide 3-7
  end-of-block indicators — RMS-11 User's Guide 3-2
  end-of-file — RMS-11 User's Guide 3-2
  FCS-11 compatibility — RMS-11 User's Guide 3-2
  file operations — RMS-11 User's Guide 3-15
  FIND operation — RMS-11 User's Guide 3-7
  FLUSH operation — RMS-11 User's Guide 3-9
  GET operation — RMS-11 User's Guide 3-9, 3-13 to 3-14
  I/O techniques — RMS-11 User's Guide 3-14
  MBC — RMS-11 User's Guide 3-15
  multiple access streams — RMS-11 User's Guide 3-15
  multiple buffers — RMS-11 User's Guide 3-14
  PUT operation — RMS-11 User's Guide 3-10, 3-13
  random access
    by key — RMS-11 User's Guide 3-2
    by RFA — RMS-11 User's Guide 3-2
  record operations — RMS-11 User's Guide 3-7
  record size — RMS-11 User's Guide 3-2
  record transfer modes — RMS-11 User's Guide 3-13
    locate mode — RMS-11 User's Guide 3-14, 4-13
    move mode — RMS-11 User's Guide 3-13 to 3-14
  REWIND operation — RMS-11 User's Guide 3-11
  RRN — RMS-11 Introduction 3-5

Sequential file organization
(Cont.)
sequential access — RMS-11 User's Guide 3-2
shared access — RMS-11 User's Guide 3-5
block access — RMS-11 User's Guide 3-6
record access — RMS-11 User's Guide 3-6
record structured files — RMS-11 User's Guide 3-6
with undefined records — RMS-11 User's Guide 3-6
sharing declarations — RMS-11 User's Guide 3-6
stream operations — RMS-11 User's Guide 3-7
structure — RMS-11 User's Guide 3-1
conceptual — RMS-11 User's Guide 3-2
physical — RMS-11 User's Guide 3-1
TRUNCATE operation — RMS-11 User's Guide 3-12
UPDATE operation — RMS-11 User's Guide 3-12 to 3-14
user-provided interlocks — RMS-11 User's Guide 2-7, 3-6
Sequential record access
See RB$SEQ code in RAC field
Serial command processing
CLI — System Management 11-9
Serial number switch — Error Logging 3-6, 3-9
Serial, nondisk device (RMSIFL) — RMS-11 Utilities 3-1, 3-12
Service routine
SST — Executive 2-5
SET
/PLCTL
establishing
pool limits — System Management 13-2, 13-12 to 13-13
task priority — System Management 13-13
parameter defaults — System Management 13-13
SET and SHOW parameter — EDT Editor 9-1
SET command — Introduction 1-18
MCR Operations 3-167
command line format — MCR Operations 3-168
description — EDT Editor 1-9, 9-2
error message — MCR Operations 3-209
function — EDT Editor 9-1
function of — EDT Editor 9-1
keyword
/ABAUD — MCR Operations 3-171
/BRO — MCR Operations 3-172
/BUF — MCR Operations 3-173
/CLI — MCR Operations 3-174
/COLOG — MCR Operations 3-174
/CRT — MCR Operations 3-174
/DCL — MCR Operations 3-175
/EBC — MCR Operations 3-176
/ECHO — MCR Operations 3-177
/ESCSEQ — MCR Operations 3-178
/FDX — MCR Operations 3-179
/FORMFEED — MCR Operations 3-180
/HFILL — MCR Operations 3-181
/HHT — MCR Operations 3-181
/HOLD — MCR Operations 3-182
/LINES — MCR Operations 3-184
/LOGON — MCR Operations 3-184
/LOWER — MCR Operations 3-184
/MAIN — MCR Operations 3-185
/MAXEXT — MCR Operations 3-187
/MAXPKT — MCR Operations 3-188
/MCR — MCR Operations 3-189
/NETUIC — MCR Operations 3-189
/PLCTL — MCR Operations 3-190
/POOL — MCR Operations 3-191
/PRIV — MCR Operations 3-191
/PUB — MCR Operations 3-192

SET command
  keyword (Cont.)
    /REMOTE MCR Operations 3-193
    /RPA MCR Operations 3-195
    /SLAVE MCR Operations 3-197
    /SPEED MCR Operations 3-198
    /SUB MCR Operations 3-199
    /SYSUIC MCR Operations 3-200
    /TERM MCR Operations 3-201
    /TOP MCR Operations 3-202
    /TYPEAHEAD MCR Operations 3-204
    /UIC MCR Operations 3-205
    /VFILL MCR Operations 3-206
    /WCHK MCR Operations 3-207
    /WRAP MCR Operations 3-208
  list of EDT Editor 9-1 to 9-2
  option
    nonprivileged MCR Operations 3-167
    privileged MCR Operations 3-167
  RMSDES utility RMS-11 Utilities 2-13, 2-17, 2-20, 2-33
    allocation RMS-11 Utilities 2-10
    defining areas by default RMS-11 Utilities 2-17, 2-43
    defining areas explicitly RMS-11 Utilities 2-43
    INDEX_AREA attribute RMS-11 Utilities 2-41
    LEVEL1_INDEX_AREA attribute RMS-11 Utilities 2-41
    PROTECTION attribute RMS-11 Utilities 2-33
    with GET RMS-11 Utilities 2-25
  SET CASE EDT Editor 9-2
  SET CURSOR EDT Editor 9-3
  SET ENTITY EDT Editor 9-4
  SET KEYPAD EDT Editor 2-44, 9-5
  SET LINES number EDT Editor 9-5
  SET MODE EDT Editor 9-5
  SET MODE CHANGE EDT Editor 9-5
  SET MODE LINE EDT Editor 9-5
  SET NOKEYPAD EDT Editor 2-36, 7-2, 8-1, 9-5
  SET NONUMBERS EDT Editor 9-6
  SET NOQUIET EDT Editor 9-6
  SET NOTAB EDT Editor 9-8
  SET NOTRUNCATE EDT Editor 9-12
  SET NOVERIFY EDT Editor 9-13
  SET NOWRAP EDT Editor 9-14
  SET NUMBERS EDT Editor 9-6
  SET QUIET EDT Editor 9-6
  SET SCREEN width EDT Editor 9-6
  SET SEARCH EDT Editor 9-7
  SET SEARCH BOUNDED EDT Editor 9-7
  SET SEARCH END EDT Editor 9-7
  SET SEARCH EXACT EDT Editor 9-7
  SET SEARCH UNBOUNDED EDT Editor 9-7
  SET TAB EDT Editor 9-8
  SET TERMINAL EDT Editor 9-12
  SET TRUNCATE EDT Editor 9-12
  SET VERIFY EDT Editor 9-13
  SET WRAP EDT Editor 5-50, 9-14
  VMR System Management 10-43
    command line format System Management 10-44
    example System Management 10-66
    keyword
      /ABAUD System Management 10-46
      /BOT System Management 10-47
      /BRO System Management 10-48
      /BUF System Management 10-48
      /CRT System Management 10-48
      /EBC System Management 10-48
      /ECHO System Management 10-49

SET command
  VMR
    keyword (Cont.)
      /ESCSEQ — System Management 10-49
      /FDX — System Management 10-49
      /FORMFEED — System Management 10-50
      /HFILL — System Management 10-50
      /HHT — System Management 10-50
      /LINES — System Management 10-51
      /LOGON — System Management 10-51
      /LOWER — System Management 10-51
      /MAIN — System Management 10-51
      /MAXEXT — System Management 10-53
      /NETUIC — System Management 10-53
      /PLCTL — System Management 10-55
      /POOL — System Management 10-56
      /POOLSIZE — System Management 10-57
      /PRIV — System Management 10-57
      /PUB — System Management 10-57
      /REMOTE — System Management 10-57
      /RPA — System Management 10-58
      /SLAVE — System Management 10-59
      /SPEED — System Management 10-59
      /SUB — System Management 10-60
      /SYSUIC — System Management 10-61
      /TERM — System Management 10-62
      /TOP — System Management 10-63
      /TYPEAHEAD — System Management 10-64
      /UIC — System Management 10-64
      /VFILL — System Management 10-64
      /WCHK — System Management 10-65
      /WRAP — System Management 10-65
Set Command Line Interpreter
    directive — Executive 5-148
SET DAYTIME command — Command Language 2-1, 8-1, 9-31
SET DEBUG command — Introduction 1-5, 4-2; Command Language 1-2, 1-12 to 1-13, 2-7
SET DEFAULT command — Command Language 2-4, 4-77 to 4-78, 5-72 to 5-73, 9-31
SET DEVICE command — Command Language 5-9, 5-74 to 5-76, 9-31
Set Event Flag directive — Executive 5-159
SET GROUPFLAGS command — Command Language 6-91 to 6-92, 9-32
$SET macro — RMS-11 Macros 2-11
SET NODEBUG command — Command Language 1-2, 1-12 to 1-13, 2-7
SET NOPARTITION command — Command Language 7-38 to 7-43, 9-32
SET parameter
  SHOW parameter — EDT Editor 9-1
SET PARTITION command — Command Language 7-38 to 7-43, 9-32
SET PRIORITY command — Command Language 7-59 to 7-60, 9-33
SET PROTECTION command — Introduction 5-6; Command Language 2-6, 4-79 to 4-82, 9-33
SET QUEUE command
  example — Batch and Queue 2-21
  file format
    qualifiers — Batch and Queue 2-19
  job format
    qualifiers — Batch and Queue 2-19
SET QUEUE/ENTRY command — Command Language 9-33
SET QUEUE/JOB command — Command Language 9-34

SET statement — Error Logging 5-31
SET SYSTEM command — Command Language 8-3 to 8-4, 9-34
Set System Time directive — Executive 5-195
SET SYSTEM/DIRECTORY command — Command Language 2-6
SET TERMINAL command — Introduction 1-16, 1-18
Command Language 2-2 to 2-3, 3-33 to 3-42, 9-35
SET TERMINAL/HOLD_SCREEN command — Command Language 3-14, 3-19
SET TIME command — Command Language 2-1, 8-1, 9-31
.SETD directive — MCR Operations 4-49
example — MCR Operations 4-50
format — MCR Operations 4-49
.SETF directive — MCR Operations 4-48
example — MCR Operations 4-48
format — MCR Operations 4-48
SETF$ — Executive 5-159
$SETGSA macro — RMS-11 Macros 2-18
.SETL directive — MCR Operations 4-48
example — MCR Operations 4-48
format — MCR Operations 4-48
.SETN directive — MCR Operations 4-49
example — MCR Operations 4-49
format — MCR Operations 4-49
.SETO directive — MCR Operations 4-49
example — MCR Operations 4-50
format — MCR Operations 4-49
.SETS directive — MCR Operations 4-50
example — MCR Operations 4-50
format — MCR Operations 4-50
.SETT directive — MCR Operations 4-48
example — MCR Operations 4-48
format — MCR Operations 4-48
SETTIM — System Generation (11S) 2-1, 2-21
generating — System Generation (11S) 4-8
Setting attributes (RMSDES)
See Attribute
Setting control characteristics
SET and SHOW — EDT Editor 9-1
Setting tab
keypad editing — EDT Editor 5-53
nokeypad editing — EDT Editor 8-21
/SF switch
DMP utility — Utilities 11-8
/SFILE keyword
SAVE command — MCR Operations 3-160
SFPA$ — Executive 5-160
/SG switch — Task Builder 10-36
$$SGD0
PSECT — Task Builder 5-53
reserved PSECT name — Task Builder E-4
$$SGD1
reserved PSECT name — Task Builder E-4
$$SGD2
PSECT — Task Builder 5-53
reserved PSECT name — Task Builder E-4
SGNBLDDRV.CMD — System Generation (11M) 3-5
SGNKLAB.CMD — System Generation (11M) 3-5
SGNPARM.CMD
definition — System Generation (11M) 5-1
description — System Generation (11M) 7-2
question — System Generation (11M) 5-4
SGNSTAND.CMD — System Generation (11M) 3-11
/SH switch — Error Logging 2-4, 2-10 to 2-11
Task Builder 10-37
/SHARE keyword
MOUNT command — MCR Operations 3-124
Shareable device — Command Language 5-9, 5-13

Shareable task — Command Language 6-73
Shareable volume — Command Language 5-31, 5-38
Shared access — RMS-11 Introduction 2-4; RMS-11 User's Guide 1-17
  See also Access sharing
  See also SHR field in FAB
  access declarations — RMS-11 User's Guide 2-6
    read-only — RMS-11 User's Guide 2-6
    read/write — RMS-11 User's Guide 2-6
  and high-level languages — RMS-11 User's Guide 2-7
  application design consideration — RMS-11 User's Guide 2-5
  bucket locking — RMS-11 User's Guide 2-8
  deferred write to relative files — RMS-11 User's Guide 4-14
  multiple access streams — RMS-11 User's Guide 2-9 to 2-10
  programming considerations — RMS-11 User's Guide 2-10
  sharing declarations — RMS-11 User's Guide 2-7
    no sharing — RMS-11 User's Guide 2-7
    read-only — RMS-11 User's Guide 2-7
    read/write — RMS-11 User's Guide 2-7
    user-provided interlocks — RMS-11 User's Guide 2-7
  system protection codes — RMS-11 User's Guide 2-5
  to indexed files — RMS-11 User's Guide 7-1
    block access — RMS-11 User's Guide 7-1
    record access — RMS-11 User's Guide 7-1
  to relative files — RMS-11 User's Guide 4-6
    block access — RMS-11 User's Guide 4-6
    record access — RMS-11 User's Guide 4-6
  to sequential files — RMS-11 User's Guide 3-5
    record structured — RMS-11 User's Guide 3-6
    with undefined records — RMS-11 User's Guide 3-6
Shared device — Command Language 5-13
Shared file access
  OPEN$R — I/O Operations 1-9
  OPNS$A — I/O Operations 1-9
  OPNS$R — I/O Operations 1-9
  OPNS$U — I/O Operations 1-9
  OPNS$W — I/O Operations 1-9
  Permitted second access — I/O Operations 1-9
Shared region — Task Builder 5-1
  See Region
Sharing
  See Shared access
Sharing code or data — PDP-11 MACRO-11 6-45
Sharing declaration — RMS-11 User's Guide 2-7
  indexed files — RMS-11 User's Guide 7-1
  no sharing — RMS-11 User's Guide 2-7
  read-only — RMS-11 User's Guide 2-7
  read/write — RMS-11 User's Guide 2-7
  relative files — RMS-11 User's Guide 4-6
  sequential files — RMS-11 User's Guide 3-6
  user-provided interlocks — RMS-11 User's Guide 2-7
SHF
  algorithms
    first pass — System Management 14-5
    second pass — System Management 14-6
  conventions — System Management 14-1
  installation of — System Management 14-4
  monitoring with RMD — System Management 14-4
  overhead — System Management 14-4
  performance — System Management 14-4
  removal of — System Management 14-5
  shuffling
    dynamic common regions — System Management 14-5
    fixed tasks — System Management 14-5
    partition sections — System Management 14-5

SHF
  shuffling (Cont.)
    static common regions — System Management 14-5
  size — System Management 14-4
$SHFCT
  changing contents — System Management 14-4
$SHFTM — System Management 14-4
SHIFT key — Introduction 1-9
  Command Language 3-14
SHL command — EDT Editor 8-18
Short forms
  DCL — Command Language 1-7 to 1-8, 9-1
Shortening
  command — Introduction 1-12, 2-4
SHOW ALL command
  RMSDES utility
    defining areas by default — RMS-11 Utilities 2-17
    defining areas explicitly — RMS-11 Utilities 2-43
SHOW ASSIGNMENTS command — Command Language 2-4, 5-72 to 5-73, 9-36
SHOW CLOCK_QUEUE command — Command Language 7-60, 9-37
SHOW command — Introduction 1-11
  description — EDT Editor 1-9, 9-15
  function of — EDT Editor 9-1
  list of — EDT Editor 9-1 to 9-2
  RMSDES utility — RMS-11 Utilities 2-15, 2-18, 2-26
    allocation — RMS-11 Utilities 2-10
    PROTECTION attribute — RMS-11 Utilities 2-33
    SHOW ALL — RMS-11 Utilities 2-4
      setting attributes — RMS-11 Utilities 2-21
    with GET — RMS-11 Utilities 2-25
  SHOW BUFFER — EDT Editor 2-34, 6-5, 7-2, 9-15
  SHOW CASE — EDT Editor 9-15
  SHOW CURSOR — EDT Editor 9-16
  SHOW ENTITY — EDT Editor 9-16
  SHOW KEY — EDT Editor 9-16
  SHOW SCREEN — EDT Editor 9-17
  SHOW SEARCH — EDT Editor 9-17
  SHOW TERMINAL — EDT Editor 9-17
  SHOW VERSION — EDT Editor 9-17
SHOW DAYTIME command — Command Language 2-1 to 2-2, 8-2, 9-37
SHOW DEFAULT command — Introduction 1-15
  Command Language 2-4, 3-2, 4-79, 9-37
SHOW DEVICES command — Introduction 3-8, 5-10
  Command Language 2-3, 5-4, 5-77 to 5-80, 9-37
Show devices switch — Crash Dump Analyzer 2-3
SHOW GROUPFLAGS command — Command Language 6-92, 9-38
SHOW ID command
  RMSDES utility — RMS-11 Utilities 2-16
/SHOW keyword
  CLI command — MCR Operations 3-39
SHOW LIBRARY command — Command Language 8-7
SHOW MEMORY command — Introduction 5-8 to 5-9
  Command Language 2-2, 8-9 to 8-13, 9-38
SHOW parameter
  SET parameter — EDT Editor 9-1
SHOW PARTITIONS command — Command Language 7-43 to 7-45, 9-38
SHOW PROCESSOR command — Command Language 2-4, 9-39
  format — Batch and Queue 2-18
/SHOW qualifier — PDP-11 MACRO-11 8-11

SHOW QUEUE command — Introduction 6-2; Batch and Queue 2-14; Command Language 2-3 to 2-4, 9-39
  batch queue — Batch and Queue 1-9
  display — Batch and Queue 2-16 to 2-17
  format — Batch and Queue 2-15
  print queue — Batch and Queue 1-9
  qualifiers — Batch and Queue 2-15
  SHOW QUEUE display — Batch and Queue 1-10
SHOW QUEUE/FULL command — Command Language 2-4
/Show switch — Error Logging 2-10 to 2-11
Show switch — Error Logging 2-4
SHOW SYSTEM command — Command Language 8-5 to 8-7, 9-40
SHOW SYSTEM/DIRECTORY command — Command Language 2-7
SHOW TASK command — Command Language 9-40
SHOW TASK/LOGICAL_UNITS command — Command Language 7-57 to 7-58
SHOW TASK:taskname/DYNAMIC
    command — Command Language 7-53 to 7-54, 9-40
SHOW TASKS — Command Language 7-45
SHOW TASKS command — Introduction 1-20, 4-13; Command Language 2-5
SHOW TASKS/ACTIVE command — Command Language 2-5, 3-2, 7-46 to 7-50, 9-40
SHOW TASKS/ACTIVE/DYNAMIC command — Command Language 7-55 to 7-57, 9-40
SHOW TASKS/INSTALLED command — Command Language 2-5, 7-51 to 7-53, 9-40
SHOW TERMINAL command — Introduction 1-18; Command Language 2-2 to 2-3, 3-43 to 3-54, 9-41 to 9-42
SHOW TIME command — Introduction 1-11; Command Language 2-1 to 2-2, 8-2, 9-37
SHOW USERS command — Introduction 1-19; Command Language 2-5, 8-7 to 8-8, 9-42
SHR command — EDT Editor 8-18
SHR field in FAB
  CREATE operation — RMS-11 Macros 5-14
  offset — RMS-11 Macros 6-22
  OPEN operation — RMS-11 Macros 5-75
  READ operation — RMS-11 Macros 5-99, 5-101
  summary — RMS-11 Macros 6-63
  WRITE operation — RMS-11 Macros 5-127, 5-129
Shuffler
  See SHF
Shuffler support — System Generation (11M) 4-34
SHUTUP
  completion notification — System Management 8-3
  deallocating
    checkpoint space — System Management 8-4
  dismounting
    devices — System Management 8-4
  halting
    processor — System Management 8-4
  invoking — System Management 8-1
  logging off
    logged-in terminals — System Management 8-4
  logins
    disabling — System Management 8-2 to 8-3
    enabling — System Management 8-3
  prerequisites — System Management 8-1
  redirecting
    console terminal — System Management 8-4
  shutdown
    RSX-11M system — System Management 8-4 to 8-6

SHUTUP (Cont.)
  SHUTUP.CMD — System Management 8-1, 8-3
    submitting to Indirect — System Management 8-3 to 8-4
  stopping
    Console Logger — System Management 8-4
    ERRLOG — System Management 8-4
    Queue Manager — System Management 8-4
  task-build file — System Management 8-3
  terminating — System Management 8-2
  warning message — System Management 8-2
SHUTUP.CMD
  example — System Management 8-4
  installing
    tasks — System Management 8-1, 8-3
  overview — System Management 8-3
  relationship to SHUTUP task — System Management 8-3
  submitting to Indirect — System Management 8-3 to 8-4
  timeout interval — System Management 8-3
SIDR — RMS-11 User's Guide 5-5, 7-9
  changeable keys — RMS-11 User's Guide 6-10
  duplicate keys — RMS-11 User's Guide 6-8 to 6-9
SIGNAL statement — Error Logging 5-40 to 5-41
SIGNAL STOP statement — Error Logging 5-41
Signalling
  deinition — Error Logging 5-40
Significant event — Introduction 5-8, Gloss-30
  Executive 2-1, 5-52
  list of — Executive 2-1, 5-222
Simulating a system failure — EDT Editor 3-2
Single ASCII character indicator — PDP-11 MACRO-11 3-3
Single buffering
  versus multiple buffering — I/O Operations 1-7
Single line range — EDT Editor 6-7 to 6-8
Single segment task — Task Builder 3-8
Single-directory device
  See FB$SDI mask in DEV field
Single-precision routine
  See Integer routine
SIP — System Generation (11S) 1-1, 2-1, 2-14
  building — System Generation (11S) 4-8
  command line — System Generation (11S) 2-15
  device
    supported — System Generation (11S) 2-15
  error message — System Generation (11S) 2-17
  initiating — System Generation (11S) 2-15
  memory
    maximum size — System Generation (11S) 2-16
      determining — System Generation (11S) 2-17
      restricted device — System Generation (11S) 2-17
    saving — System Generation (11S) 2-17
      restriction — System Generation (11S) 2-17
  operation — System Generation (11S) 2-16
  programming hint — System Generation (11S) 2-16
  size — System Generation (11S) 1-3
  terminating — System Generation (11S) 2-15
SIZ field in KEY block
  CREATE operation — RMS-11 Macros 5-18
  DISPLAY operation — RMS-11 Macros 5-31
  offset — RMS-11 Macros 6-68
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-92
SIZ0 field in KEY block
  offset — RMS-11 Macros 6-68
SIZ1 field in KEY block
  offset — RMS-11 Macros 6-68

SIZ2 field in KEY block
  offset RMS-11 Macros 6-68
SIZ3 field in KEY block
  offset RMS-11 Macros 6-68
SIZ4 field in KEY block
  offset RMS-11 Macros 6-68
SIZ5 field in KEY block
  offset RMS-11 Macros 6-68
SIZ6 field in KEY block
  offset RMS-11 Macros 6-68
SIZ7 field in KEY block
  offset RMS-11 Macros 6-68
SIZE
  RMSDES utility RMS-11 Utilities 2-36
SIZE command
  EDI editor Utilities 2-46
/SIZE keyword
  LOAD command MCR Operations 3-106
    VMR System Management 10-27
Skeleton
  source file
    MACRO-11 Program Development 2-4
Skipping
  output Introduction 1-16 to 1-17
/SL switch Error Logging 2-4, 2-7
Task Builder 10-44
  CMP utility Utilities 12-3
  RMSBCK utility RMS-11 Utilities 6-6, 6-10
  RMSCNV utility RMS-11 Utilities 4-12
  RMSRST utility RMS-11 Utilities 7-6, 7-12
Slash Command Language 3-17
  DCL qualifier EDT Editor 4-3
  double (//) Task Builder 1-6
  EDI editor Program Development 2-16
  MCR qualifier EDT Editor 4-5
  ODT Program Development 5-4
  single (/) Task Builder 1-5 to 1-6
Slash operator (/) ODT 2-7, 4-2 to 4-3
/SLAVE keyword
  SET command MCR Operations 3-197
    VMR System Management 10-59
Slave terminal Introduction 5-2, Gloss-30
Command Language 3-41
SLIPR
  See SLP utility
Slow Task Builder Command Language 6-81
  to improve overhead Task Builder F-11
SLP utility Introduction 2-3
Command Language 4-17 to 4-19, 9-15
  audit trail Utilities 13-16
    changing value Utilities 13-17
    deleting Utilities 13-19
    setting
      length Utilities 13-17
      position Utilities 13-17
    suppressing Utilities 13-18
  checksum Utilities 13-3
  edit command line Utilities 13-5
  edit commands Utilities 13-5
  error message Utilities 13-20
  file
    input Utilities 13-2
    listing Utilities 13-3
    output Utilities 13-3

SLP utility
  file (Cont.)
    processing — Utilities 13-4
    source
      creating — Utilities 13-14
      updating — Utilities 13-9
  indirect command file — Utilities 13-8
  initiating (invoking) — Utilities 13-1
  operator — Utilities 13-9
  switch — Utilities 13-14
/SLV keyword
  INSTALL command — MCR Operations 3-96
    VMR — System Management 10-24
  RUN command — MCR Operations 3-154
$$SLVC
  reserved PSECT name — Task Builder E-4
SMSG$ — Error Logging 1-4, Executive 5-162
SN command — EDT Editor 8-19
$SNAP — Program Development 1-7 to 1-8, 5-9 to 5-10
  subset of Postmortem Dump Task — Program Development 5-9 to 5-10
SNAP$ macro — Task Builder D-6
  format of — Task Builder D-8
Snapshot dump — Task Builder D-5 to D-6
  See also $SNAP
  example of — Task Builder D-10 to D-12
  format of macro for creating — Task Builder D-7
SNPBK$ macro — Task Builder D-6
  format of — Task Builder D-7
SNPDF$ macro — Task Builder D-6
Soft error
  definition — Error Logging 1-3
Soft error limit switch — Error Logging 2-4, 2-7
Software — Introduction Gloss-30
  configuration — System Generation (11S) 1-2
  minimum — System Generation (11S) 1-3
  supplied
    Basic MCR — System Generation (11S) 2-1
    display program — System Generation (11S) 2-1
    OTL — System Generation (11S) 2-1
    RSDV05 — System Generation (11S) 2-1
    RSDV1H — System Generation (11S) 2-1
    RSDV52 — System Generation (11S) 2-1
    SETTIM — System Generation (11S) 2-1
    SIP — System Generation (11S) 2-1
    TKTN — System Generation (11S) 2-1
Software Performance Monitor
  See SPM
Software Performance Report
  See SPR
Son of Stopgap
  See SOS editor
SORT command — Command Language 4-63 to 4-69, 9-42
Sort option
  ACNT — System Management 2-8
Sort routine error code
  RMSIFL utility — RMS-11 Utilities D-1
Sort work files (RMSIFL) — RMS-11 Utilities 3-1, 3-10, 3-12
  allocating space
    primary key sort — RMS-11 Utilities 3-13
  device allocation — RMS-11 Utilities 3-7
SORT-11 — Command Language 4-63 to 4-69, 9-42
Sorting (RMSIFL)
  alternate key — RMS-11 Utilities 3-11 to 3-13

Sorting (RMSIFL) (Cont.)
  alternate key files — RMS-11 Utilities 3-7
  bypassing primary key sort — RMS-11 Utilities 3-8 to 3-9
  input file organization — RMS-11 Utilities 3-9
  primary key — RMS-11 Utilities 3-9
  work files — RMS-11 Utilities 3-7, 3-13
SOS editor — Command Language 4-20 to 4-22, 9-16

SOURCE
  RMSDES utility — RMS-11 Utilities 2-30
SOURCE argument — PDP-11 MACRO-11 8-11
Source file — Introduction 2-1, 4-3, 4-5, Gloss-30

  See also Source language
  See also SLP utility
  case control in — PDP-11 MACRO-11 6-19
  FORTRAN IV
    adding debugging statements — Program Development 7-7
    blank line — Program Development 7-3
    comment line — Program Development 7-3
    creating — Program Development 7-2 to 7-3
    editing — Program Development 7-4 to 7-5, 7-7, 7-9

  MACRO-11
    assembling — Program Development 3-1 to 3-2
    creating from a skeleton — Program Development 2-12
    editing — Program Development 2-13 to 2-18
    error — Program Development 3-2 to 3-4
    format — Program Development 2-1 to 2-3
      skeleton — Program Development 2-4
    inserting lines — Program Development 2-18
    listing — Program Development 3-4 to 3-6
    macro library call — Program Development 6-3 to 6-4
    preface — Program Development 2-1
  terminating input in — PDP-11 MACRO-11 6-39
Source files
  applying corrections to — Release Notes 1-40
Source language — Introduction 4-4, Gloss-30
Command Language 6-2

  See also Source file
Source Language Input Program
  See SLP utility
Source line format — PDP-11 MACRO-11 2-5
Source module
  DCL
    updating — Release Notes 1-46
  Executive
    updating — Release Notes 1-40
  MCR
    updating — Release Notes 1-42
/-SP — Crash Dump Analyzer 2-6
SP command
  EDI editor — Utilities 2-45
/SP switch — PDP-11 MACRO-11 8-7
Task Builder 10-45

  CMP utility — Utilities 12-3
  DMP utility — Utilities 11-8
  FLX utility — Utilities 4-8
  LBR utility — Utilities 10-29
  PIP utility — Utilities 3-38
  SLP utility — Utilities 13-15
Space
  application design consideration — RMS-11 User's Guide 2-4, 8-1
  checkpoint
    allocating — MCR Operations 3-8

Space (Cont.)
  data storage — RMS-11 User's Guide 2-5
  I/O buffer size — RMS-11 User's Guide 2-5
  task size — RMS-11 User's Guide 2-5
$SPACE macro — RMS-11 Macros 5-120
  RSTS/E — RMS-11 Macros D-4
SPACE operation — RMS-11 Introduction 4-7; RMS-11 Macros 4-14
  access modes — RMS-11 Introduction 4-7
  $SPACE macro — RMS-11 Macros 5-120
Space problems
  disk space recovery — System Generation (11M) 6-3, 6-14
<SPACE> symbol — MCR Operations 4-11
Spanning blocks — RMS-11 Introduction 4-2; RMS-11 User's Guide 1-16, 1-19, 3-1
  variable-length records — RMS-11 User's Guide 2-16
Spawn directive — Executive 5-172
Spawning — Executive 4-1
  a CLI — Executive 4-5
  a utility — Executive 4-5
  system tasks — Executive 4-5
Special buffer handling — Writing I/O Driver 6-9
  example — Writing I/O Driver 6-9 to 6-11
Special character — PDP-11 MACRO-11 3-1 to 3-3
  as delimiter — EDT Editor 2-30
  assembler
    summary — PDP-11 MACRO-11 B-1
  entering — I/O Operations 7-9
  nokeypad substitution — EDT Editor 8-16
Special symbol — MCR Operations 4-8
  format — MCR Operations 4-8
  logical — MCR Operations 4-8
  numeric — MCR Operations 4-10
  string — MCR Operations 4-12
  type — MCR Operations 4-8
Specify Command Arrival AST
    directive — Executive 5-145
Specify Floating Point Processor
    Exception AST directive — Executive 5-160
Specify Power Recovery AST
    directive — Executive 5-170
Specify Receive Data AST
    directive — Executive 5-182
Specify Receive-By-Reference AST
    directive — Executive 5-191
Specify Requested Exit AST
    directive — Executive 5-184
Specify SST Vector Table For
    Debugging Aid directive — Executive 5-202
Specify SST Vector Table For Task
    directive — Executive 5-204
SPECINS function — EDT Editor 5-48
Speed
  application design
      consideration — RMS-11 User's Guide 2-3, 8-1
Speed detection
  auto-baud — I/O Drivers 2-42
/SPEED keyword
  SET command — MCR Operations 3-198
    VMR — System Management 10-59
SPM — System Generation (11M) 4-62
SPND$S — Executive 5-169
Spool
  definition — Batch and Queue Gloss-8
  spooling output — Batch and Queue 2-1

Spooled device — Batch and Queue 1-3, 2-1
  definition — Batch and Queue Gloss-8
  line printer — Batch and Queue 1-3
  output — Batch and Queue 1-3
  redirecting — Executive 5-83
Spooling — I/O Operations 8-1
  file
    PIP utility — Utilities 3-38
  library file
    LBR utility — Utilities 10-29
  transparent — System Management 7-1
SPR
  reporting problems using — Release Notes 1-38
SPRA$ — Executive 5-170
SPWN$ — Executive 5-172
SPWN$ directive
  IOX
    in EXECUTE command — System Management 4-36
SPY command
  IOX — System Management 4-58
/SQ switch — Task Builder 10-46
  SLP utility — Utilities 13-16
/SR switch
  PIP utility — Utilities 3-39
SRC symbolic argument — PDP-11 MACRO-11 6-11
SRDA$ — Executive 5-182
SREA$ — Executive 5-184
SREF$ — Executive 5-188
SREX$ — Executive 5-184
SRRA$ — Executive 5-191
SS command
  EDI editor — Utilities 2-46
/SS switch
  LBR utility — Utilities 10-29
  symbol definition file
    reducing overhead — Task Builder F-4
SSM command — Error Logging 1-3
  MCR Operations 3-212
  command line format — MCR Operations 3-212
  example — MCR Operations 3-212
SST — Crash Dump Analyzer 4-2
  Executive 2-5
  I/O Drivers 1-12
  definition — Executive 2-4
  ODT — Program Development 5-8
  relation to Postmortem Dump — Program Development 1-7
  role in task termination — Program Development 4-8 to 4-9
  service routine — Executive 2-5
  specifying vector table — Executive 5-204
  task's stack content — Executive 2-6
  trap vector table format — Executive 2-5
SST fault
  abnormal — Writing I/O Driver 3-27
  internal — Writing I/O Driver 3-26
SST stack content
  register — ODT 2-7, 5-4
SST vector
  handling — ODT 2-11
  register — ODT 2-7, 5-5
SST vector address
  declaring — Task Builder 11-27
Stack
  declaring size — Task Builder 11-32
STACK option — Task Builder 11-32
Stack pointer
  kernel — Crash Dump Analyzer 3-2
  user — Crash Dump Analyzer 3-2

Stack pointer definition — PDP-11 MACRO-11 3-10
Stack structure
  abnormal SST fault — Writing I/O Driver 3-27
  data items on stack — Writing I/O Driver 3-28
  internal SST fault — Writing I/O Driver 3-26
Stand-alone
  definition — System Generation (11M) 1-6
Stand-Alone Configuration and Disk Sizing Program (CNF)
  See also BRU64K
Standard Function System — System Generation (11M) 1-2
  See also Saved answer file
  description — System Generation (11M) 3-11
  options included — System Generation (11M) 3-13
  purpose — System Generation (11M) 3-11
  question — System Generation (11M) 4-6
  restriction — System Generation (11M) 3-12
Standard ODL file — RMS-11 User's Guide 8-3, 8-5
  and file organization — RMS-11 User's Guide 8-5
  DAP11X — RMS-11 User's Guide 8-6
  RMS11S — RMS-11 User's Guide 8-5
  RMS11X — RMS-11 User's Guide 8-5
  RMS12X — RMS-11 User's Guide 8-6
START command — Command Language 7-25, 9-43
  DCL — System Management 7-26 to 7-27
  IOX — System Management 4-59
START/PROCESSOR command — Command Language 9-43
  DCL — System Management 7-27 to 7-31
START/QUEUE command — Command Language 9-44
  DCL — System Management 7-26 to 7-27
START/QUEUE/MANAGER command — Command Language 9-44
  DCL — System Management 7-3, 7-26 to 7-27
START/UNBLOCK command — Command Language 7-25 to 7-26, 9-44
Starting
  an EDT editing session — EDT Editor 2-1, 4-1
  keypad editing — EDT Editor 2-5, 5-1
  line editing — EDT Editor 2-20, 6-1, 7-1
  nokeypad editing — EDT Editor 2-36, 8-1
Startup command
  RMS-11 — Release Notes 2-19
Startup command file
  creating — EDT Editor 4-9
  definition — EDT Editor 1-5
  EDTINI.EDT — EDT Editor 1-5, 4-9
  specify mode — EDT Editor 9-5
  use of — EDT Editor 4-1
STARTUP.CMD — System Generation (11M) 6-9, 6-19
  RMS procedures — System Generation (11M) 6-11
State table — I/O Operations 7-2, 7-8
  initializing — I/O Operations 7-2
Statement
  MACRO-11 — Program Development 1-4
    format — Program Development 2-3
Statement format — PDP-11 MACRO-11 2-1
Static common region — Executive 5-16
  checkpointing — System Management 14-3
  resident common — System Management 14-2
  resident libraries — System Management 14-2
  shuffling — System Management 14-5
Statistics
  system
    display in RMD — System Management 6-13D
Statistics block — I/O Operations 3-11
  format — I/O Operations H-1

Status
  displaying
    during IOX exercising — System Management 4-58
  emitting — Executive 5-64
Status block
  I/O — I/O Drivers 1-35
Status code
  ERROR
    definition — Batch and Queue Gloss-4
  I/O — I/O Drivers 1-33, B-1
  SEVERERROR
    definition — Batch and Queue Gloss-4
  SUCCESS
    definiton — Batch and Queue Gloss-4
  WARNING
    definition — Batch and Queue Gloss-4
Status Control Block
  See SCB
Status flag
  task — Command Language 7-48
Status return
  A/D converter — I/O Drivers 14-8 to 14-9
  card reader — I/O Drivers 11-3, 11-7
  cassette — I/O Drivers 9-3 to 9-5
  DECtape — I/O Drivers 6-4 to 6-6
  disk — I/O Drivers 5-8 to 5-11
  DT07 — I/O Drivers 23-7
  graphic display driver — I/O Drivers 20-3
  ICS/ICR — I/O Drivers 18-13 to 18-14
  laboratory peripheral system — I/O Drivers 16-29 to 16-33
  line printer — I/O Drivers 10-4 to 10-5
  magnetic tape — I/O Drivers 8-10 to 8-12
  message-oriented communication — I/O Drivers 12-8 to 12-10
  paper tape — I/O Drivers 17-3 to 17-4
  PCL receiver — I/O Drivers 13-11 to 13-12
  PCL transmitter — I/O Drivers 13-6 to 13-8
  terminal — I/O Drivers 2-23 to 2-27
  TU58 — I/O Drivers 7-4 to 7-5
  UDC — I/O Drivers 15-32 to 15-34
/STB — Crash Dump Analyzer 2-6
.STB file — Task Builder 5-9
  absolute region — Task Builder 5-7, 5-9
  content of a — Task Builder 5-5
  excluding symbol from — Task Builder 5-11
  for region — Task Builder 5-4 to 5-5, 5-14, 5-16
  including symbol in — Task Builder 5-11
  interaction of /CO/LI/PI switches — Task Builder 5-4
  overlaid region — Task Builder 5-11 to 5-12
    global symbols in — Task Builder 5-11
  program sections — Task Builder 5-16
  program sections in — Task Builder 5-5
  relocatable region — Task Builder 5-9, 5-16
  use of /CO/LI/PI switches — Task Builder 5-5, 5-9
/STD — Crash Dump Analyzer 2-2
STD — Introduction 4-9, 5-7, Gloss-17, Gloss-30; Command Language 7-1 to 7-2, 7-26 to 7-34, 7-51 to 7-53, 9-29; MCR Operations 2-22, 3-93
  entry
    deleting — MCR Operations 3-146
Step command — ODT 2-10, 3-3
STIM$ — Executive 5-195
$STKDP — Crash Dump Analyzer 4-2

$STKDP pointer
  use of
    in fault tracing — Writing I/O Driver 3-23
STLO$ — Executive 5-198
$STMAP routine — Writing I/O Driver B-2
$STMAP routine — Writing I/O Driver 5-26, B-3
  use of
    to obtain UMRs — Writing I/O Driver B-1
$STMP1 routine — Writing I/O Driver 5-27, B-2 to B-3
  use of
    to obtain UMRs — Writing I/O Driver B-1
STOP command
  DCL — System Management 7-23
.STOP directive — MCR Operations 4-51
  example — MCR Operations 4-51
  format — MCR Operations 4-51
Stop directive — Executive 5-200
Stop For Logical OR Of Event Flags directive — Executive 5-198
Stop For Single Event Flag directive — Executive 5-201
STOP statement — Executive 5-70
STOP$S — Executive 5-200
Stop-bit synchronization
  directives — Executive 2-7, 2-11
STOP/ABORT command — Executive 2-12
  DCL — Command Language 9-44
STOP/BLOCK command — System Management 7-25
STOP/PROCESSOR command — Command Language 7-23 to 7-24, 9-45
  DCL — Command Language 9-45
STOP/QUEUE command — System Management 7-24 to 7-25
  DCL — Command Language 9-45
STOP/QUEUE/MANAGER command — System Management 7-23
  DCL — Command Language 9-46
Stopped task — System Management 7-23
Stopping
  command — Command Language 7-25
Storage
  data — Introduction 1-21
Storage Map File header — RMS-11 Introduction 2-1
$STORE macro — I/O Operations E-2
  example — RMS-11 Macros 2-10
$STPCT routine — RMS-11 Macros 7-3, 7-7, 7-11, 7-15
  use of
    by ACP — Writing I/O Driver D-7
%STR — Error Logging 5-23 to 5-24
Stream — RMS-11 Macros 4-2
  See also Access stream
  access — RMS-11 Introduction 4-3
  connecting
    See CONNECT operation
  disconnecting
    See DISCONNECT operation
  internal identifier
    See ISI field in RAB
  unlocking bucket
    See FREE operation
  writing buffers
    See FLUSH operation
Stream context
  advancing to next volume
    See NXTVOL operation
  rewinding
    See REWIND operation

Stream operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
  See also Operation
  block stream — RMS-11 Macros 4-13
  record stream — RMS-11 Macros 4-8
Stream operation macro
  $CONNECT — RMS-11 Macros 5-6
  declaring — RMS-11 Macros C-3
  $DISCONNECT — RMS-11 Macros 5-27
  $FLUSH — RMS-11 Macros 5-56
  $FREE — RMS-11 Macros 5-58
  $NXTVOL — RMS-11 Macros 5-70
  $REWIND — RMS-11 Macros 5-114
  $WAIT — RMS-11 Macros 5-126
Stream record format — RMS-11 Introduction 3-4; RMS-11 User's Guide 1-11, 2-16
  See also FB$STM code in RFM field
  terminators — RMS-11 Introduction 3-4; RMS-11 User's Guide 2-16
String — Introduction 2-12 to 2-13, 4-10, Gloss-30
  constant — MCR Operations 4-16
  delimiter — EDT Editor 7-17
  replacing — EDT Editor 7-14
  search (keypad) — EDT Editor 5-21 to 5-25
  search (line editing) — EDT Editor 7-8
  search (nokeypad 'string') — EDT Editor 8-4
  substituting
    keypad editing — EDT Editor 5-46
    line editing — EDT Editor 2-30, 7-16 to 7-19
    nokeypad editing — EDT Editor 2-42, 8-16
  symbol — MCR Operations 4-7, 4-16
    defining — MCR Operations 4-50
    testing — MCR Operations 4-39
String conversion function — Error Logging 5-19
String handling function — Error Logging 5-23 to 5-24
String key — RMS-11 User's Guide 6-3
  See also XB$STG mask in DTP field
  segmented — RMS-11 User's Guide 6-7
String search buffer
  example — EDT Editor 5-23
<STRLEN> symbol — MCR Operations 4-11
Structure
  in TKB
    size of — Task Builder F-3
  indexed files
    conceptual — RMS-11 User's Guide 5-4
    physical — RMS-11 User's Guide 5-2
  relative files — RMS-11 User's Guide 4-1
    conceptual — RMS-11 User's Guide 4-1
    physical — RMS-11 User's Guide 4-1
  sequential files — RMS-11 User's Guide 3-1
    conceptual — RMS-11 User's Guide 3-2
    physical — RMS-11 User's Guide 3-1
STS field in FAB — RMS-11 Macros 2-14, 3-5
  CLOSE operation — RMS-11 Macros 5-4
  CREATE operation — RMS-11 Macros 5-21
  DISPLAY operation — RMS-11 Macros 5-32
  ENTER operation — RMS-11 Macros 5-38
  ERASE operation — RMS-11 Macros 5-43
  EXTEND operation — RMS-11 Macros 5-47
  offset — RMS-11 Macros 6-22
  OPEN operation — RMS-11 Macros 5-82
  PARSE operation — RMS-11 Macros 5-89
  REMOVE operation — RMS-11 Macros 5-105
  RENAME operation — RMS-11 Macros 5-112
  SEARCH operation — RMS-11 Macros 5-118

STS field in FAB (Cont.)
  summary — RMS-11 Macros 6-64
STS field in RAB — RMS-11 Macros 2-14, 4-2
  CONNECT operation — RMS-11 Macros 5-8
  DELETE operation — RMS-11 Macros 5-26
  DISCONNECT operation — RMS-11 Macros 5-27
  FIND operation — RMS-11 Macros 5-50, 5-53, 5-55
  FLUSH operation — RMS-11 Macros 5-56
  FREE operation — RMS-11 Macros 5-58
  GET operation — RMS-11 Macros 5-62, 5-65, 5-68
  NXTVOL operation — RMS-11 Macros 5-70
  offset — RMS-11 Macros 6-115
  PUT operation — RMS-11 Macros 5-93, 5-97
  READ operation — RMS-11 Macros 5-99, 5-101
  REWIND operation — RMS-11 Macros 5-115
  SPACE operation — RMS-11 Macros 5-120
  summary — RMS-11 Macros 6-141
  TRUNCATE operation — RMS-11 Macros 5-122
  UPDATE operation — RMS-11 Macros 5-125
  WRITE operation — RMS-11 Macros 5-128, 5-130
STSE$ — Executive 5-201
STV field in FAB — RMS-11 Macros 2-14, 3-5
  CLOSE operation — RMS-11 Macros 5-4
  CREATE operation — RMS-11 Macros 5-21
  DISPLAY operation — RMS-11 Macros 5-32
  ENTER operation — RMS-11 Macros 5-38
  ERASE operation — RMS-11 Macros 5-43
  EXTEND operation — RMS-11 Macros 5-47
  offset — RMS-11 Macros 6-22
  OPEN operation — RMS-11 Macros 5-82
  PARSE operation — RMS-11 Macros 5-89
  REMOVE operation — RMS-11 Macros 5-105
  RENAME operation — RMS-11 Macros 5-112
  SEARCH operation — RMS-11 Macros 5-118
  summary — RMS-11 Macros 6-65
STV field in RAB — RMS-11 Macros 2-14, 4-2
  CONNECT operation — RMS-11 Macros 5-8
  DELETE operation — RMS-11 Macros 5-26
  DISCONNECT operation — RMS-11 Macros 5-27
  FIND operation — RMS-11 Macros 5-50, 5-53, 5-55
  FLUSH operation — RMS-11 Macros 5-56
  FREE operation — RMS-11 Macros 5-58
  GET operation — RMS-11 Macros 5-62, 5-65, 5-68
  NXTVOL operation — RMS-11 Macros 5-70
  offset — RMS-11 Macros 6-115
  PUT operation — RMS-11 Macros 5-93, 5-97
  READ operation — RMS-11 Macros 5-99, 5-101
  REWIND operation — RMS-11 Macros 5-115
  SPACE operation — RMS-11 Macros 5-120
  summary — RMS-11 Macros 6-142
  TRUNCATE operation — RMS-11 Macros 5-122
  UPDATE operation — RMS-11 Macros 5-125
  WRITE operation — RMS-11 Macros 5-128, 5-130
/SU switch
  PIP utility — Utilities 3-12
  RMSBCK utility — RMS-11 Utilities 6-7
  RMSCNV utility — RMS-11 Utilities 4-5, 4-7, 4-13, 4-15
  RMSRST utility — RMS-11 Utilities 7-8
SU$-family symbol
  declaring — RMS-11 Macros C-3
  value — RMS-11 Macros A-1
/SUB keyword
  SET command — MCR Operations 3-199
    VMR — System Management 10-60
Subconditional assembly — PDP-11 MACRO-11 6-53 to 6-54

Subexpression
  TPARS — I/O Operations 7-7
  using — I/O Operations 7-19
Subpacket definition — Error Logging 4-69
  dispatch module — Error Logging 4-69 to 4-71
  DSP1M1 — Error Logging 4-72
  DSP1P1 — Error Logging 4-72
  DSP2M1 — Error Logging 4-73
  DSP2P1 — Error Logging 4-73
  DSP3M1 — Error Logging 4-73
  DSP3P1 — Error Logging 4-73
  DSP4M1 — Error Logging 4-74
  DSP4P1 — Error Logging 4-74
  DSP5M1 — Error Logging 4-74
  DSP5P1 — Error Logging 4-74
  DSP6M1 — Error Logging 4-74
  DSP6P1 — Error Logging 4-74
  DSP7M1 — Error Logging 4-75
  DSP7P1 — Error Logging 4-75
SUBPACKET statement — Error Logging 5-29
Subpartition — Command Language 7-38, 7-40 to 7-45, 9-32; MCR Operations 2-20
  creating — MCR Operations 3-199; System Management 10-60
  eliminating — MCR Operations 3-200; System Management 10-61
Subroutine — Introduction 4-10 to 4-11, 4-13, Gloss-31
  calling — MCR Operations 4-37
  returning from — MCR Operations 4-48
SUBS function — EDT Editor 5-44
SUBSTITUTE command — EDT Editor 2-30, 7-16
  EDT — Introduction 2-11 to 2-12
SUBSTITUTE NEXT command — EDT Editor 7-19
Substituting text
  keypad editing — EDT Editor 5-44, 5-46
  line editing — EDT Editor 2-30, 7-16, 7-19
  nokeypad editing — EDT Editor 2-42, 8-16
  redefined key — EDT Editor 10-8
Substitution — MCR Operations 4-17
  enabling — MCR Operations 4-33
  format control — MCR Operations 4-18
  mode — MCR Operations 4-33
Substring — MCR Operations 4-16
  searching for — MCR Operations 4-51
Subsystems
  IC and IS — System Generation (11M) 4-92
  IP — System Generation (11M) 4-96
Subtopic
  HELP — EDT Editor 1-4, 7-9
Subtraction operator — PDP-11 MACRO-11 3-2, 3-5
Success
  handler — RMS-11 Macros 2-17
SUM block — RMS-11 Introduction 4-8
  chaining to FAB — RMS-11 Macros 2-12
  declaring — RMS-11 Macros 2-8
  initializing — RMS-11 Macros 2-9
  summary — RMS-11 Macros 6-145
.SUML1
  reserved global symbol — Task Builder E-2
Summary listing
  RMSBCK utility — RMS-11 Utilities 6-10
  RMSCNV utility — RMS-11 Utilities 4-12
  RMSRST utility — RMS-11 Utilities 7-12
Summary report
  generated by PRINTSUMMARY — System Management 4-47

Summary report (Cont.)
  IOX System Management 4-20
Summary XAB
  See SUM block
SUMMARYTIME command
  IOX System Management 4-60
SUPERSEDE
  RMSDES utility RMS-11 Utilities 2-35
/SUPERSEDE qualifier
  BRU utility Utilities 7-21
Supersession
  See also FB$SUP mask in FOP field
  RMSBCK utility RMS-11 Utilities 6-7
  RMSCNV utility RMS-11 Utilities 4-7, 4-13
  RMSDEF utility RMS-11 Utilities A-7
  RMSRST utility RMS-11 Utilities 7-8
Supervisor libraries ODT 1-4
Supervisor mode ODT 1-4, 3-2
RMS-11 User's Guide 8-7, 8-9
  command ODT 2-11
  debugging ODT 1-4
  install
    READ/WRITE ODT 1-4
  set ODT 2-11
Support Introduction 1-2, 2-1, Gloss-31
Support routine
  I/O page
    direct access System Generation (11S) 4-13
Suspend directive Executive 5-169
SVDB$ Executive 5-202
SVTK$ Executive 5-204
/SW switch Error Logging 2-4, 2-8
Swapping Introduction 5-6 to 5-7, Gloss-31
Switch MCR Operations 2-5
  See also individual switch
      entries
  See also RMSBCK, RMSCNV,RMSDSP,
      RMSIFL, RMSRST
  analysis Crash Dump Analyzer 2-1
  argument MCR Operations 2-5
  BAD utility Utilities 6-5
  BRU utility Utilities 7-12
  CMP utility Utilities 12-2
  conflict in Task Builder 10-1
  CRF utility Utilities B-1
  cross-reference control PDP-11 MACRO-11 8-16 to 8-17
  default
    modifying Task Builder F-7 to F-11
  DMP utility Utilities 11-3
  DSC utility Utilities 8-9
  file specification PDP-11 MACRO-11 8-6 to 8-7
  FLX utility Utilities 4-3
  FMT utility Utilities 5-7
  form MCR Operations 2-5
  format PDP-11 MACRO-11 8-5 to 8-6
  function Crash Dump Analyzer 2-1
  function control PDP-11 MACRO-11 8-6 to 8-7
  Indirect MCR Operations 4-19
  LBR utility Utilities 10-9
  listing control PDP-11 MACRO-11 8-6 to 8-7
  macro library PDP-11 MACRO-11 8-6 to 8-7
  modifying default of Task Builder F-7 to F-11
  PAT utility Utilities 14-6
  PIP utility Utilities 3-14
  RMSBCK utility RMS-11 Utilities 6-4 to 6-5
  RMSCNV utility RMS-11 Utilities 4-5, 4-7
  RMSDSP utility RMS-11 Utilities 5-3 to 5-4

Switch (Cont.)
  RMSIFL utility RMS-11 Utilities 3-3, 3-5
  RMSRST utility RMS-11 Utilities 7-3, 7-5
  SLP utility Utilities 13-14
  summary Task Builder 10-2 to 10-4
    BAD Utilities A-12
    BRU Utilities A-13
    CMP Utilities A-22
    DMP Utilities A-20
    DSC Utilities A-16
    EDI Utilities A-1
    FLX Utilities A-9
    FMT Utilities A-11
    LBR Utilities A-18
    PAT Utilities A-24
    PIP Utilities A-5
    SLP Utilities A-23
    VFY Utilities A-17
    ZAP Utilities A-25
  syntax Task Builder 10-1
  Task Builder Task Builder 10-1
    /AC[:n] Task Builder 10-5
    /AL Task Builder 10-6
    /CC Task Builder 10-7
    /CM Task Builder 10-8
    /CO Task Builder 10-9
    /CP Task Builder 10-10
    /CR Task Builder 10-11 to 10-13
    /DA Task Builder 10-14
    /DL Task Builder 10-15
    /EA Task Builder 10-16
    /EL Task Builder 10-17
    /FP Task Builder 10-18
    /FU Task Builder 10-19
    /HD Task Builder 10-20
    /IP Task Builder 10-22
    /LB Task Builder 10-23 to 10-24
    /LI Task Builder 10-25
    /MA Task Builder 10-26
    /MM Task Builder 10-27
    /MP Task Builder 10-28
    /NM Task Builder 10-30
    /PI Task Builder 10-31
    /PM Task Builder 10-32
    /PR[:n] Task Builder 10-33
    /RO Task Builder 10-34
    /SE Task Builder 10-35
    /SG Task Builder 10-36
    /SH Task Builder 10-37
    /SL Task Builder 10-44
    /SP Task Builder 10-45
    /SQ Task Builder 10-46
    /SS Task Builder 10-47 to 10-49
    /TR Task Builder 10-50
    /WI Task Builder 10-51
    /XH Task Builder 10-52
    /XT[:n] Task Builder 10-53
  VFY utility Utilities 9-4
  ZAP utility Utilities 15-2
Switch definition I/O Operations 6-21 to 6-26
Switch descriptor table I/O Operations 6-22 to 6-26
  end I/O Operations 6-29
  format of entry I/O Operations 6-26
Switch register
  question System Generation (11M) 4-10
Switch switch Error Logging 2-4, 2-8

Delete subswitch — Error Logging 2-4, 2-9
New version subswitch — Error Logging 2-4, 2-9
Switch value descriptor table — I/O Operations 6-27
end — I/O Operations 6-29
entry format — I/O Operations 6-28
Switching access modes — RMS-11 Introduction 3-13
$SWSTK routine — Writing I/O Driver 5-28
$SY
predefined syntax element in MML — System Management 12-44
SY:
pseudo device — Command Language 4-2, 4-77 to 4-79, 5-6, 5-72 to 5-73, 9-31
<SYDISK> symbol — MCR Operations 4-14
SYM symbolic argument — PDP-11 MACRO-11 6-12
Symbol — Introduction Gloss-31
RMS-11 Introduction 4-7
affecting search for — Task Builder 2-7
code and mask — RMS-11 Introduction 4-7
control directive — PDP-11 MACRO-11 6-48 to 6-49
cross-reference — Program Development 3-7 to 3-8
cross-reference listing
control of — PDP-11 MACRO-11 6-22
declaration flag byte — Task Builder A-7
defining — MCR Operations 4-3, 4-7
definition file — System Management 10-2
excluding symbol from a — Task Builder 11-21
for system-owned region — Task Builder 11-11
for user-owned region — Task Builder 11-29
including symbols — Task Builder 11-18
overriding — System Management 10-4
reducing overhead — Task Builder F-4
directory record
declare global — Task Builder A-2
end of global — Task Builder A-11
internal — Task Builder A-24
displaying
example of — MCR Operations 4-56
field-offset — RMS-11 Introduction 4-7
full search in overlays
specifying — Task Builder 10-19
global — Introduction 4-6, 4-8, Gloss-15
PDP-11 MACRO-11 1-2
Program Development 1-5
address of ODT SST routine — Task Builder 11-24
ambiguously defined in overlay — Task Builder 3-16
declaring definition in a task — Task Builder 11-17
default library resolution — Task Builder 3-18
defining — MCR Operations 4-3
deleting definition of — MCR Operations 4-35
directory record — Task Builder A-2
directory record format — Task Builder A-4
end of directory record — Task Builder A-11
entry point — Program Development 1-4
excluding in a task — Task Builder 11-21
from the default library — Task Builder 3-18
in autoloadable segment — Task Builder 4-4, 4-6
in cross-reference listing — Task Builder 10-12 to 10-13
including in a task — Task Builder 11-18
multiplydefined — Task Builder 3-16
multisegment task — Task Builder 3-16
name — Task Builder A-6
name entry — Task Builder A-6
overlaid region .STB file — Task Builder 5-11

Symbol
  global (Cont.)
    overlay search sequence — Task Builder 3-17
    resolution — Program Development 1-4 to 1-5, 4-2; Task Builder 2-7, 3-17
    resolution in co-tree — Task Builder 3-17
    resolution in multisegment task — Task Builder 3-16
    undefined — Task Builder 2-7
  in cross-reference listing — Task Builder 10-12
  internal
    autoloadable library — Task Builder A-26 to A-27
    end-of-module — Task Builder A-30
    end-of-module format — Task Builder A-32
    global — Task Builder A-28
    internal symbol name — Task Builder A-30
    internal symbol name format — Task Builder A-31
    line-number — Task Builder A-29 to A-30
    literal record — Task Builder A-30
    literal record format — Task Builder A-31
    module name — Task Builder A-27 to A-28
    overall format — Task Builder A-24 to A-25
    PC correlation — Task Builder A-29 to A-30
    PSECT item — Task Builder A-29
    relocatable/relocated — Task Builder A-27
    start-of-segment — Task Builder A-25 to A-26
    task identification — Task Builder A-26
    TKB generated — Task Builder A-25
  local — Introduction 4-6 to 4-7, Gloss-19; Program Development 1-4 to 1-5, 2-7 to 2-8
    accessing — MCR Operations 4-21
    Begin-End block with — MCR Operations 4-3, 4-28
    definition — Program Development 2-7 to 2-8
    deleting definition of — MCR Operations 4-35
    reserved — MCR Operations 4-17
  logical — MCR Operations 4-7
    defining — MCR Operations 4-48
    testing — MCR Operations 4-41
  macro
    definition — Program Development 1-4, 1-10, 2-7, 6-4
  MACRO-11 evaluation — Program Development 1-4, 3-1 to 3-2
  marking undefined reference — PDP-11 MACRO-11 6-21
  name — MCR Operations 4-7
  name entry
    internal — Task Builder A-5
  number of processed for performance — Task Builder F-3
  numeric — MCR Operations 4-7, 4-14
    decrementing — MCR Operations 4-30
    defining — MCR Operations 4-49
    incrementing — MCR Operations 4-42
    radix of — MCR Operations 4-15
      redefining — MCR Operations 4-49
    substituting — MCR Operations 4-15
  reserved — PDP-11 MACRO-11 2-3, 3-1
  reserved for the Task Builder — Task Builder E-1
  resolving
    overlay region — Task Builder 5-11
  saved answer — System Generation (11M) A-1
  search
    selective — Task Builder 10-47 to 10-49
  special — MCR Operations 4-8
    format — MCR Operations 4-8

Symbol
  special (Cont.)
    logical — MCR Operations 4-8
    numeric — MCR Operations 4-10
    string — MCR Operations 4-12
    type — MCR Operations 4-8
  string — MCR Operations 4-7, 4-16
    defining — MCR Operations 4-50
  substituting — MCR Operations 4-17
  table — PDP-11 MACRO-11 1-1 to 1-2
    — MCR Operations 4-3
    deleting definition in — MCR Operations 4-35
    free space in — MCR Operations 4-11
    search order — PDP-11 MACRO-11 3-7
  testing — MCR Operations 4-38 to 4-39
  type — MCR Operations 4-7
  use — MCR Operations 4-7
  user-defined — PDP-11 MACRO-11 3-6 to 3-8
$ symbol — ODT 5-1
Symbol definition
  SYSLIB.OLB — Task Builder 2-7
Symbol definition file
  See .STB file
Symbol table — Introduction 4-6
Symbol table switch — Crash Dump Analyzer 2-8
Symbol-declaration macro — RMS-11 Macros 2-2
Symbolic offset — Crash Dump Analyzer B-1
  for system data structures — Writing I/O Driver C-1
SYMBOLS argument — PDP-11 MACRO-11 8-11
<SYMTYP> symbol — MCR Operations 4-11
SYN argument to RAB$B macro — RMS-11 Macros 2-8
  RSTS/E — RMS-11 Macros D-4
Synchronous line interface
  DMC11 — I/O Drivers 12-3
  DP11 — I/O Drivers 12-3
  DQ11 — I/O Drivers 12-3
  DU11 — I/O Drivers 12-3
  DUP11 — I/O Drivers 12-4
Synchronous operation — RMS-11 Introduction 4-4
  — RMS-11 User's Guide 8-2
  See also RB$ASY mask in ROP field
Synchronous System Trap
  See SST
Syntax — Introduction 1-14
Syntax element
  defining — I/O Operations 7-3
  predefined MML — System Management 12-39 to 12-40, 12-41 to 12-45
  types — I/O Operations 7-4 to 7-5, 7-8
Syntax error
  See Q error
Syntax rule
  summary of — Task Builder 1-10
/-SYS — Crash Dump Analyzer 2-2
SYSCM
  use of
    in fault isolation — Writing I/O Driver 3-23
SYSCM pointer
  $CRAVL — Writing I/O Driver 3-28
  $HEADR — Writing I/O Driver 3-24, 3-27
  $PKAVL — Writing I/O Driver 3-28
  $STKDP — Writing I/O Driver 3-23, 3-27
  $TKTCB — Writing I/O Driver 3-24, 3-27

<SYSDEV> symbol — MCR Operations 4-14
SYSGEN
  Autoconfigure — System Generation (11M) 3-16
  DCL — System Management 12-2
  definition — System Generation (11M) 3-1
  determining number of RK05s — Release Notes 1-22
  independent command files — System Generation (11M) 3-5
  indirect command files — System Generation (11M) 3-5
  introduction to — System Generation (11M) 1-1
  minimum requirements — System Generation (11M) 1-1, 4-2
  operating enviroments — System Generation (11M) 2-3
    on-line — System Generation (11M) 2-3
    stand-alone — System Generation (11M) 2-3
  overview — System Generation (11M) 1-2
  performing on RL01s and RL02s — Release Notes 1-22
  phase — System Generation (11M) 3-1
  Phase I — System Generation (11M) 4-1
  Phase II — System Generation (11M) 5-1
  Phase III — System Generation (11M) 7-1
  planning suggestions — System Generation (11M) 1-1
  PREPGEN — System Generation (11M) 3-11
    See also MCR inhibit
    Phase I — System Generation (11M) 4-4
    Phase II — System Generation (11M) 5-4
  question
    format — System Generation (11M) 3-5
    logical order — System Generation (11M) 3-7
  restriction
    on-line V4.1 — Release Notes 1-22
  Standard Function System — System Generation (11M) 3-11
  terminology — System Generation (11M) 1-3
  using V4.0 saved answer files — Release Notes 1-22
  V4.1 on V3.2 host system — Release Notes 1-21
SYSLIB
  including contribution in map — Task Builder 10-26
  replacing as default — Task Builder 10-23
SYSLIB.OLB — Command Language 6-40, 6-81
  Program Development 1-11
  for symbol definition — Task Builder 2-7
SYSLOGIN.CMD file — Command Language 3-4
SYSTB file
  creation of
    by SYSGEN — Writing I/O Driver 3-1
System
  baseline — System Generation (11M) 1-5
  bootable — MCR Operations 3-23
  booting — MCR Operations 3-23
    restriction — MCR Operations 3-24
    valid device — MCR Operations 3-23
    virgin — MCR Operations 3-24
  bootstrapping — System Management 10-41
  command file — MCR Operations 3-57
    requirements — MCR Operations 3-58
  DB-based
    bootstrapping — Release Notes 1-34
  device
    default — MCR Operations 2-2
    writing hardware boot block — MCR Operations 3-159
  directive — Program Development 1-9 to 1-10
  directives — System Generation (11M) 4-36
  displaying
    information — System Generation (11S) 2-22
  DM-based
    bootstrapping — Release Notes 1-34
  DR-based
    bootstrapping — Release Notes 1-34

System (Cont.)
  file naming
    convention — System Management B-4
  file types — System Management B-5 to B-6
  group — MCR Operations 2-3
  host — System Generation (11S) 1-2
    System Generation (11M) 1-6
  host and target — Task Builder C-1
  image — MCR Operations 3-157
    file
      configuring — System Management 10-1
      determining minimum size — MCR Operations 3-157
      Executive data space and — System Management 10-2
    foreign
      writing — System Management 10-4
    saved
      maximum size of — System Management 10-41
    writing — MCR Operations 3-157
      System Management 10-40
      supported device — System Management 10-40
  interactive — Introduction 1-1, 5-3, Gloss-18
  library
    contributions (in map) — Program Development 4-7
    macro (RSXMAC.SML) — Program Development 1-5, 1-9 to 1-10
      contents — Program Development 1-9
      search — Program Development 1-5, 1-10, 2-7
    object (SYSLIB.OLB) — Program Development 1-11
      contents — Program Development 1-11
      search — Program Development 1-11, 4-2
  logging in — MCR Operations 3-57
  logging out — MCR Operations 3-31
  management — System Management 1-1
  mapped — System Generation (11M) 1-5
    Executive 3-2
    Task Builder 2-14
    physical and virtual space — Task Builder 2-15
  multiuser — Introduction 5-1
  multiuser protection
    login
      disabling — MCR Operations 3-184
        System Management 10-51
      enabling — MCR Operations 3-184
        System Management 10-51
  multiuser setup — System Generation (11M) 6-8, 6-18
  object module library — Task Builder 2-2
    See also Library
    See also SYSLIB.OLB
  on-line — System Generation (11M) 1-6
  operating — Introduction 1-1, 4-1, 5-1, 5-4, Gloss-23
  real-time — Introduction 5-1, 5-6, Gloss-28
  saved
    rebooting — MCR Operations 3-159
  saving — MCR Operations 3-157
    System Management 10-40
    requirement — MCR Operations 3-158
    restriction — MCR Operations 3-157
    supported device — System Management 10-40
    valid device — MCR Operations 3-157
  shutdown task
    See SHUTUP
  stand-alone — System Generation (11M) 1-6
  statistics display
    RMD — System Management 6-12A
  target — System Generation (11M) 1-6

System
  target (Cont.)
    memory management — Task Builder 10-27
  task — Introduction 1-11, Gloss-32; Program Development 1-1
  time
    setting — System Generation (11S) 2-21
  UIC
    specifying — MCR Operations 3-200; System Management 10-61
  unmapped — System Generation (11M) 1-5; Task Builder 2-14
    correction to multiuser MCR — Release Notes 1-35
  virgin — System Generation (11M) 1-6, 6-1
System Common
  See SYSCM
System common — Crash Dump Analyzer 3-6
  active task — Crash Dump Analyzer 3-6
  alphabetized — Crash Dump Analyzer 3-9
  boot device — Crash Dump Analyzer 3-6
  labels — Crash Dump Analyzer 3-9
  network UIC — Crash Dump Analyzer 3-6
  partition address — Crash Dump Analyzer 3-6
  stack depth — Crash Dump Analyzer 3-6
  system size — Crash Dump Analyzer 3-6
  TCB address — Crash Dump Analyzer 3-6
  UIC — Crash Dump Analyzer 3-6
System common dump — Crash Dump Analyzer 3-1
  alphabetized — Crash Dump Analyzer 3-1
System data structure macro
  AST control block — Crash Dump Analyzer B-33
  clock queue control block — Crash Dump Analyzer B-4
  device control block — Crash Dump Analyzer B-6
  driver dispatch table — Crash Dump Analyzer B-6
  error message block — Crash Dump Analyzer B-7
  hardware register addresses — Crash Dump Analyzer B-22
  interrupt transfer block — Crash Dump Analyzer B-25
  logical assignment control block — Crash Dump Analyzer B-26
  magtape volume set control block — Crash Dump Analyzer B-27
  partition control block — Crash Dump Analyzer B-31
  status control block — Crash Dump Analyzer B-38
  task abort codes — Crash Dump Analyzer B-3
  task control block — Crash Dump Analyzer B-40
  task header — Crash Dump Analyzer B-20
  TKTN message codes — Crash Dump Analyzer B-3
  unit control block — Crash Dump Analyzer B-43
  volume control block — Crash Dump Analyzer B-15
System data structure macro
    definition — Writing I/O Driver C-1
  ABODF$ — Writing I/O Driver C-3
  CLKDF$ — Writing I/O Driver C-4
  DCBDF$ — Writing I/O Driver C-6
  EPKDF$ — Writing I/O Driver C-7
  F11DF$ — Writing I/O Driver C-14
  HDRDF$ — Writing I/O Driver C-19
  HWDDF$ — Writing I/O Driver C-21
  ITBDF$ — Writing I/O Driver C-24
  LCBDF$ — Writing I/O Driver C-25
  MTADF$ — Writing I/O Driver C-26
  PCBDF$ — Writing I/O Driver C-30
  PKTDF$ — Writing I/O Driver C-32
  SCBDF$ — Writing I/O Driver C-37
  TCBDF$ — Writing I/O Driver C-39
  UCBDF$ — Writing I/O Driver C-42

System date — Command Language 2-1, 8-1 to 8-2, 9-31, 9-37
System device switch — Crash Dump Analyzer 2-4
System directive
  summary — I/O Operations C-1 to C-3
System directory — Command Language 6-41, 7-7 to 7-9, 7-27, 8-5
System disk
  RMSBCK utility — RMS-11 Utilities 6-1
  RMSRST utility — RMS-11 Utilities 7-1
System failure
  restoring edits after — EDT Editor 3-2
  simulating — EDT Editor 3-2
System generation — Introduction 5-3, Gloss-32
  CDA and — Crash Dump Analyzer 1-1
  incorporating driver — Writing I/O Driver 3-1
  Phase 1 — System Generation (11S) 1-2
  Phase 2 — System Generation (11S) 1-2
System Generation and Installation Guide
  note to — Release Notes 1-48
  technical changes — Release Notes 1-6
System image
  See also SYSVMR.CMD
  booting — System Generation (11S) 2-16
    paper tape — System Generation (11S) 2-17
  bootstrapping — System Generation (11S) 4-14
  down-line loading
    using DECnet-11 — System Generation (11S) 4-14
  saving — System Generation (11S) 2-14
    paper tape — System Generation (11S) 2-17
    using VMR — System Generation (11S) 4-14
  transporting — System Generation (11S) 2-16
System Image Preservation program
  See SIP
System information dump — Crash Dump Analyzer 1-5
System information switch — Crash Dump Analyzer 2-5
System library — Introduction 4-11, Gloss-18, Gloss-32; Command Language 8-4
System Library Routines Refenence Manual
  note to — Release Notes 1-54
System Macro Library — Executive 1-5; PDP-11 MACRO-11 1-1
  See also .MCALL directive
System Management Guide
  note to
    VMR — Release Notes 1-54
  technical changes — Release Notes 1-18
System pool switch — Crash Dump Analyzer 2-5
SYSTEM SERVICE MESSAGE command — MCR Operations 3-212
  See also SSM command
System state register convention — Writing I/O Driver 5-1
System task
  Basic MCR — System Generation (11S) 1-1
  building — System Generation (11S) 4-5
  display program — System Generation (11S) 1-1
  OTL — System Generation (11S) 1-1
  RSDV05 — System Generation (11S) 1-1
  RSDV1H — System Generation (11S) 1-1
  RSDV52 — System Generation (11S) 1-1
  SIP — System Generation (11S) 1-1
  TKTN — System Generation (11S) 1-1

System Task Directory
  See STD
System task directory dump — Crash Dump Analyzer 3-44
System task directory switch — Crash Dump Analyzer 2-5
System time — Command Language 2-1, 8-1 to 8-2, 9-31, 9-37
System-controlled partition — System Management 14-1
  conventions — System Management 14-2
  definition — System Management 14-2
  extending memory for task in — Task Builder 11-15
  fragmentation
    causes of — System Management 14-3
  subpartitions of — System Management 14-2
  waiting tasks — System Management 14-2
<SYSTEM> symbol — MCR Operations 4-11
/SYSUIC keyword
  SET command — MCR Operations 3-200
    VMR — System Management 10-61
<SYSUIC> symbol — MCR Operations 4-14
SYSVMR.CMD
  creating partition structure — System Generation (11M) 5-14
  creating RMS partitions — System Generation (11M) 5-19
  description — System Generation (11M) 3-4
  edit — System Generation (11M) 5-14
  on mapped systems — System Generation (11M) 5-14
  on unmapped systems — System Generation (11M) 5-17
  restriction — System Generation (11M) 3-4
<SYUNIT> symbol — MCR Operations 4-11
/SZ switch
  LBR utility — Utilities 10-30

T

T error — PDP-11 MACRO-11 3-15, 5-10, 6-23
  summary — PDP-11 MACRO-11 D-4
/T switch — Error Logging 3-7, 3-9
T-bit trace trap — Task Builder 10-50
TAll — I/O Drivers 9-1
Tab
  adjusting level of — EDT Editor 5-53, 8-23
  CONTROL key — EDT Editor 5-53
  hardware horizontal
    specifying — MCR Operations 3-181
      System Management 10-50
  key — MCR Operations 2-16
  keypad editing — EDT Editor 5-53
  setting parameters of — EDT Editor 9-8
  setting position of — EDT Editor 8-21, 8-24
  tab adjust — EDT Editor 8-22
  TAB command — EDT Editor 8-21
  tab compute — EDT Editor 8-23
  Tab decrement — EDT Editor 8-24
  Tab increment (TI) — EDT Editor 8-24
  Vertical — Command Language 3-22
TAB key — Command Language 3-22
TAB ON/OFF command
  EDI editor — Utilities 2-46
Table
  definition — Error Logging 5-36
  revector control in RCT
    status codes — System Management 5-2
  RPT use — Error Logging 5-36
  symbol — Introduction 4-6
Table Driven Parser
  See TPARS — I/O Operations 7-1
Table of contents
  sample listing — PDP-11 MACRO-11 6-16

Table of contents (Cont.)
  text generation — PDP-11 MACRO-11 6-15
TABLE statement — Error Logging 5-37
Table storage — Task Builder F-2
  memory for
    to improve performance — Task Builder F-2
TADJ command — EDT Editor 8-22
/TAL — Crash Dump Analyzer 2-2
TAL command — MCR Operations 3-214
  Basic MCR — System Generation (11S) 2-4
  command line format — MCR Operations 3-214
  example — MCR Operations 3-214
Tape
  See also Medium
  backing up
    BRU utility — Utilities 7-1
  backup
    restriction with BRU — Release Notes 1-35
  comparing
    DSC utility — Utilities 8-14
  conventional backup
    BRU utility — Utilities 7-4
  copying
    BRU utility — Utilities 7-1
  data transfer
    DSC utility — Utilities 8-26
  formatting
    FLX utility — Utilities 4-4
  full backup
    BRU utility — Utilities 7-3
  mounting
    BRU utility — Utilities 7-2
  restoring
    BRU utility — Utilities 7-1
  selective backup
    BRU utility — Utilities 7-3
  setting block size
    PIP utility — Utilities 3-15
  verifying
    VFY utility — Utilities 9-1
Tape mark — I/O Operations G-16; RMS-11 Introduction 2-5
Tape set
  mounting — Command Language 5-38 to 5-40
Tape versus disk — Introduction 5-12
/TAPE_LABEL qualifier
  BRU utility — Utilities 7-21
TARGET
  RMSDES utility — RMS-11 Utilities 2-30
Target system — Task Builder C-1
  creating a backup copy — System Generation (11M) 6-9, 6-19
  definition — System Generation (11M) 1-6
  installing layered products in — System Generation (11M) 6-12, 6-19
  saving — System Generation (11M) 6-2
    nonstanard unmapped — System Generation (11M) 6-13
  test with UETP — System Generation (11M) 6-5, 6-15
  transfering task to a — Task Builder C-1
  transferring to different type of disk — System Generation (11M) 6-6, 6-15
/TAS — Crash Dump Analyzer 2-2
TAS command — MCR Operations 3-215
  command line format — MCR Operations 3-215
  error message — MCR Operations 3-216
  example — MCR Operations 3-215
  keyword
    /DEV — MCR Operations 3-215

TAS command (Cont.)
  VMR — System Management 10-70
    command line format — System Management 10-70
    example — System Management 10-70
/TASK — Crash Dump Analyzer 2-2
Task — Introduction 4-1, 4-3, 4-6 to 4-7, 4-11, 5-10, Gloss-32; Command Language 7-1; MCR Operations 2-19
  abort — Program Development 4-8
  aborting — Introduction 4-15; MCR Operations 3-3
    message — System Generation (11S) 2-18
    using PMT — System Management 13-7 to 13-9, 13-11 to 13-12
  access
    system-owned common or library — Task Builder 11-11
    user-owned common — Task Builder 11-28
    user-owned library — Task Builder 11-28
  active — Introduction 1-20 to 1-21, 4-13, 5-7, Gloss-2, Gloss-33; Command Language 7-1, 7-55 to 7-57; MCR Operations 2-23
    aborting — MCR Operations 3-31
    display
      altering from MCR — System Management 6-9
    displaying — MCR Operations 3-11
    information
      displaying — MCR Operations 3-19
    testing — MCR Operations 4-39
  active files
    declaring number of — Task Builder 11-6
  additional memory for — Task Builder 11-15
  address
    accessing — MCR Operations 3-135
    contents
      changing — MCR Operations 3-135
      displaying — MCR Operations 3-135
    relative
      accessing — MCR Operations 3-137
  address windows
    declaring an additional — Task Builder 11-39
  ancillary control processor
    specifying as — Task Builder 10-5
  application — Introduction 5-2, Gloss-3
  assembling — System Generation (11S) 1-2
  assigning physical device to LUN — Task Builder 11-7
  attached — MCR Operations 2-14, 2-18
  attaching slave attribute to — Task Builder 10-44
  blocked — Introduction 5-7, Gloss-5, Gloss-33; Command Language 7-23 to 7-26, 9-44
  blocking — MCR Operations 3-22
  breakpoints
    setting — Program Development 5-6
  building — System Generation (11S) 2-9; Program Development 4-1, 7-6
    description — System Generation (11M) 6-5
    nonprivileged — System Generation (11M) 7-2
  building for target system — Task Builder C-1
  canceling — MCR Operations 3-33; System Management 10-11
  catchall — MCR Operations 3-149

Task (Cont.)
  changing name of — Task Builder 11-34
  checkpointable — System Generation (11S) 2-9
    specifying — Task Builder 10-10
  checkpointing — MCR Operations 2-20
  CLI
    installing — MCR Operations 3-95
      System Management 10-22
    removing — System Management 10-35
  clock queue
    displaying — MCR Operations 3-42
  command line
    passing — MCR Operations 3-152
  command line to build a — Task Builder 1-2
  compiling — System Generation (11S) 1-2
  conventional
    autoload vector — Task Builder B-17
  correcting — Program Development 4-9
  creating — MCR Operations 2-21
  creating a dynamic region — Task Builder 5-40
  data
    in task image — Task Builder B-4 to B-6
    needed by system to install — Task Builder B-1
  debugging — Program Development 4-9, 7-7 to 7-9
  declaring
    execution priority for — Task Builder 11-27
    maximum stack size of — Task Builder 11-32
    number of LUNs for — Task Builder 11-37
    object-level patch for — Task Builder 11-5
    ODT SST vector in — Task Builder 11-24
  default conditions — Program Development 4-4 to 4-5, 4-7 to 4-8
  detaching — MCR Operations 2-18
  disk image — Task Builder 2-8
  disk-overlaid — System Generation (11S) 2-9
  display — System Management 6-8
  displaying
    information — System Generation (11S) 2-22
  dormant — Introduction 5-7, Gloss-11, Gloss-33
    Command Language 7-1
    MCR Operations 2-23
    testing — MCR Operations 4-39
  dumping — MCR Operations 3-96
    System Management 10-23
  enabling
    postmortem dump for — Task Builder 10-32
    T-bit trace trapping in — Task Builder 10-50
  executable — RMS-11 User's Guide 8-1
  execution termination — System Management 4-23
  exiting — MCR Operations 2-18
  extend — Executive 5-73
  extending — MCR Operations 3-95, 3-152
    System Management 10-22
    a program section in a — Task Builder 11-14
    maximum size
      specifying — MCR Operations 3-187
        System Management 10-53
    memory of — Task Builder 11-15
    to partition length — Task Builder 11-15
  external header
    specifying — Task Builder 10-52
  fixing — System Generation (11S) 2-9, 4-10
    MCR Operations 3-53
    System Management 10-18

Task
  fixing (Cont.)
    restriction — MCR Operations 3-53; System Management 10-18
  floating point processor in
    specifying — Task Builder 10-18
  format buffer
    declaring length of — Task Builder 11-16
  global relative patch
    declaring — Task Builder 11-19
  global symbol
    excluding a — Task Builder 11-21
    including in — Task Builder 11-18
  global symbol definition
    declaring a — Task Builder 11-17
  global symbol reference
    declaring a — Task Builder 11-20
  header — Task Builder 2-8
    allocating additional (checkpoint) space in — Task Builder 10-6
    checkpoint area within — Task Builder B-9
    controlling creation of — Task Builder 10-20
    fixed part — Task Builder B-11 to B-12
    space for EAE context — Task Builder 10-16
    space for floating-point context — Task Builder 10-18
  header display
    RMD — System Management 6-10
      altering from MCR — System Management 6-11
  host to target system
    example of transferring — Task Builder C-2
  I- and D-space
    autoload vector — Task Builder B-17 to B-18
    manual load calling sequence — Task Builder 4-8 to 4-9, 4-11
    overlay region vector — Task Builder 5-11
    patching — Task Builder 11-13
  identifying partition for — Task Builder 11-25
  image — Task Builder B-1, B-14
    file structure — Task Builder B-1
  image on disk
    non-overlaid — Task Builder B-2
    non-overlaid as linked to library — Task Builder B-2
    overlaid — Task Builder B-3
    overlaid I- and D-space — Task Builder B-4
  including debugging aid (ODT) in — Task Builder 10-14
  inhibiting queuing message to — Task Builder 10-35
  initiation
    IOX
      EXECUTE command — System Management 4-36
  install-run-remove
    naming convention — MCR Operations 2-23
    running — MCR Operations 3-151
  installation — Introduction 4-9 to 4-10, 5-5, Gloss-17
  installed — Command Language 7-57 to 7-58; MCR Operations 2-22
    blocking — MCR Operations 3-22
    information
      displaying — MCR Operations 3-214 to 3-215; System Management 10-70
    testing — MCR Operations 4-40
  installed name
    declaring — Task Builder 11-34

Task (Cont.)
  installing — System Generation (11S) 2-6, 2-9, 4-10; MCR Operations 2-22, 3-93; System Management 10-20
    checkpointable — MCR Operations 3-94; System Management 10-21
    using DECnet-11 — System Generation (11S) 4-14
    using VMR — System Generation (11S) 4-14
  label block — Task Builder 2-8
  label block 0 — Task Builder B-7
  label block 1 — Task Builder B-9
  label block 2 — Task Builder B-9
  label block 3 — Task Builder B-9
  linking
    to region — Task Builder 5-13
    to several libraries — Task Builder 11-8 to 11-9
  list of attributes — Task Builder 10-37
  loader
    loadable — System Generation (11M) 4-23
    nonresident — System Generation (11M) 4-23
  logical units
    number of — Task Builder 11-37
  LUNs
    reassigning — MCR Operations 3-143; System Management 10-32
  macro calls — Program Development 6-3 to 6-4
  making checkpointable — Task Builder 10-6
  map — Program Development 4-5
    full — Program Development 4-7
    linked to a common — Task Builder 5-24
    standard — Program Development 4-5 to 4-6
  mapping — Task Builder 2-15, 2-20
  maximum record buffer size
    declaring — Task Builder 11-23
  memory — Task Builder 2-10
  memory-resident — Introduction 5-7, 5-9, Gloss-2
  memory-resident overlaid — System Generation (11S) 2-9
  memory-resident overlay
    operator
    enabling — Task Builder 10-34
  memory-resident overlay segment
    changing alignment of — Task Builder 10-8
  multisegment — Task Builder 3-5
    global symbol resolution — Task Builder 3-17
  multiuser — Command Language 6-73
  name — Introduction 1-20; Command Language 7-2 to 7-3, 7-5
    CLI — System Management 11-4
    RSX-11M — Command Language 7-4
  naming — MCR Operations 3-97, 3-154; System Management 10-25
    convention — MCR Operations 2-21
  nonprivileged
    subject to pool use controls — System Management 13-5, 13-13
  object library routines — Program Development 6-6
  ODT vector — Task Builder 11-24
  overlaid — Task Builder 3-7, 3-9
    global cross-reference of — Task Builder 4-12 to 4-14
    memory savings — Task Builder 3-9 to 3-10
    segment calls — Task Builder 3-10
    virtual address space — Task Builder 3-10
  overlay — Task Builder 2-10
  overmapping I/O page — MCR Operations 3-95, 3-153; System Management 10-22
  parallel execution of
    initiating — MCR Operations 4-55

Task (Cont.)
  partition
    declaring — Task Builder 11-25
  patching of
    with object code — Task Builder 11-5
  priority — MCR Operations 2-20
    base — System Management 13-5, 13-13
    changing — MCR Operations 3-15
      System Management 10-8
    specifying — MCR Operations 3-96, 3-154
      System Management 10-23
  privileged — Introduction 5-5, Gloss-25
    Task Builder 2-25
    See also Privileged task
    change to code and data
      structure — Release Notes 1-32
    changes to Executive code — Release Notes 1-32
    changes to Executive data
      structures — Release Notes 1-32
    changes to I/O data
      structures — Release Notes 1-33
    debugging — ODT 1-4
    specifying — Task Builder 2-25
    specifying a — Task Builder 10-33
  privileged access right for
    establishing — Task Builder 10-33
  program section order
    effect in creating — Task Builder 10-36, 10-46
  prompt — MCR Operations 2-14
  ready-to-run — Introduction Gloss-33
    Command Language 7-1
  rebuilding user-written — System Generation (11M) 6-7, 6-17
  region — Task Builder 2-18 to 2-20
  relocation of — Task Builder 2-2
  removal — Introduction 4-9 to 4-10,
      Gloss-28
  removing — MCR Operations 3-146
    System Management 10-34
  requesting — MCR Operations 2-21
  rescheduling — MCR Operations 3-150
    System Management 10-36
  resident common
    system-owned — Task Builder 11-11
  resident library
    system-owned — Task Builder 11-11
  running — Introduction 4-2, 4-9 to 4-10
    Program Development 4-7 to 4-8,
      7-6
    MCR Operations 2-23, 3-148
    System Management 10-36
    checkpointable — MCR Operations 3-152
  scheduling — Command Language 7-12 to 7-15,
      7-60, 9-30, 9-37
  shareable — Command Language 6-73
  single segment — Task Builder 3-4, 3-8
  size — RMS-11 User's Guide 2-5
  slave
    specifying a — Task Builder 10-44
  slaved
    specifying — MCR Operations 3-96, 3-154
      System Management 10-24
  specifications
    multiple — Task Builder 1-5
  specifying
    KE11-A in — Task Builder 10-16
  SST — Program Development 4-8
  SST vector address

Task
  SST vector address (Cont.)
    declaring — Task Builder 11-35
  stack size
    declaring — Task Builder 11-32
  state — Command Language 7-1
  status flag
    displaying — MCR Operations 3-19
    list — MCR Operations 3-20
  stopped — Command Language 7-25, 9-43
  structure — Task Builder 2-8; RMS-11 User's Guide 1-13
    label block — Task Builder 2-8
  suspended
    continuing — MCR Operations 3-147
  swapping — MCR Operations 2-20
  system — Introduction 1-11, Gloss-32; Program Development 1-1
    Basic MCR — System Generation (11S) 1-1
    building — System Generation (11S) 4-5
    display program — System Generation (11S) 1-1
    OTL — System Generation (11S) 1-1
    RSDV05 — System Generation (11S) 1-1
    RSDV1H — System Generation (11S) 1-1
    RSDV52 — System Generation (11S) 1-1
    SIP — System Generation (11S) 1-1
    TKTN — System Generation (11S) 1-1
  system library contributions — Program Development 4-7
  system mapping status of
    indicating — Task Builder 10-26
  terminating
    message — System Generation (11S) 2-18
  termination — Program Development 4-8
    See also TKTN
  time-based schedule request
    declaring UIC for — Task Builder 11-36
  traceable
    specifying a — Task Builder 10-50
  transfer (starting) address
    default — Program Development 4-3, 4-8
    defining — Program Development 2-7
  transferring
    OTL — System Generation (11S) 2-7
  transporting — System Generation (11S) 1-2, 2-6
  UIC
    declaring — Task Builder 11-36
    specifying — MCR Operations 3-155; System Management 10-25, 10-37
  unattached — MCR Operations 2-14
  unblocking — MCR Operations 3-221
  unfixing — MCR Operations 3-222; System Management 10-74
  unstopping — MCR Operations 3-225
  use of memory management — Task Builder 2-15 to 2-16
  user
    problems with device drivers — Release Notes 1-31
  user-written
    including — System Generation (11S) 4-10
  vector address
    declaring system SST trap — Task Builder 11-35
  virtual program section
    specifying — Task Builder 11-38
  window — Task Builder 2-20 to 2-22
    linking to region — Task Builder 5-15
  writing — System Generation (11S) 1-2

Task builder
  Command Language 9-23 to 9-24
  Introduction 4-7, 4-9, 4-11, Gloss-3, Gloss-32
  I/O Operations 2-41
  RMS-11 User's Guide 1-13
  See also Linker
  See also TKB
  and optimizations — RMS-11 User's Guide 8-10
  and overlay structure — RMS-11 User's Guide 8-10
  and remote access code — RMS-11 User's Guide B-1
  and RMS-11 routines — RMS-11 User's Guide 8-1
  and RMSRES — RMS-11 User's Guide 8-6
  ASG directive — I/O Operations 6-13
  command line — Task Builder 1-2
  fast
    See Fast Task Builder
  function — Task Builder 2-1
  option — Task Builder 1-4
  PAT utility — Utilities 14-4
  switch — Task Builder 10-1
Task Builder Manual
  note to — Release Notes 1-57
  technical changes — Release Notes 1-16
TASK command
  RMD — System Management 6-9, 6-11
Task Control Block
  See TCB
Task Control Block switch — Crash Dump Analyzer 2-3
Task data space dump — Crash Dump Analyzer 3-54
Task data space switch — Crash Dump Analyzer 2-5
Task dump — Crash Dump Analyzer 3-48
  window blocks — Crash Dump Analyzer 3-48
Task execution
  abort — ODT 1-5
  begin — ODT 2-9, 3-2
  continuing — ODT 2-10, 3-2
  resuming — ODT 1-5 to 1-6, 3-2
  RSX-11M-PLUS feature — ODT 2-9
Task Exit directive — Executive 5-69
Task header
  mapped system — Writing I/O Driver 3-25
  role of
    in I/O data structure — Writing I/O Driver 2-19
  unmapped system — Writing I/O Driver 3-24
Task header dump — Crash Dump Analyzer 3-28
  directive status word — Crash Dump Analyzer 3-28
  file control block — Crash Dump Analyzer 3-29
  logical unit table — Crash Dump Analyzer 3-28
  page descriptor register — Crash Dump Analyzer 3-29
  swapping priority — Crash Dump Analyzer 3-28
  window blocks — Crash Dump Analyzer 3-29
Task header switch — Crash Dump Analyzer 2-4
Task image
  Introduction 4-3
  Program Development 1-6, 4-1, 7-6
  creating — Program Development 4-1 to 4-2, 7-5 to 7-6
  file — Introduction 2-1, 4-3, 4-8, 4-14, Gloss-33
Task image file
  patching
    ZAP utility — Utilities 15-1
Task instruction space dump — Crash Dump Analyzer 3-54
Task instruction space switch — Crash Dump Analyzer 2-6
/TASK keyword
  INSTALL command — MCR Operations 3-97
    VMR — System Management 10-25
  OPEN command — MCR Operations 3-137

/TASK keyword (Cont.)
  RUN command MCR Operations 3-154
Task Level Executive 5-18
Task name ODT 5-1
  Introduction 4-13 to 4-15
TASK option Task Builder 11-34
Task parameter buffer format Executive 5-97
Task state Introduction Gloss-33
  Executive 1-9
  active Executive 1-10
  active blocked Executive 1-10
  active ready-to-run Executive 1-10
  active stopped Executive 1-10
  transition Executive 1-10
Task state transition
  active to dormant Executive 1-11
  blocked to ready-to-run Executive 1-11
  blocked to stopped Executive 1-11
  dormant to active Executive 1-10
  ready-to-run to blocked Executive 1-10
  ready-to-run to stopped Executive 1-11
  stopped to blocked Executive 1-12
  stopped to reacy-to-run Executive 1-11
Task status flag Command Language 7-48
/TASK subkeyword
  CLI command MCR Operations 3-39
Task termination notification Executive 5-8
  See also TKTN
Task virtual address space switch Crash Dump Analyzer 2-5
Task-build Command Language 6-1, 6-62 to
    6-86, 6-88 to 6-89
Task-build command file
  RMD
    modifying System Management 6-12C
Task-build file
  location of IOX System Management 4-22
Task/File Patch Program
  See ZAP utility
TASKLIST command MCR Operations 3-215
  VMR System Management 10-70
TASKLIST-ATL command MCR Operations 3-214
/TB switch
  CMP utility Utilities 12-3
  PIP utility Utilities 3-26
TC command EDT Editor 8-23
TC11-G I/O Drivers 6-1
/TCB Crash Dump Analyzer 2-2
TCB Introduction 4-9, Gloss-17,
    Gloss-33
  MCR Operations 3-93
  pointer to Crash Dump Analyzer 3-20
TCBDF$ Crash Dump Analyzer B-40
TD command EDT Editor 8-24
/TD switch
  PIP utility Utilities 3-40
/TDS Crash Dump Analyzer 2-2
TDX Release Notes 1-24
TE trap ODT 1-5 to 1-6
TECO editor Command Language 4-21 to 4-22,
    9-16
Teleprinter listing format PDP-11 MACRO-11 6-7 to 6-8
  See also Listing control
Teletype I/O Drivers 2-3, 3-2

Temporary file
  See also FB$TMP mask in FOP field
  creating — I/O Operations 3-11
  deleting — I/O Operations 4-23
  marking
    for deletion — I/O Operations 3-12
  opening — I/O Operations 3-11
Temporary Radix-50 operator — PDP-11 MACRO-11 6-30
TEMPORARYFILE command
  IOX — System Management 4-61
$TERM
  predefined syntax element in
      MML — System Management 12-44
Term
  definition of — PDP-11 MACRO-11 3-15 to 3-16
/TERM keyword
  ACTIVE command — MCR Operations 3-11
  ALLOCATE command — MCR Operations 3-12
  ASSIGN command — MCR Operations 3-17
  SET command — MCR Operations 3-201
    VMR — System Management 10-62
Terminal — Introduction 1-1, 1-6, 1-9, 1-18 to 1-19, 4-1, 4-13, 5-2, 5-10, Gloss-33; MCR Operations 2-13; RMS-11 Macros 3-1, 5-20, 5-37, 5-42, 5-77, 5-88, 5-104, 5-111, 5-117
  See also VT52 or VT100
  attached — Command Language 3-2; MCR Operations 2-18
  attaching — I/O Drivers 2-12 to 2-13
  attributes — Command Language 2-2 to 2-3, 3-2, 3-33 to 3-54, 9-35
  baud rate
    specifying — MCR Operations 3-198; System Management 10-59
  characteristics — Command Language 2-2 to 2-3, 3-2, 3-33 to 3-54, 9-35
  CLI
    default
      specifying — MCR Operations 3-174
    resetting — MCR Operations 3-31
  control character — I/O Drivers 2-27 to 2-29
  controlling operation — MCR Operations 2-14
  CRT
    specifying — MCR Operations 3-174; System Management 10-48
  current line
    deleting — MCR Operations 2-17
    retyping — MCR Operations 2-17
  DCL
    specifying — MCR Operations 3-175
  dedicated — MCR Operations 2-19
  desk-top — I/O Drivers 2-3
  device-specific QIO — I/O Drivers 2-8, 3-5 to 3-6, 3-8
  escape sequence — I/O Drivers 2-29
  escape sequence recognition — I/O Drivers 2-13
  examining a listing — Program Development 3-6 to 3-7
  full-duplex — I/O Drivers 2-14
  full-duplex operation — I/O Drivers 2-38
  graphics — I/O Drivers 2-5
  half-duplex — I/O Drivers 3-1
  hard-copy — Introduction 1-1, 1-9, 5-9, Gloss-16
  hardcopy — EDT Editor 9-12
  input

Terminal
  input (Cont.)
    prompt — MCR Operations 2-13
    solicited — MCR Operations 2-14
    terminating — MCR Operations 2-15
    unsolicited — MCR Operations 2-14
  interface — I/O Drivers 2-39
  local
    specifying — MCR Operations 3-194; System Management 10-58
  logged-in
    displaying — MCR Operations 3-46
  MCR
    specifying — MCR Operations 3-189
  message
    sending — MCR Operations 3-27
      time limit — MCR Operations 3-27
  model — Command Language 2-2 to 2-3, 3-2, 3-33 to 3-54, 9-35
  number — Command Language 3-1
  option
    autobaud detection — MCR Operations 3-171; System Management 10-46
    backwards deletion — MCR Operations 3-174; System Management 10-48
    8-bit character — MCR Operations 3-176
    broadcast — MCR Operations 3-172; System Management 10-48
    echo — MCR Operations 3-177; System Management 10-49
    eight-bit character — System Management 10-48
    escape-sequence recognition — MCR Operations 3-178; System Management 10-49
    fill characters — MCR Operations 3-181; System Management 10-50
      vertical — MCR Operations 3-206; System Management 10-64
    full-duplex — MCR Operations 3-179; System Management 10-49
    hardware
      form feed — MCR Operations 3-180; System Management 10-50
      horizontal tab — MCR Operations 3-181; System Management 10-50
    hold-screen mode — MCR Operations 3-182
    read-pass-all — MCR Operations 3-195; System Management 10-58
    typeahead — MCR Operations 3-204; System Management 10-64
    wrap-around — MCR Operations 3-208; System Management 10-65
  output
    controlling — Program Development 3-7
    resuming — MCR Operations 2-16 to 2-17
    suppressing — MCR Operations 2-16
    suspending — MCR Operations 2-17
  paging — MCR Operations 3-184
  portable — I/O Drivers 2-3
  privilege — MCR Operations 2-6
    specifying — MCR Operations 3-191; System Management 10-57
    status — MCR Operations 2-18
  privileged — Introduction 5-5, Gloss-25
  QIO subfunction bit — I/O Drivers 2-9
  remote — MCR Operations 3-193
    baud rate

Terminal
  remote
    baud rate (Cont.)
      specifying — MCR Operations 3-193; System Management 10-57
    specifying — System Management 10-57
  rewinding file open on — I/O Operations 4-18
  slave — Introduction 5-2, Gloss-30; Command Language 3-41
  slaved — Command Language 3-2; MCR Operations 2-19
    running RMD on — System Management 6-2
    specifying — MCR Operations 3-197; System Management 10-59
  special key — I/O Drivers 2-30 to 2-31
  standard interfaces — I/O Drivers 3-2
  standard QIO function — I/O Drivers 2-7
  status return — I/O Drivers 2-23 to 2-27
  subfunction — I/O Drivers 3-7, 3-9
  subfunction summary — I/O Drivers 2-11
  teletype — I/O Drivers 2-3
  text
    deleting — MCR Operations 2-15
    displaying — MCR Operations 4-23 to 4-24, 4-26
  type — I/O Drivers 2-17
    half-duplex — MCR Operations 3-201; System Management 10-62
    specifying — MCR Operations 3-201; System Management 10-62
    standard — MCR Operations 3-201; System Management 10-62
  typeahead
    buffer
      clearing — MCR Operations 2-18
  types — Program Development 1-12
  UIC
    specifying — MCR Operations 3-205; System Management 10-64
  unattached — MCR Operations 2-18
  unit number — MCR Operations 2-21
  using SHOW TERMINAL command — EDT Editor 9-17
  video — Introduction 1-1, 1-9, 5-9
Terminal argument indicator — PDP-11 MACRO-11 3-2
Terminal characteristics — I/O Drivers 2-13 to 2-15
  setting — I/O Drivers 2-21
  side effects — I/O Drivers 2-41, 3-32
Terminal device — RMS-11 User's Guide A-1
  See also FB$TRM mask in DEV field
Terminal driver
  loadable — I/O Drivers 3-33
  options — System Generation (11M) 4-46
Terminal expression indicator — PDP-11 MACRO-11 3-2
Terminal keyboard — Command Language 3-1, 3-11
Terminal keypad — Command Language 3-1, 3-17
Terminal line truncation — I/O Drivers 3-30
Terminal register indicator — PDP-11 MACRO-11 3-2
Terminating
  RMSBCK utility — RMS-11 Utilities 6-2
  RMSCNV utility — RMS-11 Utilities 4-4
  RMSDEF utility — RMS-11 Utilities A-5
  RMSDES utility — RMS-11 Utilities 2-2, 2-9, 2-12
  RMSDSP utility — RMS-11 Utilities 5-2
  RMSIFL utility — RMS-11 Utilities 3-2
    processing — RMS-11 Utilities 3-12
  RMSRST utility — RMS-11 Utilities 7-2
Terminating directive
  See .END directive

Terminator
  stream records — RMS-11 Introduction 3-4; RMS-11 User's Guide 2-16

Test configuration
  IOX
    pattern altering — System Management 4-46
    pattern displaying — System Management 4-46
    setup — System Management 4-6
.TEST directive — MCR Operations 4-51
  example — MCR Operations 4-52
  format — MCR Operations 4-51
$TESTBITS macro — RMS-11 Macros 2-17
.TESTDEVICE directive — MCR Operations 4-52
  example — MCR Operations 4-53
  format — MCR Operations 4-52
.TESTFILE directive — MCR Operations 4-53
  example — MCR Operations 4-54
  format — MCR Operations 4-53
.TESTPARTITION directive — MCR Operations 4-54
  example — MCR Operations 4-54
  format — MCR Operations 4-54
Text
  buffer — Program Development 1-3
  deleting — MCR Operations 2-15
  displaying — MCR Operations 4-23 to 4-24, 4-26
  editor — Program Development 1-3 to 1-4
    See also EDI editor, EDT editor
  file — Introduction Gloss-33
Text buffer — EDT Editor 1-2
  automatically created — EDT Editor 6-6
  copying files from — EDT Editor 7-13, 7-22
  copying files into — EDT Editor 7-10
  creating additional — EDT Editor 6-6
  deleting contents of — EDT Editor 7-2
  for inserting text — EDT Editor 2-32, 7-11
  for moving entity — EDT Editor 8-7
  listing — EDT Editor 9-15
  MAIN — EDT Editor 1-2, 2-1, 6-5
  moving cursor throughout — EDT Editor 5-20
  PASTE — EDT Editor 1-2, 2-1, 6-5
  range specification — EDT Editor 6-11
  restriction — EDT Editor 6-6
  rules for naming — EDT Editor 6-6
  use of — EDT Editor 2-1
Text Editor and Corrector
  See TECO editor
Text entity — EDT Editor 8-2
Text information record — Task Builder A-11 to A-12
  format — Task Builder A-12
Throughput — Introduction 5-2, Gloss-34
  improving TKB — Task Builder F-1
THRU
  range specification — EDT Editor 2-30, 6-10
$TI
  predefined syntax element in MML — System Management 12-45
TI command — EDT Editor 8-24
TI:
  Pseudo device — Command Language 5-6
<TICLPP> symbol — MCR Operations 4-11
<TICWID> symbol — MCR Operations 4-12
%TIM — Error Logging 5-25
$TIM (Time conversion) — System Library 6-3
$TIME
  predefined syntax element in MML — System Management 12-42

Time
  displaying — MCR Operations 3-217; System Management 10-72
  of IOX exercise — System Management 4-55
  setting — MCR Operations 3-217; System Management 10-72
  system — Command Language 2-1, 8-1 to 8-2, 9-31, 9-37
    setting — System Generation (11S) 2-21
Time buffer format — Executive 5-95
TIME command — MCR Operations 3-217
  Basic MCR — System Generation (11S) 2-2
  command line format — MCR Operations 3-217
  example — MCR Operations 3-218
  VMR — System Management 10-72
    command line format — System Management 10-72
    example — System Management 10-72
Time conversion
  time ($TIM) — System Library 6-3
Time handling function — Error Logging 5-25
Time sharing — Introduction 5-2, Gloss-34
Time-synchronized initiation
    requests — Executive 5-51
<TIME> symbol — MCR Operations 4-14
Timeout
  count — MCR Operations 4-33
  mode — MCR Operations 4-33
<TIMOUT> symbol — MCR Operations 4-10
/TIS — Crash Dump Analyzer 2-2
<TISPED> symbol — MCR Operations 4-12
.TITLE directive — PDP-11 MACRO-11 6-15; Program Development 2-3, 2-5, 6-7
<TITYPE> symbol — MCR Operations 4-12
TKB — Command Language 6-1, 6-62 to 6-89, B-2; Program Development 1-5 to 1-6
  See also Task Builder
  /CR — Program Development 1-8, 4-6, 5-2
  /CROSS_REFERENCE — Program Development 1-8, 4-5, 5-1
  /DA — Program Development 5-2
  data structures
    modifications to — Release Notes 1-30
  /DEBUG — Program Development 5-1
  error — Program Development 4-2, 4-8 to 4-9
  /FAST — Program Development 4-4
  fast version — Program Development 4-4
  GBLPAT option — ODT 8-2
  generating
    cross-reference listing — Program Development 4-5 to 4-6
    map
      full — Program Development 4-7
      standard — Program Development 4-5 to 4-6
  /INCLUDE — Program Development 6-7 to 6-9
  input — Program Development 1-5 to 1-6
  /LB — Program Development 6-7 to 6-9, 7-8
  /LIBRARY — Program Development 6-8 to 6-9, 7-8
  LINK command
    DCL — Program Development 1-5, 4-1, 5-1, 5-9, 6-7
  linking
    ODT — ODT 1-2
    ODTID — ODT 1-3
    supervisor libraries — ODT 1-4
  /LONG — Program Development 4-7

TKB (Cont.)
  /MA Program Development 4-7
  /MAP Program Development 4-5, 4-7, 5-1, 5-9, 6-7 to 6-9
  /NOTASK Program Development 4-5
  /NOWIDE Program Development 4-5
  object library
    designation Program Development 6-4 to 6-5
    use Program Development 6-8 to 6-9
  options Command Language 6-76 to 6-79, 6-86
  output Program Development 1-6
  /PM Program Development 5-9
  /POSTMORTEM Program Development 5-9
  search of system library
    default Program Development 1-11
  /-SH Program Development 4-7
  slow
    to improve performance Task Builder F-11
  specifying
    debugger ODT 8-1
  symbol
    undefined Program Development 4-2
  /SYSTEM_LIBRARY_DISPLAY Program Development 4-7
  /TASK Program Development 5-1, 6-7 to 6-9
  TKB command
    MCR Program Development 1-5, 4-1, 5-2, 5-9, 6-7
  transfer (starting) address
    default Program Development 4-3
  UNITS option ODT 6-2
  /-WI Program Development 4-6
TKB command
  MCR Program Development 1-5, 4-1, 5-2, 5-9, 6-7

    See also TKB
TKS field in KEY block
  DISPLAY operation RMS-11 Macros 5-31
  offset RMS-11 Macros 6-68
  OPEN operation RMS-11 Macros 5-81
  summary RMS-11 Macros 6-93
$TKTCB pointer
  use of
    in fault tracing Writing I/O Driver 3-24
TKTN System Generation (11S) 1-1, 2-1, 2-18
  System Generation (11M) 4-29
  Command Language 7-19 to 7-21
  MCR Operations 3-3
  abort message Program Development 4-8
  building System Generation (11S) 4-6
  error message System Generation (11S) 2-19
  MCR Operations 3-5, A-1
  initiating System Generation (11S) 2-19
  size System Generation (11S) 1-3
  using with PMD Program Development 1-7
/TM02 switch
  DSC utility Utilities 8-22
TOC symbolic argument PDP-11 MACRO-11 6-12
TOF command
  EDI editor Utilities 2-19, 2-47
TOP command EDT Editor 8-24
  EDI editor Utilities 2-20, 2-47
TOP function EDT Editor 2-9, 5-21
/TOP keyword
  SET command MCR Operations 3-202

/TOP keyword
  SET command (Cont.)
    VMR — System Management 10-63
TOP OF FILE command
  EDI editor — Utilities 2-19, 2-47
TPARS — I/O Operations 7-1 to 7-11, 7-14
  calling conventions — I/O Operations 7-12
  options word — I/O Operations 7-12
  programming examples — I/O Operations 7-15 to 7-18
  register usage — I/O Operations 7-12
  subexpressions — I/O Operations 7-19
/TR keyword
  MOUNT command — MCR Operations 3-124
/TR switch — Task Builder 10-50
  Indirect — MCR Operations 4-19
  PIP utility — Utilities 3-40
  RMSCNV utility — RMS-11 Utilities 4-13
  RMSIFL utility — RMS-11 Utilities 3-7, 3-11
  SLP utility — Utilities 13-15
Trace mode — MCR Operations 4-33
Trace program — ODT 8-2
  listing
    format — ODT 8-2
Track — RMS-11 Introduction 2-1
  See also Placement control
TRAN$ macro — I/O Operations 7-4
Transfer
  address — Task Builder A-6
  address entry — Task Builder A-6
Transfer (starting) address
  defining — Program Development 2-7
  system treatment of default — Program Development 4-3, 4-8
Transfer address, program — PDP-11 MACRO-11 6-39
Transfer function
  processing — Writing I/O Driver 4-13
Transition
  defining — I/O Operations 7-3
  rejecting — I/O Operations 7-6, 7-18
Translation
  EBCDIC — I/O Operations G-17 to G-18
  installation-dependent routines — I/O Operations G-17
  magtape — I/O Operations G-17
Translation table
  EBCDIC — I/O Operations G-17 to G-18
Translator — Introduction Gloss-34
Translator table
  DCL — System Management 12-6 to 12-12, 12-17 to 12-20, 12-46 to 12-47
Transparent — Introduction 4-2, Gloss-34
Transparent spooling — System Management 7-1
Transportability
  22-bit systems — Release Notes 1-30
Trap — ODT 1-5 to 1-6, 2-11, 5-5, A-2
  See also SST, AST
  AST — Executive 2-4
  handling — ODT 2-11, 5-5
  SST — Executive 2-4
  system — Executive 2-4
    I/O Drivers 1-12
Tree
  applying autoload indicator — Task Builder 4-2
  calling segments in — Task Builder 4-6
  calling up-tree segments — Task Builder 4-6
  multiple
    defined — Task Builder 3-29
    defining — Task Builder 3-30

Tree
  multiple (Cont.)
    structure — Task Builder 3-18, 3-31
Tree structure
  indexed file organization — RMS-11 Introduction 3-7
.TRLUN
  reserved global symbol — Task Builder E-2
.TRNCL — I/O Operations 4-22
<TRUE> symbol — MCR Operations 4-10
$TRUNCATE macro — RMS-11 Macros 5-122
Truncate mode — MCR Operations 4-33
TRUNCATE operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15; RMS-11 Macros 4-11
  and shared access — RMS-11 User's Guide 2-6
  sequential files — RMS-11 User's Guide 3-12
  $TRUNCATE macro — RMS-11 Macros 5-122
Truncating
  command — Introduction 1-12, 2-4
Truncation
  byte storage — PDP-11 MACRO-11 6-23
  floating-point — PDP-11 MACRO-11 6-34
  line
    EDT editor — Introduction 2-16
  print line — I/O Drivers 10-7
  RMSCNV utility — RMS-11 Utilities 4-13
  RMSIFL utility — RMS-11 Utilities 3-7
  terminal line — I/O Drivers 3-30
TRUNCATION argument — PDP-11 MACRO-11 8-10
Truncation of file
  PUT$ — I/O Operations 2-9
/TSK — Crash Dump Analyzer 2-2
.TSK file type — Program Development 4-1
$$TSKP
  reserved PSECT name — Task Builder E-4
TSKV option — Task Builder 11-35
$TST
  predefined syntax element in MML — System Management 12-45
TST macro
  MML — System Management 12-39
$TSTNOT
  predefined syntax element in MML — System Management 12-45
TTDRV
  LOA special case — Writing I/O Driver 3-5
TTDRVBLD.CMD
  definition — System Generation (11M) 5-1
TTM symbolic argument — PDP-11 MACRO-11 6-12
TU58 — I/O Drivers 7-1
Two's complement operator — PDP-11 MACRO-11 3-4
Two-byte signed integer key — RMS-11 User's Guide 6-4
Two-byte unsigned binary key — RMS-11 User's Guide 6-5
TYPE
  Implied (Null)
    line editing — EDT Editor 7-12
    nokeypad editing — EDT Editor 8-13
  RMSDES utility — RMS-11 Utilities 2-38
Type
  file — RMS-11 User's Guide A-3
TYPE command — EDT Editor 2-22, 2-26, 2-30, 7-20; Introduction 1-12, 1-14, 2-15, 2-17, 3-7; Command Language 4-50 to 4-52, 9-46
  DCL — Program Development 3-6, 4-6, 7-4

TYPE command (Cont.)
  EDI editor — Program Development 2-13 to 2-14, 2-17
  EDT editor — Introduction 2-4, 2-8, 2-15
  WHOLE — EDT Editor 2-22
TYpe command
  EDI editor — Utilities 2-47
/TYPE keyword
  ALLOCATE command — MCR Operations 3-12
Type switch — Error Logging 3-7, 3-9
Type-ahead — I/O Drivers 2-37
  buffer
    clearing — MCR Operations 2-18
  option — MCR Operations 3-204; System Management 10-64
Type-code — Task Builder 2-5, 2-7
/TYPEAHEAD keyword
  SET command — MCR Operations 3-204
    VMR — System Management 10-64
Typing mistake — Introduction 1-8 to 1-9
Typographical error
  correcting with DEL C and UND C — EDT Editor 5-27

U

U command — ODT 2-11
U error — PDP-11 MACRO-11 3-8 to 3-9, 3-15, 6-20 to 6-21, 7-20
  marking undefined symbol — PDP-11 MACRO-11 6-21
  summary — PDP-11 MACRO-11 D-4
UBF field in RAB — RMS-11 Macros 4-7, 4-13
  CONNECT operation — RMS-11 Macros 5-6
  GET operation — RMS-11 Macros 5-61, 5-64, 5-67
  offset — RMS-11 Macros 6-115
  PUT operation — RMS-11 Macros 5-92, 5-96
  READ operation — RMS-11 Macros 5-98, 5-100
  summary — RMS-11 Macros 6-143
UC ON/OFF command
  EDI editor — Utilities 2-48
/UCB — Crash Dump Analyzer 2-2
UCB
  description — Writing I/O Driver 4-23
  figure — Writing I/O Driver 4-26
  negative offset — Writing I/O Driver 4-9
  relationship of
    with I/O control blocks — Writing I/O Driver 2-6
  required field — Writing I/O Driver 3-7
  role of
    in I/O data structure — Writing I/O Driver 2-20
  with ACP — Writing I/O Driver D-9
UCB field
  U.ATT — Writing I/O Driver 3-7, 4-31
  U.BUF — Writing I/O Driver 4-31
  U.CLI — Writing I/O Driver 4-25
  U.CNT — Writing I/O Driver 4-32, B-1
  U.CTL — Writing I/O Driver 2-9, 3-7, 4-10, 4-27
  U.CW1 — Writing I/O Driver 3-7, 4-29
  U.CW2 — Writing I/O Driver 3-7, 4-30
  U.CW3 — Writing I/O Driver 3-7, 4-30
  U.CW4 — Writing I/O Driver 3-7, 4-31
  U.DCB — Writing I/O Driver 3-6 to 3-8, 4-9, 4-27
  U.ERHC — Writing I/O Driver 4-25
  U.ERHL — Writing I/O Driver 4-24
  U.ERSC — Writing I/O Driver 4-24

UCB field (Cont.)
  U.ERSL — Writing I/O Driver 4-24
  U.IOC — Writing I/O Driver 4-24
  U.LUIC — Writing I/O Driver 4-25
  U.MUP — Writing I/O Driver 4-25
  U.OWN — Writing I/O Driver 4-27
  U.RED — Writing I/O Driver 3-7 to 3-8, 4-27
  U.SCB — Writing I/O Driver 3-7 to 3-8, 4-31
  U.ST2 — Writing I/O Driver 3-7, 4-29
  U.STS — Writing I/O Driver 3-7, 4-28
  U.UNIT — Writing I/O Driver 3-7, 4-29
UCBDF$ — Crash Dump Analyzer B-43
UDA50 — I/O Drivers 5-4
UDC — I/O Drivers 15-1
  device-specific QIO — I/O Drivers 15-3 to 15-9
  direct access — I/O Drivers 15-10
  FORTRAN interface — I/O Drivers 15-15
  FORTRAN subroutine summary — I/O Drivers 15-17 to 15-31
  standard QIO — I/O Drivers 15-3
  status return — I/O Drivers 15-32 to 15-34
UDC11 — I/O Drivers 15-1, 18-3
UETP
  console dialog example — System Management 9-7
  environment needed to run — System Management 9-3
  error message — System Management 9-5
    LOGGER.TSK — System Management 9-5
    system configuration module — System Management 9-5
  error messages
    NUL1.TSK — System Management 9-6
    QTRUN.TSK — System Management 9-6
  error reporting — System Management 9-4
  load test
    purpose — System Management 9-2
    requirements for RSX-11M — System Management 9-2
  modules — System Management 9-1
  operating procedures — System Management 9-4
  requirements in RSX-11M — System Management 9-3
  requirements in RSX-11M-PLUS — System Management 9-3
  running — System Management 9-4
    IOX — System Management 9-2
    utilities — System Management 9-2
  structure — System Management 9-1
  test target system — System Generation (11M) 6-5, 6-15
  testing
    interactive utilities — System Management 9-3
    MCR commands — System Management 9-3
/UF switch
  PIP utility — Utilities 3-41
UFD — Introduction 1-13 to 1-14, 3-2, 5-12, Gloss-11, Gloss-34 to Gloss-35; Command Language 4-1, 5-11, 5-65; MCR Operations 2-2
  allocating space — MCR Operations 3-219
  contents — MCR Operations 2-2
  creating — Command Language 4-11; MCR Operations 2-2, 3-219
    PIP utility — Utilities 3-41
  default — Command Language 4-3, 4-77 to 4-79, 5-72, 9-31; MCR Operations 2-2
  definition — System Management B-1
  deleting — MCR Operations 2-2
  format — MCR Operations 2-2
  listing file

UFD
  listing file (Cont.)
    PIP utility — Utilities 3-24
  name — MCR Operations 2-2
  protecting — MCR Operations 3-219
  system
    example — System Management B-3 to B-4
  validating — Utilities 9-5
UFD command — MCR Operations 3-219
  command line format — MCR Operations 3-219
  error message — MCR Operations 3-220
  example — MCR Operations 3-220
  keyword
    /ALLOC — MCR Operations 3-219
    /PRO — MCR Operations 3-219
UFD conventions in command line — Task Builder 1-9
/UFD qualifier
  BRU utility — Utilities 7-21
/UI switch
  FLX utility — Utilities 4-8
$UIC
  predefined syntax element in
      MML — System Management 12-42
UIC — Introduction 1-13 to 1-14, Gloss-35; Command Language 3-3 to 3-4, 4-2; MCR Operations 2-5
  authorized — System Management 2-1
  contained in account entry — System Management 2-1, 2-5, 2-7
  declaring in task — Task Builder 11-36
  DECnet — MCR Operations 3-189; System Management 10-53
  default — I/O Operations 4-4; MCR Operations 3-205; System Management 10-64
  displaying — System Management 2-4
  distinction by password — System Management 2-1
  option — Task Builder 11-36
  setting — System Generation (11M) 4-2
    nonprivileged — MCR Operations 2-6
    privileged — MCR Operations 2-6
  system — MCR Operations 3-200; System Management 10-61
  task — MCR Operations 3-155; System Management 10-25
  terminal — MCR Operations 3-205; System Management 10-64
UIC conversion
  ASCII to binary — I/O Operations 4-7
  binary to ASCII — I/O Operations 4-7
/UIC keyword
  HOME command — MCR Operations 3-74
  INI command — MCR Operations 3-84
  INSTALL command
    VMR — System Management 10-25
  MOUNT command — MCR Operations 3-124
  RUN command — MCR Operations 3-148, 3-155
    VMR — System Management 10-37
  SET command — MCR Operations 3-205
    VMR — System Management 10-64
<UIC> symbol — MCR Operations 4-14
[uic] switch
  QUE /LI command — Batch and Queue 2-16
$UICE
  predefined syntax element in
      MML — System Management 12-42
$ULA (Universal library) — System Library B-1

ULGF$S — Executive 5-206
UMAP$ — Executive 5-207
UMDIO$ — I/O Drivers 1-31
/UN switch
  PIP utility — Utilities 3-42
Unary operator — PDP-11 MACRO-11 3-4
  binary radix control — PDP-11 MACRO-11 3-5
  decimal radix control — PDP-11 MACRO-11 3-5
  evalutation of multiple — PDP-11 MACRO-11 3-4
  macro call use — PDP-11 MACRO-11 7-5
  octal radix control — PDP-11 MACRO-11 3-5
  one's complement — PDP-11 MACRO-11 3-5, 6-35 to 6-36
  one-word floating-point — PDP-11 MACRO-11 3-5, 6-35 to 6-36
  precedence over binary — PDP-11 MACRO-11 3-16
  radix control — PDP-11 MACRO-11 6-31 to 6-33
  Radix-50 control — PDP-11 MACRO-11 3-5, 6-30
  universal — PDP-11 MACRO-11 3-3, 3-5
UNB command — MCR Operations 3-221
UNBLOCK command — MCR Operations 3-221
  command line format — MCR Operations 3-221
  example — MCR Operations 3-221
Unbundled — Introduction Gloss-35
Unconditional assembly — PDP-11 MACRO-11 6-53
UND C function — EDT Editor 5-27
UND L function — EDT Editor 2-16 to 2-17, 5-32
UND W function — EDT Editor 5-29
UNDC command — EDT Editor 8-24
Undefined record format — RMS-11 Introduction 3-4
  RMS-11 User's Guide 1-11, 2-17
  See also FB$UDF code in RFM field
Undefined symbol — PDP-11 MACRO-11 3-8
  See also U error
Undeleting
  buffer contents after system failure — EDT Editor 3-1
  characters (keypad) — EDT Editor 5-27
  characters (nokeypad) — EDT Editor 8-24
  lines
    keypad — EDT Editor 2-16 to 2-17
  lines (keypad) — EDT Editor 5-32
  lines (nokeypad) — EDT Editor 8-25
  PASTE (keypad) — EDT Editor 5-36
  PASTE (nokeypad) — EDT Editor 8-15
  REPLACE (line editing) — EDT Editor 7-14
  words (keypad) — EDT Editor 5-29
  words (nokeypad) — EDT Editor 8-24
Underline (_)
  ODT — Program Development 5-2
Underscore (_) — Command Language 1-9, 3-16
Underscore (_) command — ODT 2-5, 4-5
UNDL command — EDT Editor 8-25
UNDW command — EDT Editor 2-41, 8-24
Unexpected traps or interrupts — Error Logging 1-6
UNF command — MCR Operations 3-222
  VMR — System Management 10-74
UNFIX command — Command Language 7-37 to 7-38, 9-47
  MCR Operations 3-222
  command line format — MCR Operations 3-222
  error message — MCR Operations 3-222
  example — MCR Operations 3-222
  VMR — System Management 10-74
    command line format — System Management 10-74
    example — System Management 10-74
UNIBUS
  power-fail recovery — I/O Drivers 23-6

UNIBUS Mapping Register
  static allocation of
    during system generation — Writing I/O Driver B-4
UNIBUS switch — I/O Drivers 23-1
Unit Control Block
  See UCB
Unit number
  parameter to NMBLK$ — I/O Operations 2-31
/UNIT switch
  DSC utility — Utilities 8-22
Unit-record device — RMS-11 Introduction 3-5; RMS-11 User's Guide 1-18, A-1; RMS-11 Macros 3-2, 5-20, 5-37, 5-43, 5-77, 5-88, 5-104, 5-111, 5-117
  RMSCNV utility — RMS-11 Utilities 4-5
UNITS option — Task Builder 11-37; ODT 6-2
Universal digital controller
  See UDC
Universal library — Command Language 6-41
  command procedures in — MCR Operations 4-19
  create — System Library B-1
Universal library file
  inserting module
    LBR utility — Utilities 10-20
  replacing module
    LBR utility — Utilities 10-27
Universal unary operator — PDP-11 MACRO-11 3-3
  See also Unary operator
    universal
UNL command — MCR Operations 3-223
  unloading driver — Writing I/O Driver 3-2
  VMR — System Management 10-75
/UNL keyword
  MOUNT command — MCR Operations 3-125
Unlabeled magtape volume — Command Language 5-4, 5-35 to 5-36
Unlabeled tape — I/O Operations G-15; I/O Drivers 8-15 to 8-16
  example — I/O Operations G-12
  file attributes — I/O Operations G-16
  positioning — I/O Operations G-11, G-16
  specifying block size — I/O Operations G-10
  specifying carriage control — I/O Operations G-11
  specifying record size — I/O Operations G-12
UNLOAD command — MCR Operations 3-223
  command line format — MCR Operations 3-223
  error message — MCR Operations 3-223
  example — MCR Operations 3-223
  VMR — System Management 10-75
    command line format — System Management 10-75
    example — System Management 10-75
UNLOCK command — Command Language 4-75 to 4-76, 9-47
Unlock Group Global Event Flags
    directive — Executive 5-206
$UNLPG (unlock page) — System Library 8-31
Unmap Address Window directive — Executive 5-207
Unmapped
  system — Task Builder 2-14
    correction to multiuser MCR — Release Notes 1-35
    memory layout — Task Builder 2-16
Unmapped system
  definition — System Generation (11M) 1-5
  question — System Generation (11M) 4-5

Unnamed program section
  See Program section
/UNOVR keyword
  CLI command — MCR Operations 3-40
Unowned device — Command Language 5-9, 5-13
UNS command — MCR Operations 3-225
UNSave command
  EDI editor — Utilities 2-48
UNSTOP command — MCR Operations 3-225
  command line format — MCR Operations 3-225
  example — MCR Operations 3-225
Unstop Task directive — Executive 5-209
UP function — EDT Editor 2-10, 5-13
/UP switch
  PIP utility — Utilities 3-42
  VFY utility — Utilities 9-8
UPD argument to ORG$ macro — RMS-11 Macros 2-3
$UPDATE macro — RMS-11 Macros 5-124
UPDATE operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15; RMS-11 Macros 4-11
  and ODLs — RMS-11 User's Guide 8-5
  and record size — RMS-11 User's Guide 2-16
  and shared access — RMS-11 User's Guide 2-6, 2-10
  and stream records — RMS-11 User's Guide 2-17
  changeable keys — RMS-11 User's Guide 6-10
  declaring with ORG$ macro — RMS-11 Macros 2-3
  deferred write — RMS-11 User's Guide 7-9
  duplicate keys — RMS-11 User's Guide 6-9
  indexed files — RMS-11 User's Guide 5-14, 7-6, 7-9
  move mode — RMS-11 User's Guide 3-14
    indexed files — RMS-11 User's Guide 7-7 to 7-8
    relative files — RMS-11 User's Guide 4-12 to 4-13
    sequential files — RMS-11 User's Guide 3-13
  relative files — RMS-11 User's Guide 4-12
  sequential files — RMS-11 User's Guide 3-12
  $UPDATE macro — RMS-11 Macros 5-124
/UPDATE switch
  BAD utility — Utilities 6-6
Updating
  DCL source module — Release Notes 1-46
  Executive source module — Release Notes 1-40
  MCR source module — Release Notes 1-42
Uppercase — Introduction 1-18
/UPPERCASE job qualifier
  SET QUEUE command — Batch and Queue 2-21
UPPERCASE ON/OFF command
  EDI editor — Utilities 2-48
/UPPERCASE qualifier
  PRINT command — Batch and Queue 2-4
User
  nonprivileged — Introduction 5-5, Gloss-25
  privileged — Introduction 5-5, Gloss-25
User account — Release Notes 1-22
User buffer — RMS-11 User's Guide 1-14
  address
    See UBF field in RAB
  size
    See USZ field in RAB
User defined switch string — Error Logging 3-21
User Environment Test Package
  See UETP
User File Directory — I/O Operations 5-2; System Management B-1
  See also UFD
USER FILE DIRECTORY command — MCR Operations 3-219

User group MCR Operations 2-3
User I/O function Error Logging 5-25
User Identification Code
  See UIC
/USER keyword
  DISMOUNT command MCR Operations 3-50
User mode ODT 1-4, 3-2
  command ODT 2-11
  set ODT 2-11
User name Command Language 3-3 to 3-4
User record buffer
  parameter for FDRC$A I/O Operations 2-9
  size I/O Operations 2-10
User volume lables
  ANSI magtape I/O Operations G-3
User-controlled partition System Management 14-1
User-defined symbol PDP-11 MACRO-11 3-6 to 3-8
  table PDP-11 MACRO-11 2-2, 3-6 to 3-8, 3-15
User-mode diagnostic function I/O Drivers 1-30
User-provided interlock RMS-11 User's Guide 3-6
  sharing declaration RMS-11 User's Guide 2-7
User-specified prompt I/O Operations 6-4, 6-10
USERCM Error Logging 3-2
.USLU1
  reserved global symbol Task Builder E-2
.USLU2
  reserved global symbol Task Builder E-2
%USR Error Logging 5-25
USRTB file
  content Writing I/O Driver 3-12
$USRTB label Writing I/O Driver 3-13
USTP$ Executive 5-209
USZ field in RAB RMS-11 Macros 4-7, 4-13
  CONNECT operation RMS-11 Macros 5-6
  GET operation RMS-11 Macros 5-61, 5-64, 5-67
  offset RMS-11 Macros 6-115
  PUT operation RMS-11 Macros 5-92, 5-96
  READ operation RMS-11 Macros 5-98, 5-100
  summary RMS-11 Macros 6-144
Utilities Command Language 1-17 to 1-19, B-1
  interactive
    testing in UETP System Management 9-3
  RSX-11M
    relationship to RCT System Management 5-5
  UETP System Management 9-2
Utilities Manual
  note to Release Notes 1-49
    DMP Release Notes 1-49
    FLX Release Notes 1-49
    PAT Release Notes 1-49
  technical changes Release Notes 1-13
Utility Introduction 4-1 to 4-2, Gloss-36
  RMS-11 Introduction 5-1
  RMS-11 User's Guide 1-12, 2-11
  See also RMSBCK, RMSCNV, RMSDEF, RMSDES, RMSDSP, RMSIFL, RMSRST
  command line format Utilities 1-4
  editing
    EDI editor Utilities 1-2
  file manipulation
    FLX utility Utilities 1-2
    PIP utility Utilities 1-2

Utility (Cont.)
  file specification
    default — Utilities 1-4
    format — Utilities 1-4
  indirect command file — Utilities 1-9
  invoking — Utilities 1-6
    DCL — Utilities 1-6
    installed — Utilities 1-7
    MCR — Utilities 1-6
    uninstalled — Utilities 1-9
  listed — Utilities 1-1
  program maintenance — Utilities 15-1
    CMP utility — Utilities 1-3
    PAT utility — Utilities 1-3
    SLP utility — Utilities 1-3
    ZAP utility — Utilities 1-4
  programming
    DMP utility — Utilities 1-3
    LBR utility — Utilities 1-3
  RMSBCK — RMS-11 Introduction 5-3; RMS-11 User's Guide 1-12
  RMSCNV — RMS-11 Introduction 5-2; RMS-11 User's Guide 1-12
    populating files — RMS-11 User's Guide 6-26 to 6-27
  RMSDES — RMS-11 Introduction 5-1; RMS-11 User's Guide 1-12, 1-18
    bucket fill size — RMS-11 User's Guide 6-29
    bucket size — RMS-11 User's Guide 4-3, 6-22
    DEQ — RMS-11 User's Guide 3-5, 4-4, 6-26
    initial allocation — RMS-11 User's Guide 3-4, 4-4, 6-26
    key segments — RMS-11 User's Guide 6-7
    MRN — RMS-11 User's Guide 4-5
    placement control — RMS-11 User's Guide 6-14
  RMSDSP — RMS-11 Introduction 5-3; RMS-11 User's Guide 1-12, 1-19
  RMSIFL — RMS-11 Introduction 5-2; RMS-11 User's Guide 1-12
    populating files — RMS-11 User's Guide 6-26 to 6-27
  RMSRST — RMS-11 Introduction 5-3; RMS-11 User's Guide 1-12
  volume maintenance
    BAD utility — Utilities 1-2
    BRU utility — Utilities 1-3
    DSC utility — Utilities 1-3
    FMT utility — Utilities 1-2
    VFY utility — Utilities 1-3
Utility programs — Program Development 1-8 to 1-9

V

V command — ODT 2-11
  ZAP utility — Utilities 15-17
V register — ODT 2-7, 5-5
/V switch — Error Logging 3-7
Variable — ODT 2-1
  testing — MCR Operations 4-51
Variable with fixed control
  See VFC
Variable-length record
  magtape — I/O Operations 1-4
  nonsequenced — I/O Operations 1-4
  sequenced — I/O Operations 1-4
Variable-length record format — RMS-11 Introduction 3-2; RMS-11 User's Guide 1-11, 2-15
  See also FB$VAR code in RFM field

Variable-length record format (Cont.)
  and medium — RMS-11 User's Guide 2-15
VAX/VMS — EDT Editor 2-2; Introduction 1-6
  See also DCL
  remote access — RMS-11 User's Guide B-1, B-3
VAX/VMS DCL — Command Language 1-19
VAX/VMS system prompts and CLI — EDT Editor 2-3
/VB switch
  CMP utility — Utilities 12-3
VBN — RMS-11 Introduction 2-4; RMS-11 User's Guide 8-11
  See also BKT field in RAB
  access — RMS-11 Introduction 3-12, 4-7; RMS-11 User's Guide 1-20
  areas — RMS-11 User's Guide 6-10
VBN access
  See BKT field in RAB
VCB
  role of
    in I/O data structure — Writing I/O Driver 2-20
/VE switch
  FLX utility — Utilities 4-8
/VEC switch
  BAD utility — Utilities 6-9
  DSC utility — Utilities 8-23
Vector
  altering using CNF — System Generation (11M) 2-4
  autoload — Task Builder 3-20, 4-4
    conventional task — Task Builder B-17
    eliminating unnecessary — Task Builder 4-6
    I- and D-space format — Task Builder 4-5
    I- and D-space task — Task Builder B-17
    in region — Task Builder 5-12
  data transfer
    size of — System Generation (11M) 4-37
  definition — System Generation (11M) 1-4
  floating — System Generation (11M) E-3
  highest interrupt — System Generation (11M) 4-16
  in task header
    extension area format — Task Builder B-13
  ODT — Task Builder 11-24
  overlaid region — Task Builder 5-11
    I- and D-space task — Task Builder 5-11
  SST address — Task Builder 11-27
Vector register — ODT 5-7
  reentry — ODT 2-6
Verification
  device
    BAD utility — Utilities 6-3
  file structure
    VFY utility — Utilities 9-1
  task image file content
    See ZAP utility
VERIFY command
  IOX — System Management 4-62
    effect on NFS volume — System Management 4-7
VERIFY ON/OFF command
  EDI editor — Utilities 2-49
/VERIFY qualifier
  BRU utility — Utilities 7-22
/VERIFY switch
  DSC utility — Utilities 8-18
  FMT utility — Utilities 5-9
Version
  file — RMS-11 User's Guide A-3, A-5

Version
  file (Cont.)
    default — RMS-11 User's Guide A-6
Version identifier
  See also .IDENT directive
  assembler — PDP-11 MACRO-11 6-4
  standard — PDP-11 MACRO-11 E-14
Version number — Introduction 1-14, 3-11
  file — Command Language 4-3
  RMSBCK utility — RMS-11 Utilities 6-5
  RMSCNV utility — RMS-11 Utilities 4-9
  RMSDEF utility — RMS-11 Utilities A-5
  RMSDES utility — RMS-11 Utilities 2-16
  RMSDSP utility — RMS-11 Utilities 5-5
  RMSIFL utility — RMS-11 Utilities 3-5
  RMSRST utility — RMS-11 Utilities 7-5
  SHOW VERSION command — EDT Editor 9-17
  systems without — EDT Editor 4-5
Version number directive — PDP-11 MACRO-11 6-16 to 6-17
Vertical fill characters option — MCR Operations 3-206; System Management 10-64
Vertical format control
  line printer — I/O Drivers 10-5 to 10-6
  terminal — I/O Drivers 2-33, 3-26 to 3-27
Vertical tab — Command Language 3-22
$VEXT
  low-memory context — Task Builder B-10
  reserved global symbol — Task Builder E-2
VFC carriage control
  See FB$PRN mask in RAT field
VFC header buffer address
  See RHB field in RAB
VFC record — EDT Editor 6-3; RMS-11 Introduction 3-2; RMS-11 User's Guide 1-11, 2-16
  See also FB$VFC code in RFM field
/VFILL keyword
  SET command — MCR Operations 3-206
    VMR — System Management 10-64
VFY utility — Command Language 5-12; I/O Operations 3-12
  command line — Utilities 9-2
  error message — Utilities 9-11
  file error reporting — Utilities 9-8
  operation mode — Utilities 9-3
  switch — Utilities 9-4
    summary — Utilities 9-4
  validity check — Utilities 9-3
/VI keyword
  HOME command — MCR Operations 3-74
  INI command — MCR Operations 3-84
  MOUNT command — MCR Operations 3-125
Video terminal
  See VT52, VT100
Virgin system
  bootstrap — System Generation (11M) 6-2
    nonstandard unmapped — System Generation (11M) 6-13
  definition — System Generation (11M) 1-6
Virtual address space — Executive 3-2
Virtual address window — Executive 3-2
  creating — Executive 5-36
Virtual block — RMS-11 Introduction 2-3
  definition of — I/O Operations 1-3
  magtape — I/O Operations 1-4
  reading — I/O Drivers 1-28
  writing — I/O Drivers 1-29

Virtual block number
  See BKT field in RAB
  See VBN
Virtual I/O — I/O Drivers 1-2
Virtual memory management — System Library 8-1
  See also Memory management
  address conversion ($CVRL) — System Library 8-24
  $ALBLK routine — System Library 8-10
  allocate ($ALVRT) — System Library 8-16
  allocate small virtual block ($ALSVB) — System Library 8-18
  $ALSVB routine — System Library 8-19
  $ALVRT routine — System Library 8-17
  core allocation — System Library 8-8
  core blocks request ($RQVCB) — System Library 8-20
  $CVLOK routine — System Library 8-24
  $CVRL routine — System Library 8-25
  error handling — System Library 8-2
  $EXTSK routine — System Library 8-14
  find page ($FNDPG) — System Library 8-27
  $FNDPG routine — System Library 8-28
  $GTCOR routine — System Library 8-12
  initialize ($INIVM) — System Library 8-5
  $IVIVM routine — System Library 8-7
  $LCKPG routine — System Library 8-31
  library — Program Development 1-11
  library file — System Library 8-4
  lock page ($LCKPG) — System Library 8-30
  memory storage
    allocate block ($ALBLK) — System Library 8-9
    extend task ($EXTSK) — System Library 8-13
    get core ($GTCOR) — System Library 8-11
  page lock ($CVLOK) — System Library 8-22
  $RDPAG routine — System Library 8-27
  read page ($RDPAG) — System Library 8-26
  $RQVCB routine — System Library 8-21
  task builder requirements — System Library 8-3
  unlock page ($UNLPG) — System Library 8-31
  $UNLPG routine — System Library B-32
  write marked page ($WRMPG) — System Library 8-28
  write page ($WRPAG) — System Library 8-14
  $WRMPG routine — System Library 8-29
  $WRPAG routine — System Library 8-15
Virtual Monitor Console Routine
  See VMR
Virtual-to-logical block mapping
  optimizations — RMS-11 User's Guide 8-11
VMLIB.OLB — Program Development 1-11; Command Language 6-40
VMR — System Generation (11S) 1-2 to 1-3; System Management 10-1
  See also SYSVMR.CMD
  command
    line — System Management 10-4
      comment in — System Management 10-5
    name — System Management 10-4
    parameter — System Management 10-4
    summary — System Management 10-5
  configuring Executive — System Generation (11S) 4-10
  creating partition — System Generation (11S) 4-10
  editing SYSVMR.CMD — System Generation (11M) 5-14
  error message — System Management 10-76
  establishing system features — System Generation (11M) 6-9, 6-19
  file specification — System Management 10-3
  /IM switch — System Management 10-4

VMR (Cont.)
  indirect command file — System Management 10-3
  installing task — System Generation (11S) 4-10, 4-14
  invoking from on-line host — System Generation (11M) 5-19
  keyword — System Management 10-4
  loading device driver — System Generation (11S) 4-10
  relationship with MCR — System Management 10-1
  saving system image — System Generation (11S) 4-14
  starting — System Management 10-1
  terminating — System Management 10-3
VMSTIME — Error Logging 5-7
/VOL keyword
  MOUNT command — MCR Operations 3-126
Volatile register dump — Crash Dump Analyzer 3-1 to 3-2
Volume — Introduction 5-5, 5-12, Gloss-36; Command Language 4-1, 5-3 to 5-4, 5-26 to 5-27, 5-29 to 5-42; MCR Operations 2-1
  advancing to next
    See NXTVOL operation
  backing up
    BRU utility — Utilities 7-1
  compressing
    DSC utility — Utilities 8-3
  dedicating — MCR Operations 3-124
  density
    specifying — MCR Operations 3-119
  directory listing
    FLX utility — Utilities 4-7
  disk — Command Language 5-3 to 5-4, 5-38
  dismounting — MCR Operations 3-49
  displaying free space
    PIP utility — Utilities 3-23
    VFY utility — Utilities 9-5
  examining data
    DMP utility — Utilities 11-1
  file
    deleting
      FLX utility — Utilities 4-7
    recovering lost
      VFY utility — Utilities 9-6
    transferring
      FLX utility — Utilities 4-4
  Files-11 — MCR Operations 2-1
    bad block
      entering — MCR Operations 3-78
      marking — MCR Operations 3-77
    default protection
      specifying — MCR Operations 3-73, 3-84, 3-123
    directory
      accessing — MCR Operations 3-72, 3-82, 3-121
    home block
      modifying — MCR Operations 3-71
    initializing — MCR Operations 3-76
    label
      overriding — MCR Operations 3-73
      specifying — MCR Operations 3-73, 3-77
    level — MCR Operations 3-82
    owner
      specifying — MCR Operations 3-73 to 3-74, 3-83 to 3-84
    preparing — MCR Operations 2-1
    protecting with TEMPORARYFILE — System Management 4-61
    supported — MCR Operations 2-1

Volume (Cont.)
  foreign — Command Language 5-9 to 5-10, 5-12 to 5-13, 5-26, 5-29; MCR Operations 2-1
    accessing — MCR Operations 2-1
    specifying — MCR Operations 3-120
  formatting
    FLX utility — Utilities 4-4
    FMT utility — Utilities 5-1
  information
    displaying — MCR Operations 3-125
  initializing
    BRU utility — Utilities 7-17
    FLX utility — Utilities 4-2
  label
    overriding — MCR Operations 3-122
  listing file-ID
    VFY utility — Utilities 9-6
  locating bad block
    BAD utility — Utilities 6-1
    FMT utility — Utilities 5-1
    VFY utility — Utilities 9-7
  magnetic tape — RMS-11 Introduction 2-5
  magtape
    labeled — Command Language 5-4, 5-35 to 5-36
    unlabeled — Command Language 5-4, 5-35 to 5-36
  mounted — Command Language 5-9, 5-13
  mounting — MCR Operations 3-114
    ACP
      specifying — MCR Operations 3-118
    multiple times — MCR Operations 3-124
    operator assistance
      requesting — MCR Operations 3-126
  NFS
    block range altering — System Management 4-50
    block range display — System Management 4-50
    list of parameter commands for — System Management 4-8
    retries upon error — System Management 4-54
    selecting
      with IOX — System Management 4-56
      with VERIFY — System Management 4-62
  owner
    specifying — MCR Operations 3-124
  private — MCR Operations 3-115
  protection — Command Language 4-9
  public — MCR Operations 3-115
    accessing — MCR Operations 3-123
  recovering
    lost block
      VFY utility — Utilities 9-7
    lost file
      VFY utility — Utilities 9-6
    space
      DSC utility — Utilities 8-3
  restoring
    BRU utility — Utilities 7-1
  selecting
    Files-11 for IOX — System Management 4-7
    NFS for IOX — System Management 4-7
  shareable — Command Language 5-31, 5-38
  shared — MCR Operations 3-115
  unmounted
    accessing — MCR Operations 3-114
  verifying — Utilities 9-1

Volume
  verifying (Cont.)
    block
      VFY utility — Utilities 9-7
  write-enabled
    specifying — MCR Operations 3-127
Volume Control Block
  See VCB
Volume Home Block — Command Language 5-11, 5-47 to 5-59, 9-18, 9-20
Volume Identifier — MCR Operations 3-116
  See also Volume-ID
  specifying — MCR Operations 3-126
Volume label — Command Language 5-28
Volume label switch — Error Logging 3-7
Volume protection — Command Language 5-38, 5-52, 5-58
Volume-ID — Command Language 5-38 to 5-40
VOLUMECHECK command
  IOX — System Management 4-63
VS60 — I/O Drivers 20-1
VSECT option — Task Builder 11-38
VT05B — I/O Drivers 2-5, 3-3
VT100 — Introduction 1-3, 1-16 to 1-17; Command Language 3-1, 3-14; I/O Drivers 2-5, 3-4
  CHAR function — EDT Editor 5-16
  EDT editing — EDT Editor 1-9
  escape sequence format — I/O Drivers 2-31
  FILL function — EDT Editor 5-49
  HELP text — EDT Editor 1-4
  keyboard and keypad — EDT Editor 1-6
  keypad editing — EDT Editor 1-2, 2-4, 5-4
  keypad number — EDT Editor 10-3
  nokeypad editing — EDT Editor 2-36, 8-1
  select range — EDT Editor 2-12, 5-33
  SET KEYPAD — EDT Editor 9-5
  SET NOKEYPAD — EDT Editor 9-5
  SET SCREEN — EDT Editor 9-6
  SET TERMINAL — EDT Editor 9-12
  SHOW TERMINAL — EDT Editor 9-17
VT101 — I/O Drivers 2-6
VT102 — I/O Drivers 2-6
VT105 — I/O Drivers 2-6
VT11 — I/O Drivers 20-1
VT131 — I/O Drivers 2-6
VT50 — I/O Drivers 2-5, 3-3
VT50H — I/O Drivers 2-5, 3-3
VT52 — Introduction 1-2, 1-16 to 1-17; Command Language 3-1, 3-14, 3-18; I/O Drivers 2-5, 3-4
  EDT editing — EDT Editor 1-9
  FILL function — EDT Editor 5-49
  HELP text — EDT Editor 1-4
  keypad editing — EDT Editor 1-2, 2-4, 5-3
  keypad number — EDT Editor 10-3
  nokeypad editing — EDT Editor 2-36, 8-1
  select range — EDT Editor 2-12, 5-33
  SET KEYPAD — EDT Editor 9-5
  SET NOKEYPAD — EDT Editor 9-5
  SET SCREEN — EDT Editor 9-6
  SET TERMINAL — EDT Editor 9-12
  SHOW TERMINAL — EDT Editor 9-17
VT55 — I/O Drivers 2-5, 3-4
VT61 — I/O Drivers 2-5, 3-4

W

W command — ODT 2-11, 6-3
W register — ODT 2-6, 5-3
/W switch — Error Logging 3-7, 3-21
W.NLEN — Executive 5-36
W.NOFF — Executive 5-36
WAIT command
  IOX — System Management 4-64
.WAIT directive — MCR Operations 4-55
  example — MCR Operations 4-55
  format — MCR Operations 4-55
Wait For Logical OR Of Event Flags directive — Executive 5-223
Wait For Significant Event directive — Executive 5-221
Wait For Single Event Flag directive — Executive 5-225
/WAIT keyword
  MOUNT command — MCR Operations 3-126
$WAIT macro — RMS-11 Macros 5-126
  RSTS/E — RMS-11 Macros D-4
WAIT operation — RMS-11 Introduction 4-4; RMS-11 User's Guide 1-15
  block stream — RMS-11 Macros 4-14
  record stream — RMS-11 Macros 4-9
  $WAIT macro — RMS-11 Macros 5-126
WAIT$ — I/O Operations 3-35 to 3-36
WAIT$ macro call
  format — I/O Operations 3-36
  parameters — I/O Operations 3-36 to 3-37
$WALFN
  predefined syntax element in MML — System Management 12-40
WB
  role of
    in I/O data structure — Writing I/O Driver 2-19 to 2-20
/WB keyword
  SAVE command — MCR Operations 3-159
WCC field in NAM block
  offset — RMS-11 Macros 6-94
  PARSE operation — RMS-11 Macros 5-87
  SEARCH operation — RMS-11 Macros 5-116, 5-118
  summary — RMS-11 Macros 6-106
/WCHK keyword
  SET command — MCR Operations 3-207
    VMR — System Management 10-65
/WCHK switch
  BAD utility — Utilities 6-9
/WD switch
  DMP utility — Utilities 11-8
WDB — Executive 3-14, 3-16, 3-18
  assigned setting — Executive 3-19
  format — Executive 3-14 to 3-15
  generating — Executive 3-16 to 3-17
  generating in FORTRAN — Executive 3-18
WDBBK$ — Executive 3-17
  macro call — Executive 3-17
  macro expansion — Executive 3-17
WDBDF$ — Executive 3-17
.WDFDR — I/O Operations 4-3
.WDFFP — I/O Operations 4-5
.WDFUI — I/O Operations 4-4
WDI field in NAM block
  offset — RMS-11 Macros 6-94
  PARSE operation — RMS-11 Macros 5-87
  SEARCH operation — RMS-11 Macros 5-116, 5-118

WDI field in NAM block (Cont.)
  summary — RMS-11 Macros 6-107
$WDONUM
  predefined syntax element in MML — System Management 12-40
/WF switch
  RMSCNV utility — RMS-11 Utilities 4-14
$WFIL
  predefined syntax element in MML — System Management 12-41
$WFILE
  predefined syntax element in MML — System Management 12-41
WHILE/UNTIL/DO statement — Error Logging 5-35
WHOLE
  range specification — EDT Editor 6-10
/WI switch — Task Builder 10-51
WIDE argument — PDP-11 MACRO-11 8-11 to 8-12
Width of text
  limiting — EDT Editor 5-49
Width switch — Error Logging 3-7, 3-21
Wildcard — Introduction 3-1 to 3-5, 3-8, 3-10 to 3-11, Gloss-36; Command Language 3-16, 4-6 to 4-8; MCR Operations 2-6; RMS-11 Introduction 4-1
  asterisk — Introduction 3-2; MCR Operations 2-6
  directory context
    See WDI field in NAM block
  file context
    See WCC field in NAM block
  file specification — RMS-11 User's Guide A-2 to A-3
    BRU utility — Utilities 7-7
    FLX utility — Utilities 4-3
    PIP utility — Utilities 3-7
  loops — RMS-11 User's Guide A-4
  operation
    See NB$WCH mask in FNB field
  percent sign — Introduction 3-4
Wildcard loop — RMS-11 Macros 3-8
Wildcard operations — I/O Operations 4-14
  effects of N.STAT — I/O Operations 4-13
  .FIND — I/O Operations 4-13
/WIN keyword
  HOME command — MCR Operations 3-74
  INI command — MCR Operations 3-84
  MOUNT command — MCR Operations 3-127
Window — Task Builder 2-20 to 2-22; RMS-11 User's Guide 8-11
  block — Task Builder 2-20 to 2-22
    creating a — Task Builder 5-14
    for a region — Task Builder 5-14
    in overlay — Task Builder 3-48
  definition block — Executive 3-14; Task Builder 2-22
  descriptor — Task Builder B-20 to B-21
    in overlay — Task Builder 3-20
  for region and linking task — Task Builder 5-15
  identification number — Executive 3-3
  option — Task Builder 11-39
  region — Task Builder 5-25
  turning — RMS-11 User's Guide 8-11
    areas — RMS-11 User's Guide 8-13
    contiguity — RMS-11 User's Guide 8-12
    F11ACP size — RMS-11 User's Guide 8-13
    optimizations — RMS-11 User's Guide 8-12

Window
  turning (Cont.)
    window size — RMS-11 User's Guide 8-12
  virtual address — Executive 3-2 to 3-3
  wrap around
    in virtual sections — Task Builder 5-54
Window block — Executive 5-36
  See also WB
Window Definition Block — Executive 5-36 to 5-37, 5-39, 5-58 to 5-59, 5-87, 5-101
  See also WDB
Window definition block — Executive 5-38, 5-189
Window ID — Executive 5-36
Window status word — Executive 5-36, 5-101
/WINDOWS qualifier
  BRU utility — Utilities 7-22
WK:
  pseudo device — Command Language 5-6
/WLT switch
  FMT utility — Utilities 5-9
$$WNDS
  reserved PSECT name — Task Builder E-4
WNDWS option — Task Builder 11-39
$WONUM
  predefined syntax element in MML — System Management 12-40
Word — RMS-11 Introduction 2-1
  memory — Introduction 5-6, Gloss-36
.WORD directive — PDP-11 MACRO-11 6-24 to 6-25
  implicit — PDP-11 MACRO-11 2-1, 2-4, 6-25
WORD function — EDT Editor 2-12, 5-17
Word location
  displaying — ODT 4-2 to 4-6
  opening — ODT 4-2 to 4-6
Word mode
  operator
    ASCII — ODT 2-7, 4-6
    octal — ODT 2-7, 4-2 to 4-3
    Radix-50 — ODT 2-7
Word wrap
  setting — EDT Editor 5-50
Work file
  accesses
    system overhead — Task Builder F-2, F-5 to F-7
  assembler — PDP-11 MACRO-11 F-1
  parameters for — Task Builder F-2
  performance
    changing device to improve — Task Builder F-5
World group — MCR Operations 2-3
/WRAP keyword
  SET command — MCR Operations 3-208
    VMR — System Management 10-65
Wrap-around option — MCR Operations 3-208, System Management 10-65
Wrapping
  line
    EDT — Introduction 2-16
Writable-block context — RMS-11 Macros 4-12
Write — Introduction Gloss-36
  access — MCR Operations 2-3
  break-through — I/O Drivers 2-22
  checking
    specifying — MCR Operations 3-207
Write checking
  specifying — System Management 10-65

WRITE command — EDT Editor 2-36, 7-22
  EDI editor — Utilities 2-49
WRITE GROUP statement — Error Logging 5-31
/WRITE keyword
  MOUNT command — MCR Operations 3-127
Write logical record
  random mode — I/O Operations 3-28
  sequential mode — I/O Operations 3-30
$WRITE macro
  sequential access — RMS-11 Macros 5-127
  VBN access — RMS-11 Macros 5-129
WRITE operation — RMS-11 Introduction 4-7
  RMS-11 Macros 4-14
  access modes — RMS-11 Introduction 4-7
  and shared access — RMS-11 User's Guide 2-6
  $WRITE macro
    sequential access — RMS-11 Macros 5-127
    VBN access — RMS-11 Macros 5-129
WRITE statement — Error Logging 4-30, 5-31
Write virtual block — I/O Operations 3-34
WRITE$ — I/O Operations 3-34
  FDB — I/O Operations 3-35
WRITE$ macro call
  format — I/O Operations 3-34 to 3-35
  parameters — I/O Operations 3-35
Write-behind multiple buffering — I/O Operations 2-19
Write-check
  enabling in IOX — System Management 4-65
Write-lock
  software support — System Generation (11M) 4-32
  write-back cache data
    handling in RCT — System Management 5-5
WRITECHECK command
  IOX — System Management 4-65
$WRMPG (Write marked page) — System Library 8-28
$WRPAG (Write page) — System Library 8-14
WS.MAP — Executive 5-36
WSIG$S — Executive 5-221
WTLO$ — Executive 5-223
WTSE$ — Executive 5-225
  I/O Drivers 1-24
$WUIC
  predefined syntax element in
    MML — System Management 12-42

X

X command — ODT 1-4, 2-11
  ODT — Program Development 5-8
  ZAP utility — Utilities 15-16
X register — ODT 2-6, 5-3, 5-7
x symbol — ODT 2-1
X$-family macro — RMS-11 Macros 2-9
  declaring
    ALL block — RMS-11 Macros C-3
    DAT block — RMS-11 Macros C-3
    KEY block — RMS-11 Macros C-3
    PRO block — RMS-11 Macros C-3
    SUM block — RMS-11 Macros C-3
XAB
  See also ALL block
  See also DAT block
  See also KEY block
  See also PRO block
  See also SUM block
  chaining to FAB — RMS-11 Macros 2-12

XAB field in FAB
  chaining XABs to FAB — RMS-11 Macros 2-12
  CLOSE operation — RMS-11 Macros 5-3
  CREATE operation — RMS-11 Macros 5-9
  DISPLAY operation — RMS-11 Macros 5-29
  ENTER operation — RMS-11 Macros 5-35
  ERASE operation — RMS-11 Macros 5-40
  EXTEND operation — RMS-11 Macros 5-46
  offset — RMS-11 Macros 6-24
  OPEN operation — RMS-11 Macros 5-73
  PARSE operation — RMS-11 Macros 5-86
  REMOVE operation — RMS-11 Macros 5-102
  RENAME operation — RMS-11 Macros 5-108
  SEARCH operation — RMS-11 Macros 5-116
  summary — RMS-11 Macros 6-66
XAB$B macro — RMS-11 Macros 2-8, C-3
XAB$BT macro — RMS-11 Macros C-4
XAB$E macro — RMS-11 Macros 2-9
  declaring — RMS-11 Macros C-3
XABOF$ macro — RMS-11 Macros C-4
XB$-family symbol
  declaring
    ALL block — RMS-11 Macros C-3 to C-4
    DAT block — RMS-11 Macros C-3 to C-4
    KEY block — RMS-11 Macros C-3 to C-4
    PRO block — RMS-11 Macros C-3 to C-4
    SUM block — RMS-11 Macros C-3 to C-4
    XAB — RMS-11 Macros C-4
XB$ALL code in COD field — RMS-11 Macros 2-8
  summary — RMS-11 Macros 6-10
  value — RMS-11 Macros 6-2
XB$BN2 code in DTP field
  CREATE operation — RMS-11 Macros 5-18
  DISPLAY operation — RMS-11 Macros 5-31
  OPEN operation — RMS-11 Macros 5-80
  value — RMS-11 Macros 6-67
XB$BN4 code in DTP field
  CREATE operation — RMS-11 Macros 5-18
  DISPLAY operation — RMS-11 Macros 5-31
  OPEN operation — RMS-11 Macros 5-80
  value — RMS-11 Macros 6-67
XB$CHG mask in FLG field
  CREATE operation — RMS-11 Macros 5-19
  DISPLAY operation — RMS-11 Macros 5-31
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-76
  value — RMS-11 Macros 6-67
XB$CTG mask in AOP field
  CREATE operation — RMS-11 Macros 5-18
  EXTEND operation — RMS-11 Macros 5-47
  OPEN operation — RMS-11 Macros 5-79
  RSTS/E — RMS-11 Macros D-4
  summary — RMS-11 Macros 6-6
  value — RMS-11 Macros 6-2
XB$CYL mask in ALN field
  RSTS/E — RMS-11 Macros D-3 to D-4
XB$DAT code in COD field — RMS-11 Macros 2-8
  summary — RMS-11 Macros 6-17
  value — RMS-11 Macros 6-14
XB$DTL code in BLN field
  summary — RMS-11 Macros 6-15
  value — RMS-11 Macros 6-14
XB$DUP mask in FLG field
  CREATE operation — RMS-11 Macros 5-19
  DISPLAY operation — RMS-11 Macros 5-31
  OPEN operation — RMS-11 Macros 5-80
  summary — RMS-11 Macros 6-77

XB$DUP mask in FLG field (Cont.)
  value RMS-11 Macros 6-67
XB$HRD mask in AOP field
  CREATE operation RMS-11 Macros 5-17
  EXTEND operation RMS-11 Macros 5-47
  of ALL block
    RSX-11 RMS-11 Macros D-4
  OPEN operation RMS-11 Macros 5-79
  RSTS/E RMS-11 Macros D-4
  summary RMS-11 Macros 6-7
  value RMS-11 Macros 6-2
XB$IN2 code in DTP field
  CREATE operation RMS-11 Macros 5-18
  DISPLAY operation RMS-11 Macros 5-31
  OPEN operation RMS-11 Macros 5-80
  value RMS-11 Macros 6-67
XB$IN4 code in DTP field
  CREATE operation RMS-11 Macros 5-18
  DISPLAY operation RMS-11 Macros 5-31
  OPEN operation RMS-11 Macros 5-80
  value RMS-11 Macros 6-67
XB$INI mask in FLG field
  DISPLAY operation RMS-11 Macros 5-31
  OPEN operation RMS-11 Macros 5-80
  value RMS-11 Macros 6-67
XB$KEY code in COD field RMS-11 Macros 2-8
  summary RMS-11 Macros 6-70
  value RMS-11 Macros 6-67
XB$KYL code in BLN field
  summary RMS-11 Macros 6-69
  value RMS-11 Macros 6-67
XB$LAL code in BLN field
  summary RMS-11 Macros 6-9
  value RMS-11 Macros 6-2
XB$LBN mask in ALN field
  CREATE operation RMS-11 Macros 5-17
  EXTEND operation RMS-11 Macros 5-47
  RSTS/E RMS-11 Macros D-3 to D-4
  value RMS-11 Macros 6-2
XB$NUL mask in FLG field
  CREATE operation RMS-11 Macros 5-19
  DISPLAY operation RMS-11 Macros 5-31
  OPEN operation RMS-11 Macros 5-80
  summary RMS-11 Macros 6-78
  value RMS-11 Macros 6-67
XB$PAC code in DTP field
  CREATE operation RMS-11 Macros 5-18
  DISPLAY operation RMS-11 Macros 5-31
  OPEN operation RMS-11 Macros 5-80
  value RMS-11 Macros 6-67
XB$PRL code in BLN field
  summary RMS-11 Macros 6-109
  value RMS-11 Macros 6-108
XB$PRO code in COD field RMS-11 Macros 2-8
  summary RMS-11 Macros 6-110
  value RMS-11 Macros 6-108
XB$SML code in BLN field
  summary RMS-11 Macros 6-146
  value RMS-11 Macros 6-145
XB$STG code in DTP field
  CREATE operation RMS-11 Macros 5-18
  DISPLAY operation RMS-11 Macros 5-31
  OPEN operation RMS-11 Macros 5-80
  value RMS-11 Macros 6-67
XB$SUM code in COD field RMS-11 Macros 2-8
  summary RMS-11 Macros 6-147
  value RMS-11 Macros 6-145

XB$VBN mask in ALN field
  CREATE operation — RMS-11 Macros 5-17
  EXTEND operation — RMS-11 Macros 5-47
  RSTS/E — RMS-11 Macros D-3 to D-4
  value — RMS-11 Macros 6-2
XBAOF$ macro — RMS-11 Macros C-4
XBDOF$ macro — RMS-11 Macros C-4
XBKOF$ macro — RMS-11 Macros C-4
XBPOF$ macro — RMS-11 Macros C-4
XBSOF$ macro — RMS-11 Macros C-4
XDT — Crash Dump Analyzer 1-2; System Generation (11M) 4-33
  debugging driver code — Writing I/O Driver 3-17 to 3-18
  ODT features and commands not included — Writing I/O Driver 3-17
  using — MCR Operations 3-26
/XH switch — Task Builder 10-52
.XQIO — I/O Operations 4-20
.XQT directive — MCR Operations 4-55
  example — MCR Operations 4-56
  format — MCR Operations 4-56
/XT switch — Task Builder 10-53
$xxDAT label — Writing I/O Driver 3-9
$xxEND label — Writing I/O Driver 3-9
$xxINP symbol — Writing I/O Driver 3-5
$xxINT symbol — Writing I/O Driver 3-5
$xxOUT symbol — Writing I/O Driver 3-5
$xxTBL label
  on DDT — Writing I/O Driver 4-10
$xxTBL symbol — Writing I/O Driver 3-5
/xxx keyword
  HELP command — MCR Operations 3-66

Y

/@Y switch
  FMT utility — Utilities 5-9

Z

Z command — ODT 2-11
Z error — PDP-11 MACRO-11 5-4
  summary — PDP-11 MACRO-11 D-5
ZAP utility
  address boundary
    displaying — Utilities 15-3
  addressing mode — Utilities 15-4
  command
    carriage return — Utilities 15-7
    general purpose — Utilities 15-7
      summary — Utilities 15-15
    open/close location — Utilities 15-7
      summary — Utilities 15-11
  command line — Utilities 15-6
    element — Utilities 15-8
  error message — Utilities 15-23
  example — Utilities 15-18
  indirect command file — Utilities 15-6
  initiating (invoking) — Utilities 15-5
  location
    addressing — Utilities 15-4
    closing — Utilities 15-13
    contents
      changing — Utilities 15-13
      displaying — Utilities 15-12
      verifying — Utilities 15-18
    opening — Utilities 15-12

ZAP utility
  location (Cont.)
    specifying **Utilities** 15-10
  ODT on-line debugger **Utilities** 15-1
  operating mode **Utilities** 15-2
  register
    setting value **Utilities** 15-18
  relocation biases **Utilities** 15-4
  switch **Utilities** 15-2
  task image file **Utilities** 15-3
    I- and D-space **Utilities** 15-3
    multiuser **Utilities** 15-3
    resident library **Utilities** 15-3
  terminating **Utilities** 15-5
/ZE switch
  FLX utility **Utilities** 4-8
Zero byte, appending to character
    string **PDP-11 MACRO-11** 6-28

READER'S COMMENTS

NOTE: This form is for document comments only. DIGITAL will use comments submitted on this form at the company's discretion. If you require a written reply and are eligible to receive one under Software Performance Report (SPR) service, submit your comments on an SPR form.

Did you find this manual understandable, usable, and well organized? Please make suggestions for improvement.

Did you find errors in this manual? If so, specify the error and the page number.

Please indicate the type of user/reader that you most nearly represent.

- ☐ Assembly language programmer
- ☐ Higher-level language programmer
- ☐ Occasional programmer (experienced)
- ☐ User with little programming experience
- ☐ Student programmer
- ☐ Other (please specify) _____

Name _____ Date _____

Organization _____

Street _____

City _____ State _____ Zip Code _____
or Country

Do Not Tear - Fold Here and Tape

digital

No Postage Necessary if Mailed in the United States

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO.33 MAYNARD MASS.

POSTAGE WILL BE PAID BY ADDRESSEE

BSSG PUBLICATIONS ZK1-3/J35
DIGITAL EQUIPMENT CORPORATION
110 SPIT BROOK ROAD
NASHUA, NEW HAMPSHIRE 03061

Do Not Tear - Fold Here

Cut Along Dotted Line